

NOVO

NOVO

2026

NOVO

NOVO (GUANGDONG) HIGH-TECH CO., LTD.

Add: No. 7-1, Jiye Road, Leping Town, Sanshui District, Foshan City.

Tel: +86-757-87263559 E-mail: 001@gznovo.com

www.gznovo.com




**PRODUCT
CATALOGUE**

FULL OF HIGH TECHNOLOGY AND INTELLIGENCE



YouTube

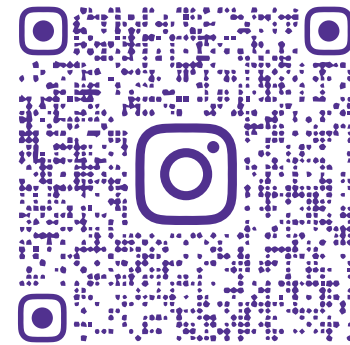

@ NOVO_MOTOR



Instagram



***Annual Tax Payment Exceeds
10 million RMB $\approx$ 1.42 million USD***

100,000m²+
Intelligent Factory

40,000m²+
Ground size

3500+
Staffs (capacity)

300+
National patents

1000+
Products

19 years⁺
More than 19 years
experience

under construction



Catalogue



11-50

Curtain Motor Solution

N31 Curtain Motor	11-20
N99 Curtain Motor	21-28
N21/C10 Curtain Motor	29-46
N23 Curtain Motor	47-48
N17 Curtain Motor	49
N18 Curtain Motor	50

51-66

Vertical Blinds Motor Solution

Q2-LED Dream Blinds Motor	51-56
Q1 Dream Blinds Motor	57-66

67-114

Tubular Motor Solution

22mm Tubular Motor	67-72
25mm Tubular Motor	73-78
35mm Tubular Motor	79-94
45mm Tubular Motor	95-114

115-126

Venetian Blinds Motor Solution

E40 Venetian Blinds Motor	115-126
---------------------------	---------

127-136

Electric Day And Night Honeycomb

E38 Day Night Blinds Motor	127-132
E65 Front and Rear Dual Motor	133-136

137-150

Electric Venetian Blinds Solution

E19 Venetian Blinds Motor	137-145
E14 Venetian Blinds Motor	146
E24 Venetian Blinds Motor	147-150



151-158

Skylight Solution Solution

E24 3rd Generation Skylight Motor	151-153
E24 2nd Generation Skylight Motor	154-156
N19 Skylight Motor	157-158

159-180

Control System Solution

A15 Transmitter	160
A13 Transmitter	161-165
A6 Transmitter	166
A3 Transmitter System	167
A12 Transmitter System	168
A9 Button Sticker Transmitter	169-173
A20 power bank	174
A20 Solar Panel	175
A16 Receiver System	176
A8 Receiver/A8 Switching Power Supply	177
A5 Receiver	178
A3 Six Channels Touch Screen Receiver	179
A21 pavilion receiver	180

181-197

Accessories


198-199

Project case


01-10

Company Profile

Partial
Honours

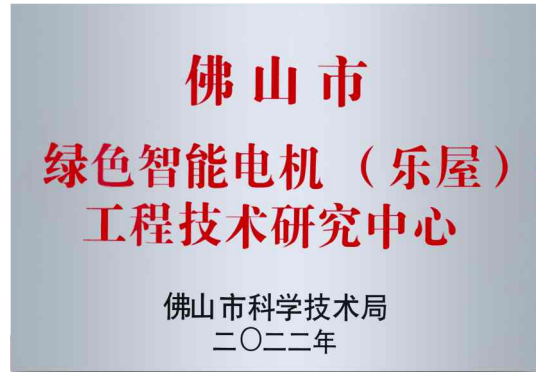

300+
national patents

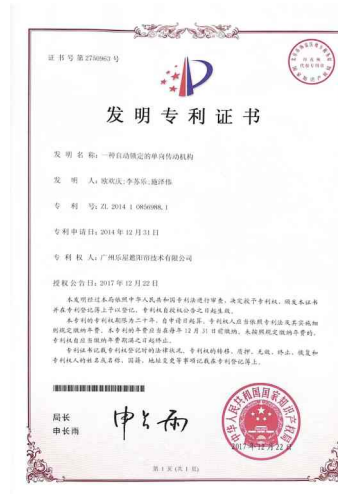

NOVO

Full of smart Sun-shade



5 year warranty

Long warranty | Quality assurance | Worry-free after-sales

Performance test
High voltage test
Noise test
Appearance inspection

Voice control test
Network connection test
Torque test
Grounding test

100% full test on production line

Company Profile

NOVO



NOVO (GUANGDONG) HIGH-TECH CO., LTD., established in 2007, is a premier "Specialized and Innovative" high-tech enterprise integrating R&D, manufacturing, and sales. The company's annual tax contribution exceeds 10 million RMB. Since its inception, NOVO has continuously launched technologically innovative products driven by its robust, self-developed capabilities. Embracing the spirit of craftsmanship, the company focuses exclusively on manufacturing high-performance, high-quality, and high-value original products for smart sunshades and smart clothes racks. As a smart home pioneer, NOVO brings nearly two decades of deep expertise to the electric sunshade industry by aligning with user needs, addressing industry pain points, and driving technological trends. NOVO has always adhered to independent product R&D and technical patent inventions, committing to creating beautiful products that integrate quality, technology, and art. It has successively launched the E-series Venetian blinds motors, N-series curtain motors, K-series tubular motors, Q-series dream/vertical blinds motors, and G-series electric clothes racks etc. Many of NOVO products, such as the vertical blinds motors and ambient light curtain motors, have set industry benchmarks with their innovative design and exceptional quality.

As an industry pioneer and trendsetter, NOVO continuously breaks through tradition and reimagines design concepts. By constantly innovating, the company is redefining the smart home landscape and ushering in a new era of home aesthetics. NOVO is proud to craft an intelligent, artistic, and connected lifestyle powered by advanced technology and AI voice control.

100,000m²+
Intelligent Factory

40,000m²+
Ground size



NOVO

Headquartered in Foshan, Guangdong—a globally renowned hub for home appliances and furniture manufacturing—NOVO is currently constructing a state-of-the-art smart industrial park. Spanning a footprint of approximately 40,000 sqm, the completed park will house a 100,000 sqm "digital & intelligent manufacturing" production base capable of accommodating over 3,500 employees. Driven by technology-intensive, automated manufacturing and strong industrial cluster effects, this landmark project will provide a premier environment and robust infrastructure to fuel NOVO's sustained growth.

Adhering to the highest industry standards, NOVO strictly operates under a robust, certified compliance framework, including ISO 9001 (Quality Management), ISO 10012 / GB/T 19022 (Measurement Management), and GB/T 29490 (Intellectual Property Management). This commitment to systematic and standardized operations guarantees the long-term stability and premium quality of its products and services for global clients.

The company's products are mainly marketed under the "NOVO" brand worldwide. NOVO has established its own marketing networks, agencies, and tiered distributors across various regional markets. It also provides ODM and OEM services for specific regions and international brand customers. The products comply with CE, TUV, FCC, VDE, RoHS, CCC, and other international safety and compatibility certifications, and can meet the mandatory compliance standards of different international markets through customization.





Backed by nearly two decades of technological evolution and deep industry accumulation, NOVO boasts an extensive and diverse portfolio of over 1,000 products and more than 300 proprietary technology patents. Leveraging its formidable technical prowess, NOVO has been successively honored with prestigious awards and titles, including "National High-Tech Enterprise, " "Little Giant Enterprise in Technological Innovation, " and provincial and municipal "SRDI (Specialized, Refined, Unique, and Innovative) Enterprise. " Furthermore, the company houses the "Guangdong Engineering Technology Research Center for Green and Intelligent Motors" and is annually celebrated as a top-tier corporate taxpayer with contributions exceeding 10 million RMB.

NOVO continues to increase its R&D investment and product innovation. Backed by its powerful R&D and innovation capabilities, the company now boasts one engineering technology research center and two engineering technology laboratories. The raw materials for NOVO products are sourced from world-class, well-known brands. Its intelligent manufacturing equipment and automated production lines are introduced from leading domestic and foreign high-end precision giants (such as Samsung, Siemens, Panasonic, Omron, and Han's Laser). At present, the manufacturing center features 8 fully automatic SMT placement lines, 4 fully automatic automated insertion (AI) lines, 2 fully automatic wave soldering lines, fully automatic DC motor assembly robot lines, AC motor stator and rotor production lines, laser engraving systems, AOI optical inspection systems, integrated motor testing systems, CNC precision machining centers, and 72 sets of fully automatic injection molding machines integrated with a centralized feeding and robotic material handling system. NOVO has become an original manufacturer with a fully integrated supply chain and end-to-end manufacturing capabilities.



1000⁺
Employees

300⁺
Engaged in product R&D

19 years⁺
More than 19 years
experience

1000⁺
Products

300⁺
National patents



NOVO focuses on the learning and growth of all employees, recognizing talent as its primary productive force. The company has successively introduced advanced management systems, including ERP, PDM, MES, OA, and HR. Leveraging 5G, the Internet of Things (IoT), cloud computing, and big data, we have achieved a platform-based, automated, digital, and intelligent infrastructure across both office and production environments. Consequently, operational efficiency and service quality are constantly improving. To date, we have provided high-quality products and services to more than 100 countries and regions worldwide, bringing users smart home solutions that seamlessly combine quality, technology, and art.

Relying on its professional technical innovation capabilities and strong market reputation, NOVO has established strategic partnerships with many Fortune Global 500 companies around the world and has the capacity to provide premium OEM services for these world-class enterprises.







Color-changing Ambient Light Curtain Motor System

Advantage

- Three-color adjustable
- 4-level brightness adjustable
- Built-in LED and driver
- Glowing track
- Curve track
- Horizontal hidden motor
- Built-in 8 high-precision bearings
- Adopts high-temperature resistant material
- 25-year design life
- Mobile phone control
- Smart speaker control
- Remote control
- Dry contact/RS485
- Hand pull when power off
- Hand pull start
- Wide Voltage input 100-240V
- Silent working
- Dual-head output, motor left/right mountable
- Offline AI voice,wake anytime

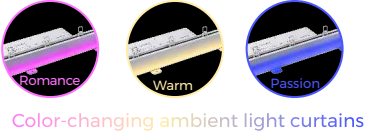










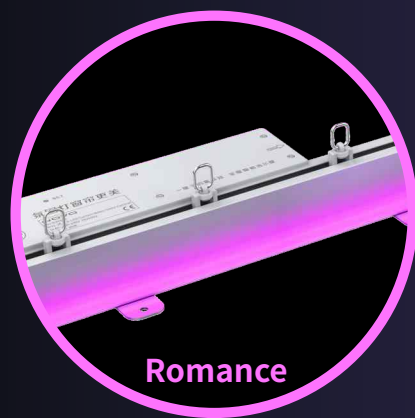

Color-changing ambient light curtains



Color-changing Curtain Motor System
English Voice Control




English Voice Control



Advantage

- Three-color adjustable
 - 4-level brightness adjustable
 - Built-in LED and driver
 - Glowing track
 - Curve track
 - Horizontal hidden motor
- Remote control
 - Hand pull when power off
 - Hand pull start
 - 25-year design life
 - Built-in 8 high-precision bearings
- Wide Voltage input 100-240V
 - Silent working
 - Dual-head output, motor left/right mountable
 - Offline AI voice,wake anytime
 - Adopts high-temperature resistant material

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
N30330	N31-3E-1.8-LED Color-changing Curtain Motor	1.8	100	AC100-240	24	2.5	285	0.72
N30334	N31-3E-1.8-LED Color-changing Curtain Motor-English Voice Control	1.8	100	AC100-240	24	2.5	285	0.72

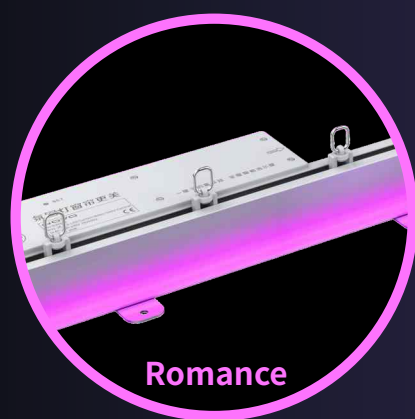

Color-changing ambient light curtains



Color-changing Curtain Motor
System-NTY



Advantage

- Three-color adjustable
- 4-level brightness adjustable
- Built-in LED and driver
- Glowing track
- Curve track
- Horizontal hidden motor
- Mobile phone control
- Smart speaker control
- Remote control
- Hand pull when power off
- Hand pull start
- 25-year design life
- Wide Voltage input 100-240V
- Silent working
- Dual-head output, motor left/right mountable
- Built-in 8 high-precision bearings
- Adopts high-temperature resistant material

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
N30340	N31-3E-1.8-LED Color-changing Curtain Motor-NTY	1.8	100	AC100-240	24	2.5	285	0.72
N30341	N31-3E-1.8-LED Color-changing Curtain Motor-NTY Zigbee	1.8	100	AC100-240	24	2.5	285	0.72



Ambient light Curtain Motor
System-NTY




Advantage

- Built-in LED and driver
- Mobile phone control
- Wide Voltage input 100-240V
- Glowing track
- Smart speaker control
- Silent working
- Curve track
- Remote control
- Dual-head output, motor left/right mountable
- Horizontal hidden motor
- Hand pull when power off
- Built-in 8 high-precision bearings
- Hand pull start
- Adopts high-temperature resistant material

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
N30300	N31-3E-1.5-LED Curtain Motor	1.5	100	AC100-240	24	2.5	285	0.72
N30310	N31-3E-1.5-LED Curtain Motor-NTY ⇄	1.5	100	AC100-240	24	2.5	285	0.72
N30311	N31-3E-1.5-LED Curtain Motor-NTY Zigbee ⇄	1.5	100	AC100-240	24	2.5	285	0.72



Ambient light Curtain Motor
System-Bluetooth



Advantage

- Built-in LED and driver
- Mobile phone control
- Wide Voltage input 100-240V
- Glowing track
- Smart speaker control
- Silent working
- Curve track
- Remote control
- Dual-head output, motor left/right mountable
- Horizontal hidden motor
- Hand pull when power off
- Built-in 8 high-precision bearings
- Hand pull start
- Adopts high-temperature resistant material

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
N30305	N31-3E-1.5-LED Curtain Motor-NMS ⇄	1.5	100	AC100-240	24	2.5	285	0.72



Ambient light Curtain Motor
System-IB

Red: Common

Yellow: Control LED light

White: Off

Gray: On

Green: Mode selection



Advantage

- Built-in LED and driver

Remote control

Wide Voltage input 100-240V
- Glowing track

Hand pull when power off

Silent working
- Curve track

Hand pull start

Dual-head output, motor left/right mountable
- Horizontal hidden motor

Dry contact control
- Built-in 8 high-precision bearings

Adopts high-temperature resistant material

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
N30302	N31-3E-1.5-LED Curtain Motor-IB	1.5	100	AC100-240	24	2.5	285	0.72



Ambient light Curtain Motor
System-485



Advantage

- Built-in LED and driver

Remote control

Wide Voltage input 100-240V
- Glowing track

Dry contact/RS485

Silent working
- Curve track

Hand pull when power off

Dual-head output, motor left/right mountable
- Horizontal hidden motor

Hand pull start
- Built-in 8 high-precision bearings

Adopts high-temperature resistant material

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
N30313	N31-3E-1.5-LED Curtain Motor-485⇄	1.5	100	AC100-240	24	2.5	285	0.72



Smart Curtain System

Advantage

- Masterful Design, Ultimate Invisibility
- One-piece molded body shell
- Wake anytime
- Low power design
- Silent Working
- Support power bank
- Auto limit memory
- 20-year design life
- Mini size,smaller than an ID card
- Standard 90°Chinese plug
- Offline AI voice control
- Smart speaker control
- Moblle phone control
- Type-C interface
- Scene mode
- Remote control



brushed curtain motor



brushless curtain motor

 English Voice Control	 Xiaomi HyperOS Connect  works with Xiaomi Home	 Tuya smart  Zigbee	 485	 Lithium Battery	 Remote control
--	---	---	---	---	---



Smart Curtain System



Advantage

- Masterful Design, Ultimate Invisibility

One-piece molded body shell

Wake anytime

Silent Working

Smart speaker control
- Mini size,smaller than an ID card

Standard 90°Chinese plug

Offline AI voice control

Moblie phone control

Remote control

Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
N30600	N99-3E-1.5 Curtain Motor	1.5	32	88	AC100-240	47x65x80	0.26
N30601	N99-3E-1.5 Curtain Motor-voice Control	1.5	32	88	AC100-240	47x65x80	0.26
N30602	N99-3E-1.5 Curtain Motor-English Voice Control	1.5	32	88	AC100-240	47x65x80	0.26
N30620	N99-3E-2 Brushless Curtain Motor	2	40	88	AC100-240	47x65x80	0.26
N30621	N99-3E-2 Brushless Curtain Motor-Voice Control	2	40	88	AC100-240	47x65x80	0.26
N30622	N99-3E-2 Brushless Curtain Motor-English Voice Control	2	40	88	AC100-240	47x65x80	0.26

Hello Iris, Open curtains

OK, open the curtains




brushed curtain motor



brushless curtain motor



Smart Curtain System



Advantage

- Masterful Design, Ultimate Invisibility

One-piece molded body shell

Silent Working

Auto limit memory

Smart speaker control
- Mini size,smaller than an ID card

Standard 90°Chinese plug

Moblie phone control

Scene mode

20-year design life
- Remote control

Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
N30603	N99-3E-1.5 Curtain Motor-NMS	1.5	32	88	AC100-240	47x65x80	0.26
N30623	N99-3E-2 Brushless Curtain Motor-NMS	2	40	88	AC100-240	47x65x80	0.26




brushed curtain motor



brushless curtain motor



Smart Curtain System



brushed curtain motor



brushless curtain motor

Advantage

- Masterful Design, Ultimate Invisibility

One-piece molded body shell

Silent Working

Auto limit memory

Smart speaker control
- Mini size,smaller than an ID card

Standard 90°Chinese plug

Moblle phone control

Scene mode

20-year design life
- Remote control

Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
N30605	N99-3E-1.5 Curtain Motor-NTY	1.5	32	88	AC100-240	47x65x80	0.26
N30607	N99-3E-1.5 Curtain Motor-NTY Zigbee	1.5	32	88	AC100-240	47x65x80	0.26
N30625	N99-3E-2 Brushless Curtain Motor-NTY	2	40	88	AC100-240	47x65x80	0.26



Smart Curtain System

485

Advantage

- Masterful Design, Ultimate Invisibility

Standard 90° Chinese plug

Top-brand chips,quality guaranteed

Equipped with RS485 and RF control functions
- Mini size,smaller than an ID card

One-piece molded body shell

Remote control



brushed curtain motor

Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
N30608	N99-3E-1.5 Curtain Motor-485	1.5	32	88	AC100-240	47x65x80	0.26



Smart Curtain System



Advantage

- Masterful Design, Ultimate Invisibility
- Mini size,smaller than an ID card
- Low power design
- One-piece molded body shell
- Type-C interface
- Smart speaker control
- Silent Working
- Scene mode
- Remote control
- Smart speaker control
- 20-year design life
- Auto limit memory



brushed curtain motor

Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
N30610	N99-4E-1.5 Curtain Motor-3000mAh	1.5	27	88	5V TYPE-C	47x65x86	0.32
N30611	N99-4E-1.5 Curtain Motor-NMS-3000mAh	1.5	27	88	5V TYPE-C	47x65x86	0.32
N30613	N99-4E-1.5 Curtain Motor-NTY Bluetooth-3000mAh	1.5	27	88	5V TYPE-C	47x65x86	0.32



N99 Intelligent Length Adjustable Track


Smart Curtain System

Advantage

- Adjustable Length
Extendable design for flexible adjustment and easier installation.
- Cross-Track Design
Overlapping track ensures full curtain closure with zero light leakage.
- Silent Working
Quiet track with nano-rollers for smooth and silent gliding.
- Premium Aluminum
High-quality aluminum alloy construction, sturdy, stable, and durable.
- Three Sizes to Meet 90% of Needs

Three typs of sizes

- ① 1.68-3.0m ② 2.18-4.0m ③ 2.43-4.5m

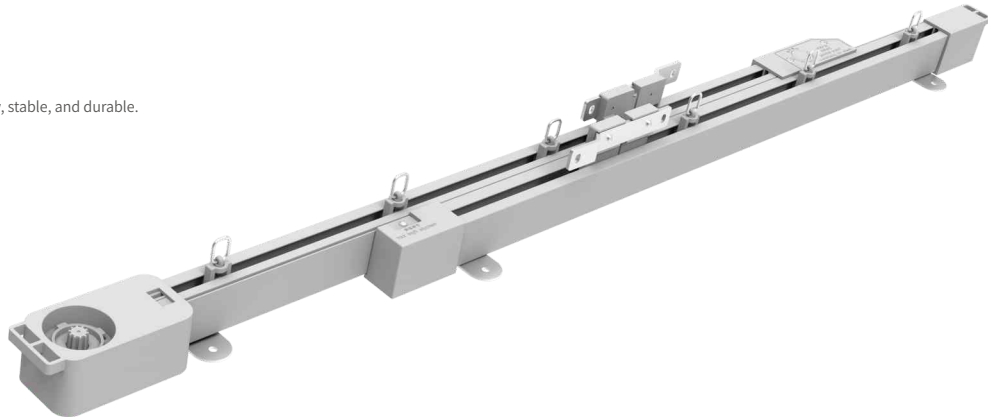


Item NO	Item	Specification
D40017	N99 Length adjustable finished rail 0.52-0.68m	Finished track
D40020	N99 Length adjustable finished rail 1.68-3.0m	Finished track
D40025	N99 Length adjustable finished rail 2.18-4.0m	Finished track
D40030	N99 Length adjustable finished rail 2.43-4.5m	Finished track





Smart Curtain System

Advantage


- ⚡ Low power design
- 🔇 Silent Working
- 🔌 Support fast charging
- 🔋 Support power bank
- 🔌 Type-C interface
- ⚙️ High torque
- 📶 Automatic limit
- 🔄 Sync operation
- 🏠 Home automation switch control
- 🔌 Dry contact control
- ⋯ Support hotel card power supply/dry contact/485 control mode
- 📱 Remote phone control
- 🔊 Smart speaker control
- ↔️ RS-485 with Instant Bi-directional Feedback
- 🕒 Remote control
- 🎭 Scene mode
- 👉 Hand pull when power off
- 👉 Hand pull start

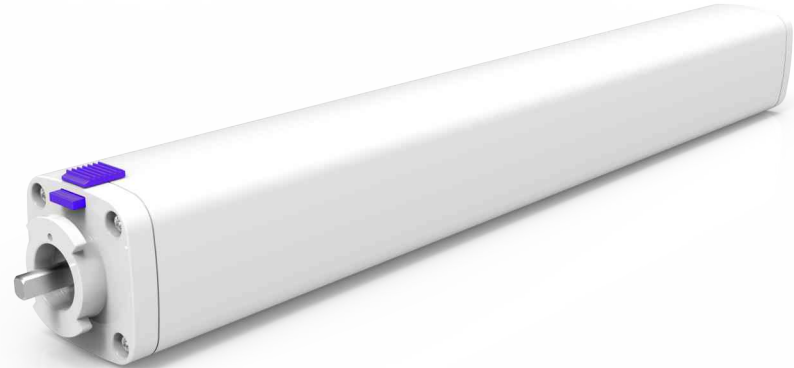

 Tuya smart	 Zigbee	 Xiaomi HyperOS Connect	 works with Xiaomi Home	 485	 Lithium Battery	 Five line
---	---	--	--	--	--	--



Smart Curtain System
NTY

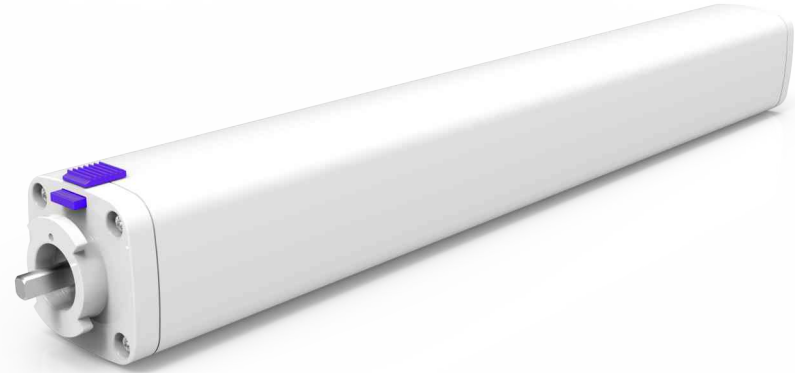



Advantage

- Silent Working
- Remote phone control
- High torque
- Smart speaker control
- Automatic limit
- Scene mode
- Sync operation
- Hand pull start
- Hand pull when power off
- Remote control
- Dry contact control

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30140	N21-3E-12 Curtain Motor N	1.2	36	AC100-240	90	350	0.65
N30146	N21-3E-12 Curtain Motor-NTY ⇄	1.2	36	AC100-240	90	350	0.65



Smart Curtain System
NTY Zigbee

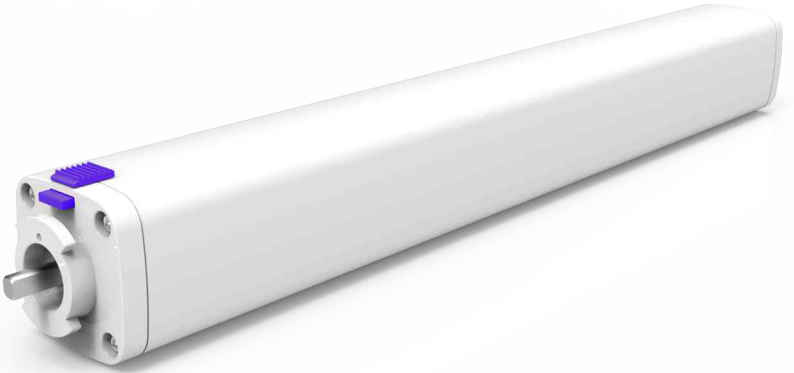

Advantage

- Silent Working
- Remote remote control
- High torque
- Smart speaker control
- Automatic limit
- Scene mode
- Sync operation
- Hand pull start
- Hand pull when power off
- Remote control

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30126	N21-3E-12 Curtain Motor -NTY Zigbee ⇄	1.2	36	AC100-240	90	350	0.65




Smart Curtain System
4A5



Advantage

- Support hotel card power supply/4A5 control mode
- Strong Current Control
- Automatic limit
- High torque
- Silent working
- Dry contact control
- Hand pull when power off
- Sync operation
- Hand pull start
- Five wire
- Remote control

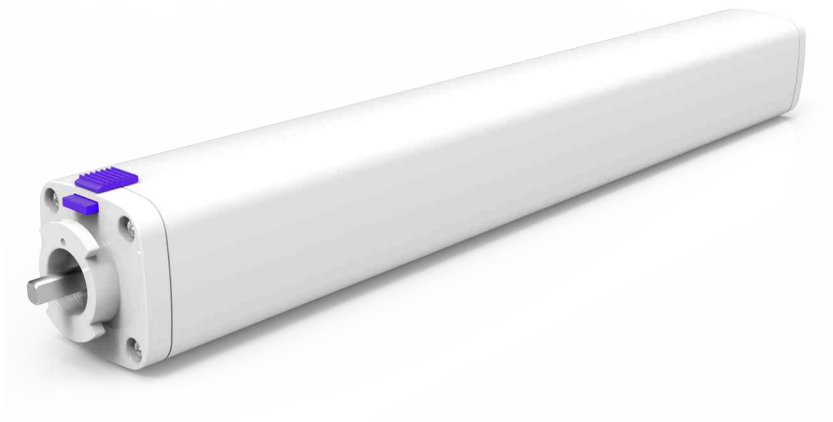

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30141	N21-4A5-12 Curtain Motor N	1.2	36	AC220/110	90	350	0.65




Smart Curtain System
485



Advantage


- Premium global RS-485 chipsets, guaranteed quality.
- RS-485 with Instant Bi-directional Feedback
- Remote control
- Silent working
- Sync operation
- High torque
- Hand pull start
- Hand pull when power off

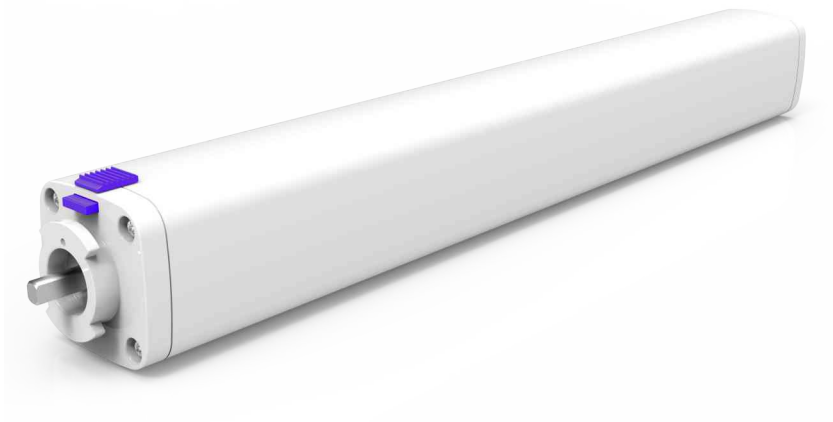

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30114	N21-3E-1.2 Curtain Motor 485	1.2	36	AC100-240	90	350	0.65




Smart Curtain System
WIFI



Advantage


- Silent Working
- Remote phone control
- High torque
- Smart speaker control
- Automatic limit
- Scene mode
- Sync operation
- Hand pull start
- Hand pull when power off
- Remote control

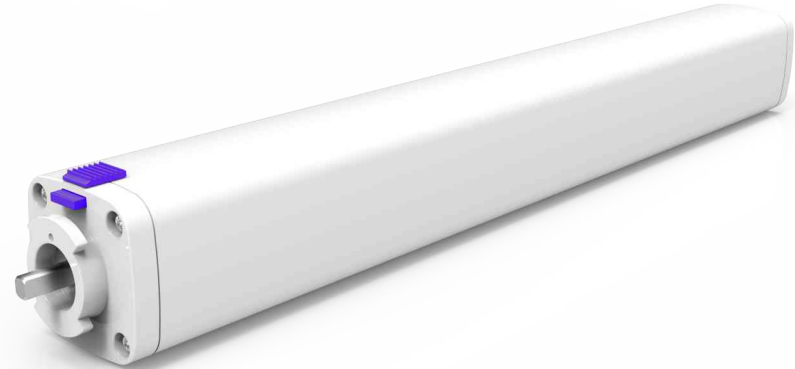

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30117	N21-3E-12 curtain motor-NMS Wi-Fi	1.2	36	AC100-240	90	350	0.65




Smart Curtain System
Lithium Battery



Compatible with slim solar panel

Advantage

- Support fast charging
- Type-C interface
- Support power bank
- Low power design
- Sync operation
- Remote control
- Silent working
- Hand pull when power off
- Hand pull start

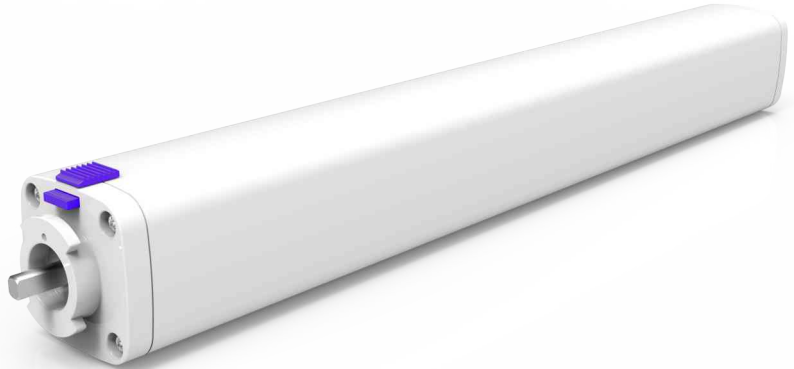

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30181	N21-4E-12 Curtain Motor -3350mA	1.2	22	5V-Type-C	90	280	0.65



Smart Curtain System-KNX



Advantage

- ⚙️ KNX bus control
- 🖨️ Connect to the central control management system
- ⚙️ International standard KNX chip
- 🔗 Built-in, no need external modules
- 🛡️ 5-year warranty
- 💻 Using ETS5 software



Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30138	N21-3E-1.2 curtain motor-KNX	1.2	36	AC100-240	90	350	0.65


N21 Curtain Motor Solution

Bearing Capacity Parameter Table Units: (Kg) Remark: Double  Single 
Here by we recommend the formula to calculate the fabric weight as follows: fabric weight=fabric weight Kg/ m² x fabric area covered m² x wrinkles rate.


1.2N, m single motor	Track style									
	Loading weight									
	Fabric length									
	4m	8m								
	12m									
	60	50	45	40	35	30	25	31	21	
	55	45	40	35	30	25	20	21	16	
	50	40	35	30	25	20	—	—	—	

Description: 1. The chart shows the maximum load bearing of 1.2N.m single motor with different track settings (length/opening way, etc.).
When calculating the maximum load bearing, the fabric wrinkle rate should also be taken into account.
2. In the chart, the maximum load bearing does not consider the friction between fabric and track or curtain box.

Interpretation of item

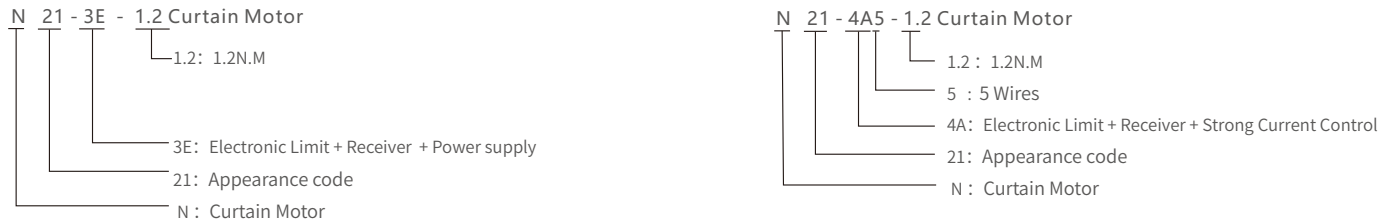

Product size chart (mm)

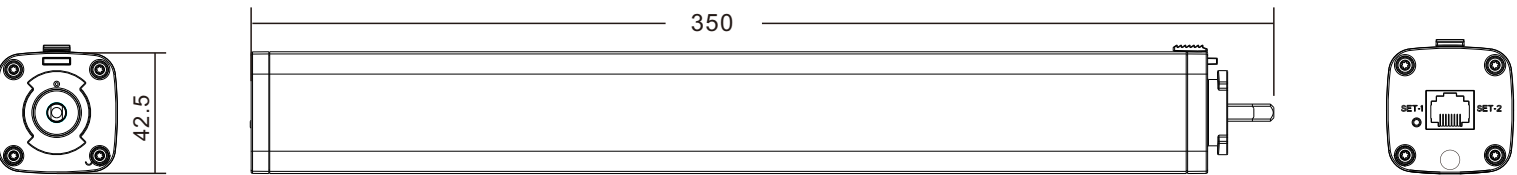

Three-wire wiring method




Five-wire wiring method




N21 Curtain Motor Solution

AC power switch installation wiring diagram  ① Strong current control distance more than 60m, the need for special custom.
② Zero line and Fire wire can not be reversed. If there is a spare line after wiring, please use pressure line cap to do well insulation.


AC power switch double button mode five-wire connection method:

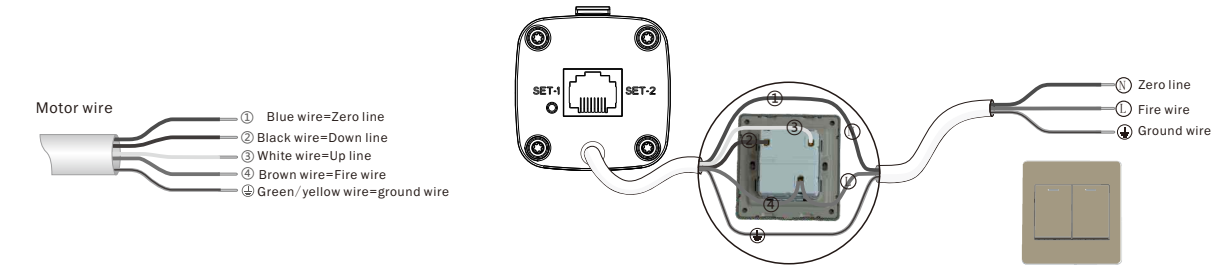


AC power switch double button mode four-wire connection method:

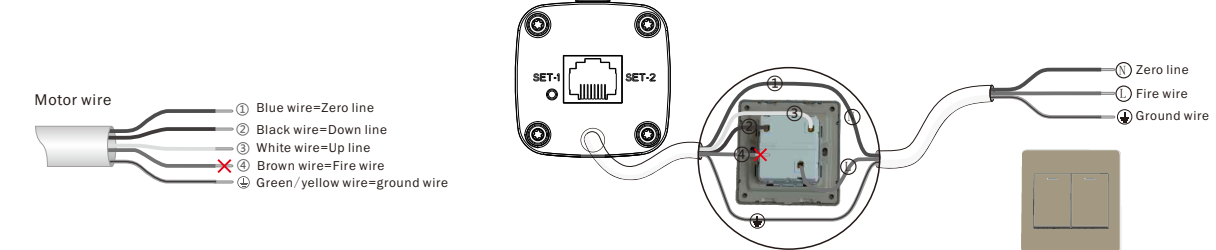


AC power switch hotel mode connection method:

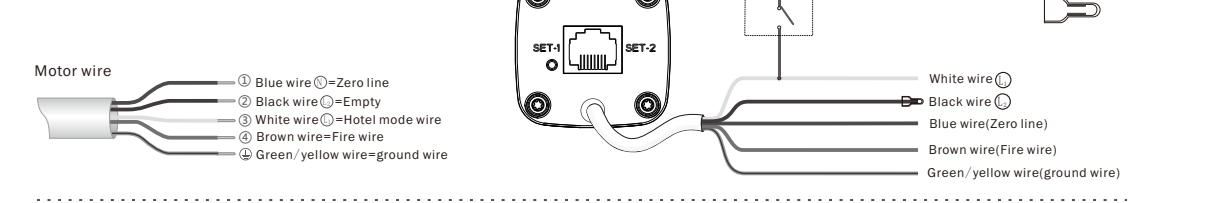

Three-wire conventional wiring method:

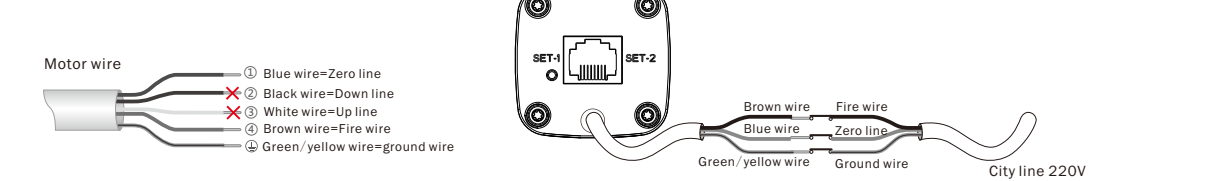


Eight-core network cable interface




Weak current switch mode selection

 The default is mode one; The working mode of the switch is passive dry contact mode

mode one:




mode two:






C10 High Quality Length Adjustable
EASY READY-MADE
Motorized Curtain


First Size	Second Size	Fabric load
1.67-3.0M	2.42-4.5M	50KG

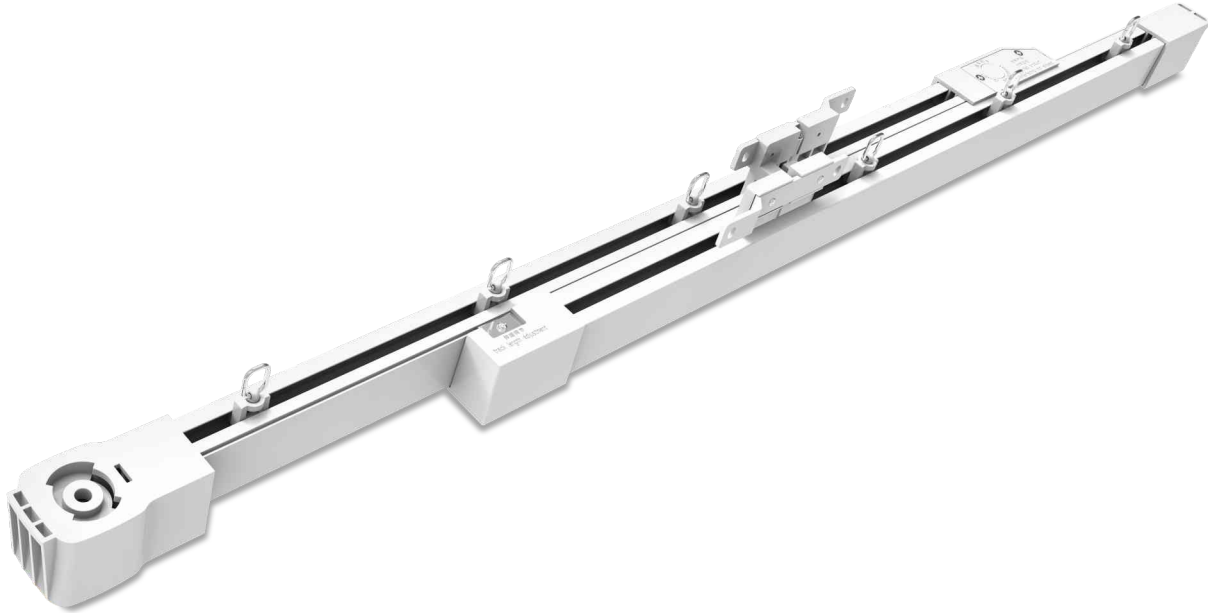


C10 High Quality Length Adjustable
EASY READY-MADE
Motorized Curtain

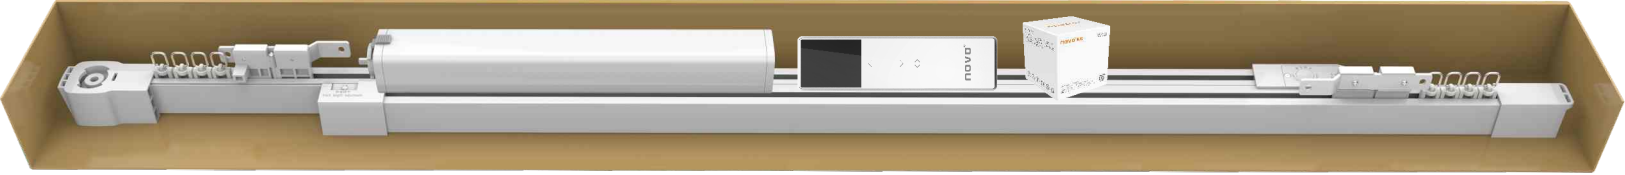

Product Introduction

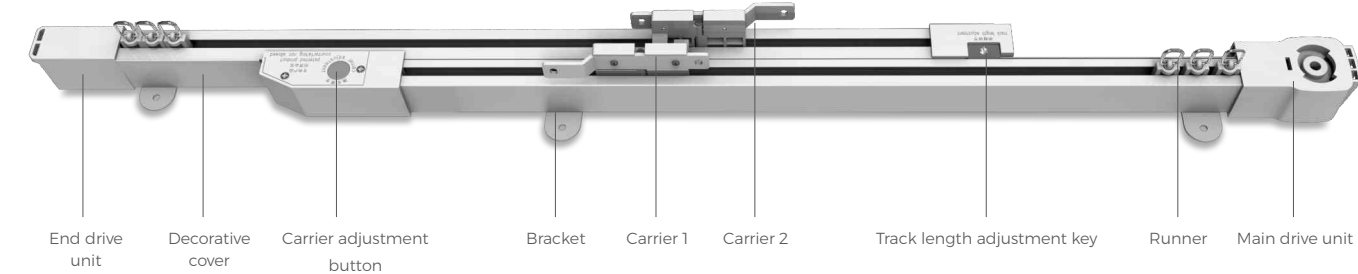

Packing Details

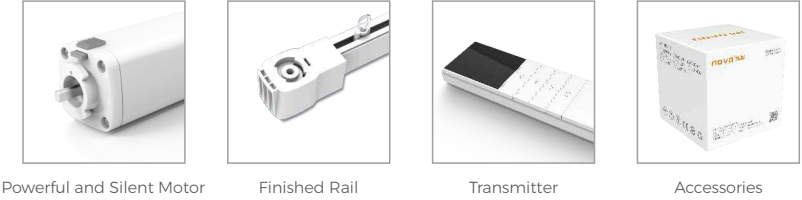

Powerful and Silent Motor Finished Rail Transmitter Accessories



Smart Curtain System

Advantage

- Low power design

Silent Working

Support fast charging

Support power bank

Type-C interface

High torque

Automatic limit

Sync operation

Home automation switch control

Dry contact control
- Support hotel card power supply/dry contact/485 control mode

Mobile phone control

Smart speaker control


Premium global RS-485 chipsets, guaranteed quality

Remote control

Scene mode

Hand pull when power off

Hand pull start

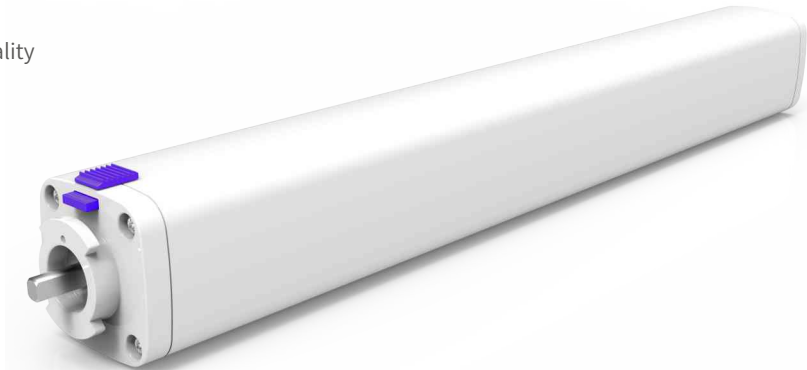

--	--	--	--	--





Smart Curtain System

Item NO	Item	Specification model
D40540	C10 length adjustable finished rail 0.92-1.5m	motor+rail+remote
D40541	C10 length adjustable finished rail 0.92-1.5m-Five wire	motor+rail+remote
D40545	C10 length adjustable finished rail 0.92-1.5m NTY ⇌	Wi-Fi motor+rail+remote
D40546	C10 length adjustable finished rail 0.92-1.5m-NTY-ZB ⇌	Zigbee motor+rail+remote
D40549	C10 length adjustable finished rail 0.92-1.5m 485 ⇌	485 motor+rail+remote
D40547	C10 length adjustable finished rail 0.92-1.5m-Battery	4E motor+rail+remote
D40550	C10 length adjustable finished rail 1.67-3.0m	motor+rail+remote
D40551	C10 length adjustable finished rail 1.67-3.0m-Five Wire	motor+rail+remote
D40555	C10 length adjustable finished rail 1.67-3.0m-NTY ⇌	Wi-Fi motor+rail+remote
D40556	C10 length adjustable finished rail 1.67-3.0m-NTY-ZB ⇌	Zigbee motor+rail+remote
D40559	C10 length adjustable finished rail 1.67-3.0m485 ⇌	485 motor+rail+remote
D40557	C10 length adjustable finished rail 1.67-3.0m-Battery	4E motor+rail+remote
D40560	C10 length adjustable finished rail 2.42-4.5m	motor+rail+remote
D40561	C10 length adjustable finished rail 2.42-4.5m-Five wire	motor+rail+remote
D40565	C10 length adjustable finished rail 2.42-4.5m-NTY ⇌	Wi-Fi motor+rail+remote
D40566	C10 length adjustable finished rail 2.42-4.5m-NTY-ZB ⇌	Zigbee motor+rail+remote
D40569	C10 length adjustable finished rail 2.42-4.5m 485 ⇌	485 motor+rail+remote
D40567	C10 length adjustable finished rail 2.42-4.5m-Battery	4E motor+rail+remote





Smart Curtain System

Advantage

- Main and ancillary motor
- Mobile phone control
- Mini Motor
- Smart speaker control
- High torque
- Scene mode
- Silent working
- Hand pull when power off
- Sync operation
- Hand pull start
- Remote control



Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30200	N23-3E-1.2 main and ancillary curtain motor-NTS Bluetooth ⇄	1.2	36	AC100-240	90	193	0.53
N30201	N23-3E-1.2 main and ancillary curtain motor-NMS Bluetooth ⇄	1.2	36	AC100-240	90	193	0.53





Smart Curtain System

485



Advantage

- Automatic Limit485/232 Control
- Sync operationStrong Current Control
- Adjustable speedSupport different dry contact ways
- Soft start and Soft stopHand pull when power off
- Up or Down installationHand pull start
- 3 wires or 5 wires inputRemote control



Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Speed (cm/s)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30090	N17-4A5-2 curtain motor (485 port)⇄	2	48	AC220	10-20	80-120	320	1.14
N30091	N17-4A5-2 curtain motor	2	48	AC220	10-20	80-120	320	1.14




Smart Curtain System

NTY/4A5



Advantage

- Automatic LimitWiFi Control
- Sync operationStrong Current Control
- Adjustable speedSupport different dry contact ways
- Soft start and Soft stopHand pull when power off
- Up or Down installationHand pull start
- 3 wires or 5 wires inputRemote control

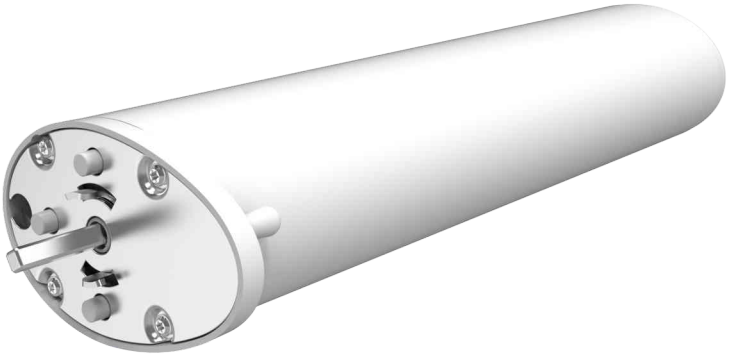

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Speed (cm/s)	Rated revolution (rpm)	Motor length (mm)	Motor weight (kg)
N30045	N18-4A5-2 curtain motor (NTY by order)⇄	2	48	AC110/AC220	10-20	80-120	308	0.86
N30047	N18-3E-2 curtain motor-NTY ⇄	2	48	AC100-240	10-20	80-120	298	0.82



Ambient Light Dream/vertical Blinds Solutions

NOVO ambient light dream/vertical blinds is more beautiful! A masterpiece that perfectly combines innovation and art, the sense of atmosphere and warmth are immediately full, creating a dreamlike and charming atmosphere for your home and life, and falling in love with going home!



LED Right Vertical Blinds Motor System


Advantage

- Integrated 2-in-1 Motor & LED Driver
- Glowing track
- Input 100-240V
- Curve track
- Horizontal hidden motor
- Silent working
- Seamless two-way RS485 connection
- Adopt high temperature resistant materials
- Mobile phone control
- Remote control





LED Right Vertical Blinds
Motor System-Wifi

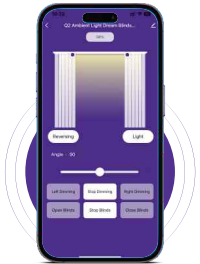

Advantage

- Built-in LED and driver
- Remote control
- Glowing track
- Mobile phone control
- Input 100-240V
- Adopt high temperature resistant materials
- Horizontal hidden motor



Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
Q20107	Q2-3E-12 Vertical Blinds Motor-NTY ⇄	1.2	100	AC100-240	24	2.5	285	0.8



LED Right Vertical Blinds
Motor System-Bluetooth



Advantage

- Built-in LED and driver
- Horizontal hidden motor
- Glowing track
- Adopt high temperature resistant materials
- Input 100-240V
- Remote control



Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
Q20105	Q2-3E-12 Vertical Blinds Motor-NMS ⇄	1.2	100	AC100-240	24	2.5	285	0.8



LED Right Vertical Blinds
Motor System-485



Advantage

- Premium global RS-485 chipsets, guaranteed quality
- RS-485 with Instant Bi-directional Feedback
- Remote control
- Silent working



Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
Q20113	Q2-3E-12 Vertical Blinds Motor-485 ⇄	1.2	100	AC100-240	24	2.5	285	0.8



LED Right Vertical Blinds
Motor System

Advantage

- Built-in LED and driver
- Glowing track
- Input 100-240V
- Curve track
- Horizontal hidden motor
- Adopt high temperature resistant materials
- Remote control
- Silent working





Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	LED voltage (v)	LED ampere (A)	Motor length (mm)	Motor weight (kg)
Q20101	Q2-3E-12 Vertical Blinds Motor	1.2	100	AC100-240	24	2.5	285	0.8



Vertical/Dream Blinds
Motor System


Advantage

- ⚡ Low power design
- 🔊 Silent working
- 🔌 Support fast charging
- 🔋 Support power bank
- 🔌 Type-C interface
- 📶 485 control mode
- 📱 Mobile Phone control
- 🔊 Smart speaker control
- 🎛️ Scene Mode
- 🕒 Remote control

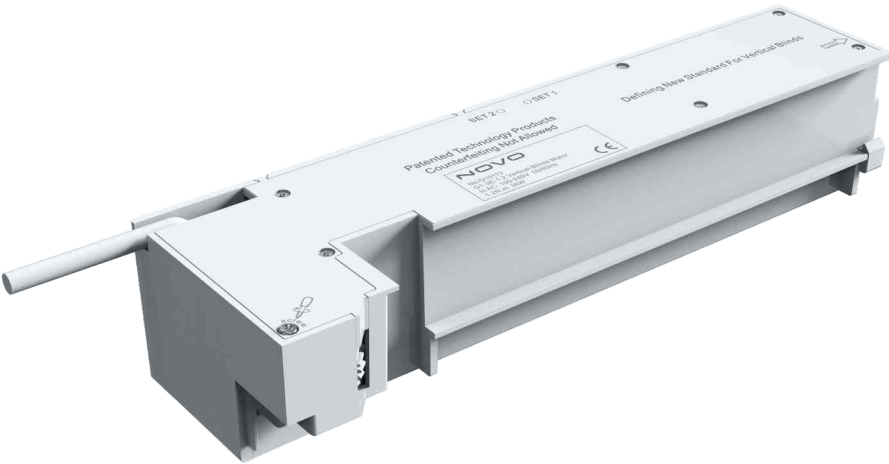



Vertical/Dream Blinds
Motor System-NTY



Advantage

- ⌂

High torque
- 📶

Remote control
- 🔇

Silent Working
- 📱

Mobile phone control
- 🔌

Scene mode
- 🔊


Smart speaker control



Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
Q10107	Q1-3E-12 Vertical Blinds Motor-NTY ⇌	1.2	36	AC100-240	272	0.74
Q10147	Q1-3E-13 Vertical Blinds Motor-NTY ⇌	1.3	36	AC100-240	272	0.74
Q10148	Q1-3E-13 Vertical Blinds Motor-NTY Zigbee ⇌	1.3	36	AC100-240	272	0.74
Q10101	Q1-3E-12 Vertical Blinds Motor	1.2	36	AC100-240	272	0.74
Q10141	Q1-3E-13 Vertical Blinds Motor	1.3	36	AC100-240	272	0.74



Vertical/Dream Blinds
Motor System-lithium Battery



Compatible with slim solar panel

Advantage

- 🔌

Type-C interface
- 🔋


Remote control
- ⚡

Support fast charging
- ⚡

Low power design
- 🔌

Support power bank
- 🔇


Silent working

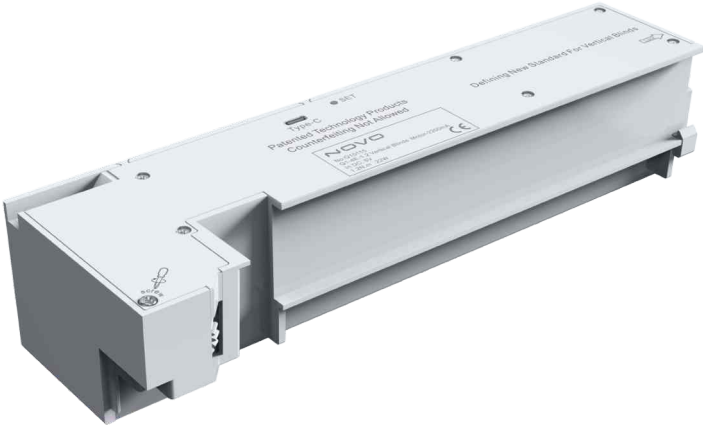

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
Q10115	Q1-4E-1.2 Vertical Blinds Motor-2200mAh	1.2	22	DC 5V	272	0.79



Vertical/Dream Blinds
Motor System-Wifi



Advantage

- Mobile Phone control
- Remote control
- Smart speaker control
- Silent Working
- High torque
- Scene mode



Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
Q10105	Q1-3E-12 Vertical Blinds Motor-NMS ⇄	1.2	36	AC100-240	272	0.74
Q10145	Q1-3E-13 Vertical Blinds Motor-NMS ⇄	1.3	36	AC100-240	272	0.74




Vertical/Dream Blinds
Motor System-485



Advantage

- Premium global RS-485 chipsets, guaranteed quality
- RS-485 with Instant Bi-directional Feedback
- Remote control
- Silent working

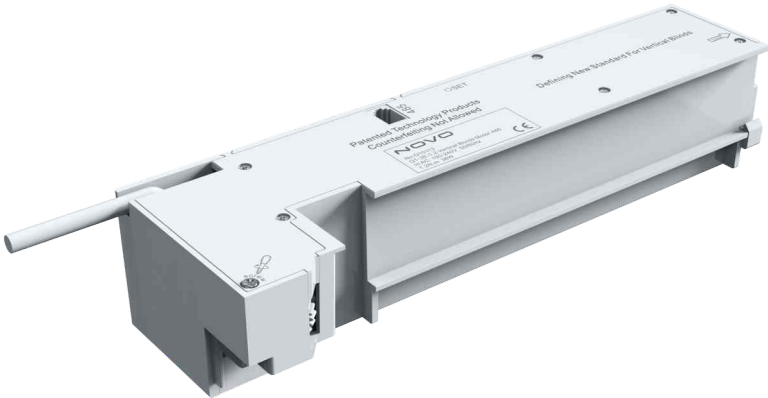

Item NO	Item	Torque (N.m)	Power (w)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
Q10113	Q1-3E-12 Vertical Blinds Motor-485	1.2	36	AC100-240	272	0.74



Vertical/Dream Blinds Motor System




Flexible and convenient track fixing bracket, installable at any position, eliminating the hassle of traditional hex lock rings.



Max dimming angle can be 170 degrees or 130 degrees according to different positions. It can avoid runners distorting and damaging in any position.





Hook in drive unit

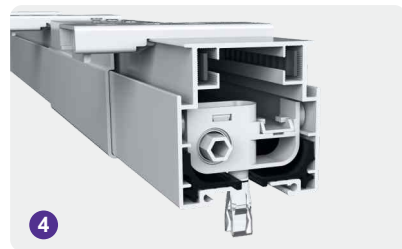


A 7mm-wide sound-absorbing strip is inserted into the track. Perfect combination of an enlarged 7.5mm hexagonal drive rod and patented runners can save extra accessories like middle supports and extended carrier arms.




Vertical/Dream Blinds Motor System Solution 1 [Seamless jointing]

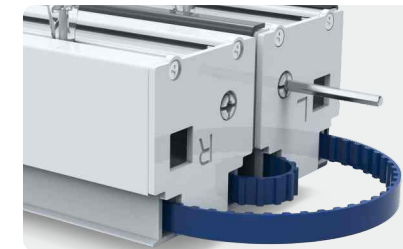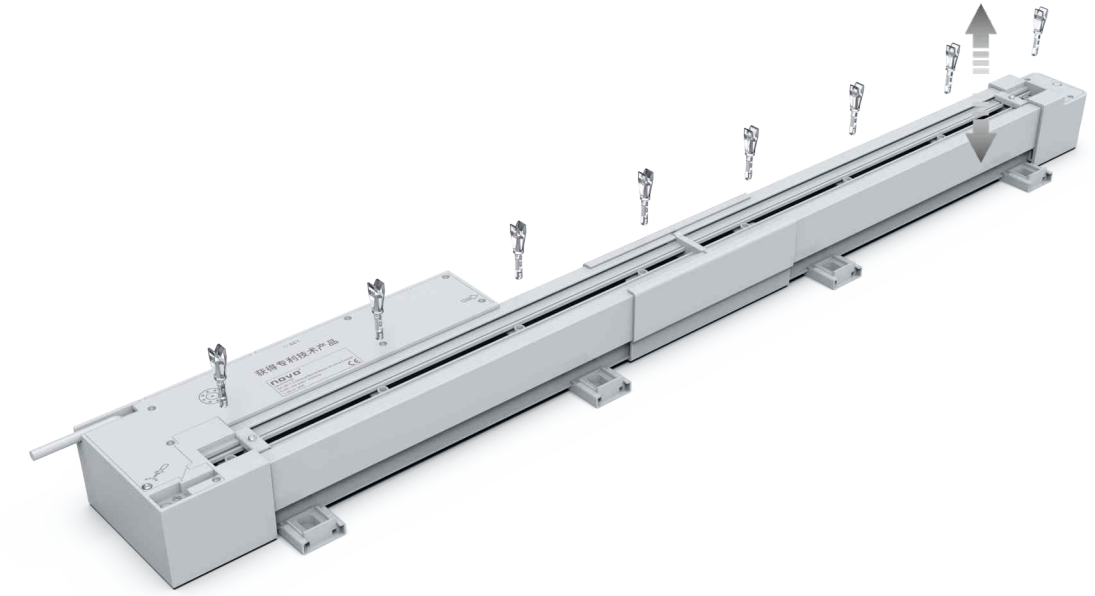

Use the Joint seal divides the double-opening track into two independent units, pre-fixing all components including drive rod, runners, carriers, belts and tracks etc. Then packed separately for easy on-site assembly, user-friendly even for novice installers, unlike complex traditional splicing structures.

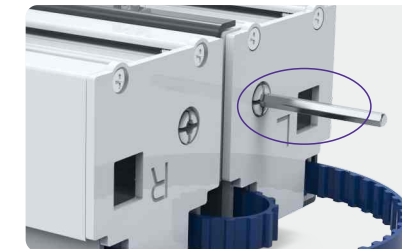

The connection of hollow hexagonal drive rod is internal to minimize the gap. Unlike the traditional cross drive rod can only be spliced externally, resulting in a particularly large closing gap that requires additional auxiliary accessories to solve it.

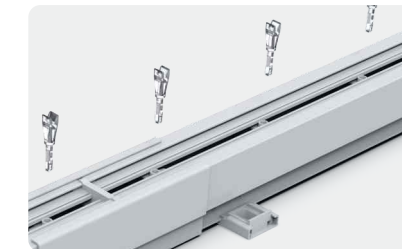

The hook is free to separate from the runner to avoid crushing of the finished track during transportation. Insert the hooks when installing on site.




The effect after the hook and runner are separated




Vertical/Dream Blinds Motor System–Solution 2 [Gear connection]

Q1 dream blinds double open track gear connection
schematic diagram

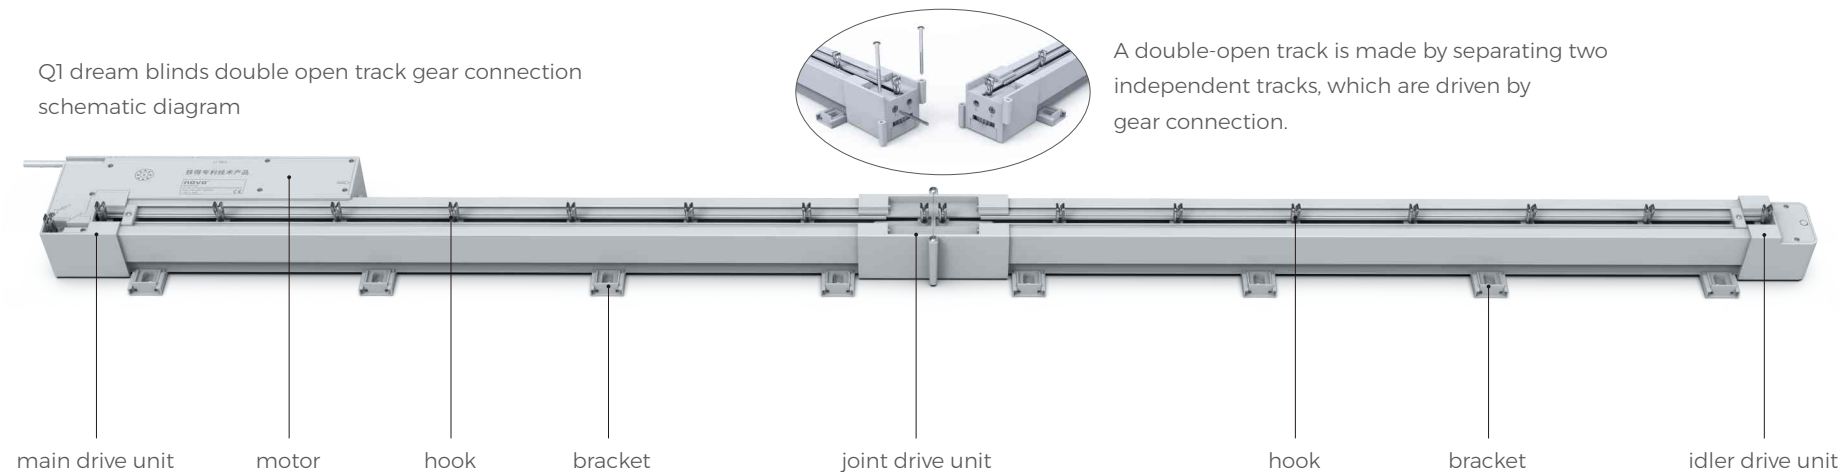


A double-open track is made by separating two independent tracks, which are driven by gear connection.

Q1 dream blinds seamless connecting single open track
schematic diagram

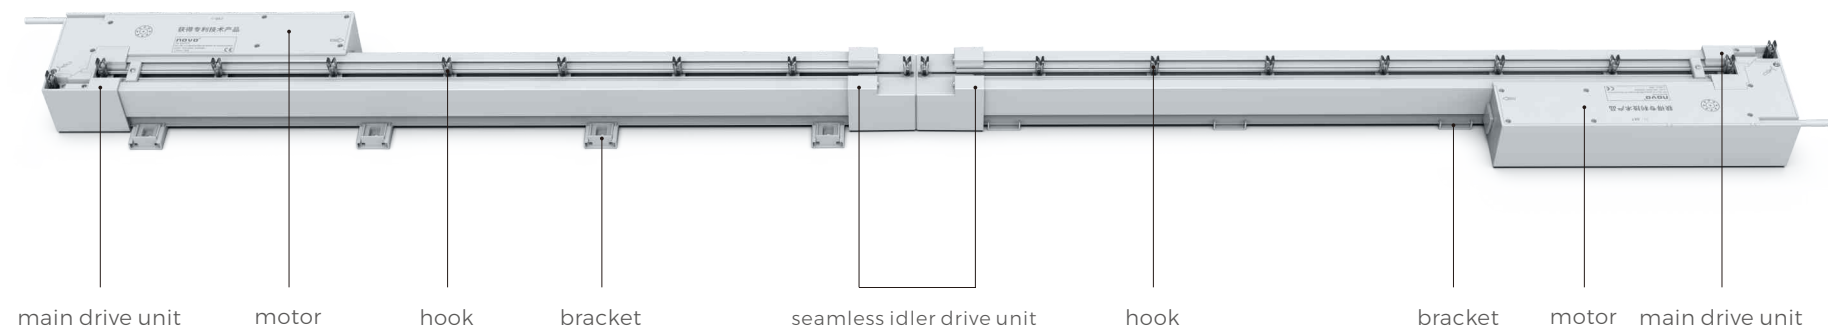

Vertical/Dream Blinds Motor System–Solution 3 [Cardan connecting for L & U shape]

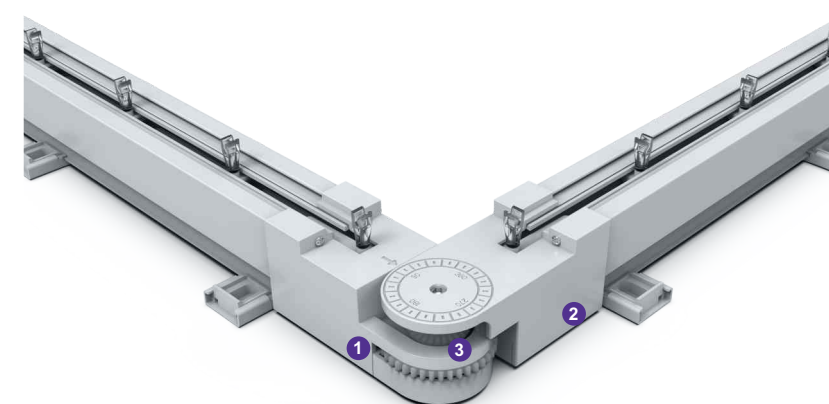

Any angle from 90 to 270 degrees can solve industry problems



1 The transmission of dimming and opening & closing all adopts the unique technology of gear meshing transmission to solve the difficulties in the industry.

2 The built-in clutch device makes it possible to run even if the corners on both sides are not equal


3 Independently packaged separately, you can pack whatever you want

4 Dismantle and assemble anytime and anywhere to solve the pain points of transportation and installation

- Innovative design, patented technology products.
- The transmission of dimming and opening and closing all adopts the unique technology of gear meshing transmission to solve the difficulties in the industry.
- The original clutch design allows opening and closing when the lengths of the tracks on both sides are different.
- Easy assembly, no need professional level.
- Independent and separate packaging solves concerns such as transportation crushing.
- Solve all special-shaped windows, from 90-270 degree windows or L-shaped U-shaped windows, etc., especially there is no special requirement for blinds boxes.


Q1 dream blinds cardan connecting double open
track-L shape schematic diagram

Install motor on long track
long track drives short track
Main unit drives clutch unit

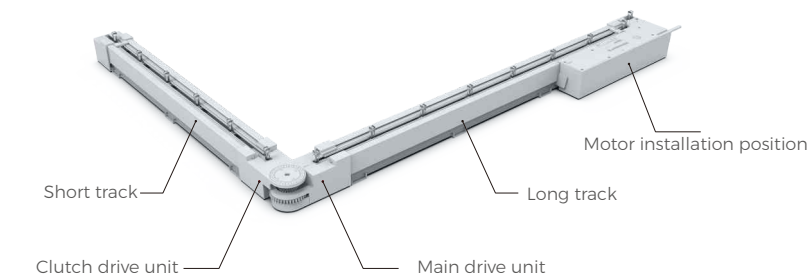

Q1 dream blinds cardan connecting double open
track-U shape schematic diagram

Install motor on long track
long track drives short track
Main unit drives clutch unit

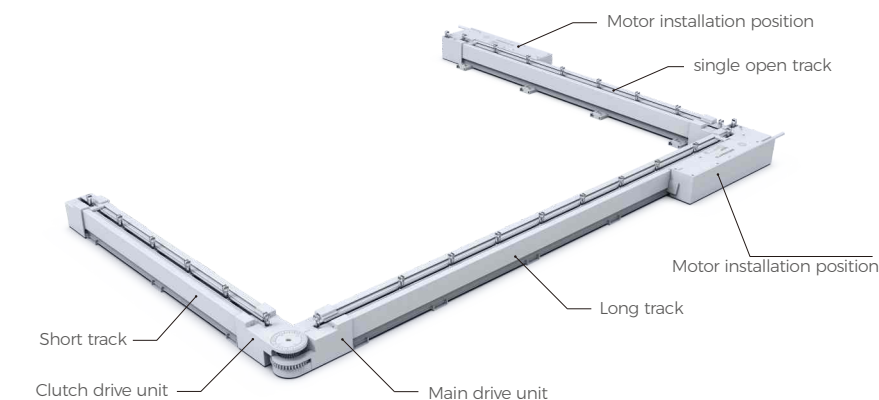

Tubular Motor Solutions



The electric roller blind is composed of a tubular motor, sunshade fabric and other accessories (such as tubes, etc.). The motor drives the tube to raise or lower the fabric, thereby realizing an electric intelligent sunshade system.

The electric roller blinds are installed indoors to avoid the adverse effects of the external environment and increase the life of the system. They can block sunlight and reduce the air-conditioning load in summer and improve visual comfort in winter.

The motor has low noise, simple and convenient limit adjustment, and accurate and reliable limit control. It can stop at any position in the middle. There are many control options, including radio remote control (single control, group control, and master control functions) and wall wired switch control. Easy to operate and works quietly and smoothly.



Tubular Motor System



Alexa, open A;
Alexa, close A;
Alexa, set the A to 30%;
Alexa, increase A by 20%;
Alexa, decrease A by 10%;




OK google, open A;
OK google, close A;
OK google, stop A




Advantage

- Antistatic design
- Silent Working
- High-precision gearbox design
- Built-in patented mechanical brake system, stronger load-bearing capacity, no slipping when overloaded
- Adopting plum output shaft structure design,no slip
- Power supply, electronic limit, receiver integrated design
- Support fast charging
- Eletronic Limit third limit
- Type-C interface
- Support power bank
- Stall Protection
- Dry contact control
- Remote control
- Sync operation





22mm Tubular Motor



Alexa, open A;
Alexa, close A;
Alexa, set the A to 30%;
Alexa, increase A by 20%;
Alexa, decrease A by 10%;



OK google, open A;
OK google, close A;
OK google, stop A



Advantage

- High-precision gearbox design
- Smart speaker control
- Silent Working
- Mobile phone control
- Built-in brake system
- Remote control
- Antistatic design
- Sync operation
- Eletronic Limit third limit
- Fit for Ø30–32mm manual roller tube

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection grade (IP)
D11001	K22-4E-11-30 tubular motor 30	1.1	30	10	DC5	440	IP44
D11003	K22-4E-11-30 tubular motor 30-NTY Bluetooth⇐⇒	1.1	30	10	DC5	440	IP44
D11006	K22-4E-11-30 tubular motor 30-Matter ⇐⇒	1.1	30	10	DC5	440	IP44
D11031	K22-4E-11-30 tubular motor 32	1.1	30	10	DC5	440	IP44
D11033	K22-4E-11-30 tubular motor 32-NTY Bluetooth⇐⇒	1.1	30	10	DC5	440	IP44
D11036	K22-4E-11-30 tubular motor 32-Matter ⇐⇒	1.1	30	10	DC5	440	IP44





25mm Tubular Motor
NTY




Alexa, open A;
Alexa, close A;
Alexa, set the A to 30%;
Alexa, increase A by 20%;
Alexa, decrease A by 10%;



OK google, open A;
OK google, close A;
OK google, stop A

Advantage


- High-precision gearbox design
- Silent Working
- Built-in brake system
- Adjustable speed
- Antistatic design
- Smart speaker control
- Mobile phone control
- Remote control
- Sync operation
- Eletronic Limit third limit

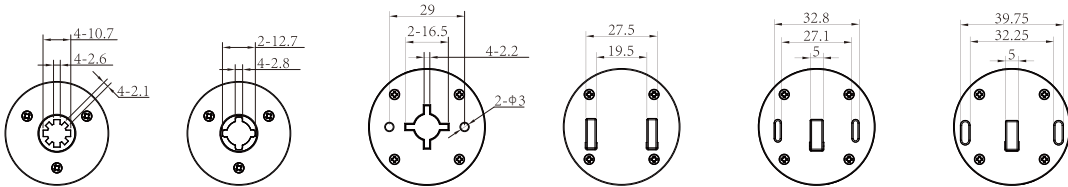

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection grade (IP)
D10485	K25-3E-1.6-30 Tubular Motor-NTY ⇌	1.6	30-38	19	AC100-240	447	IP44
D10481	K25-3E-1.6-30 Tubular Motor II	1.6	30-38	19	AC100-240	420	IP44






25mm Tubular Motor
-IB

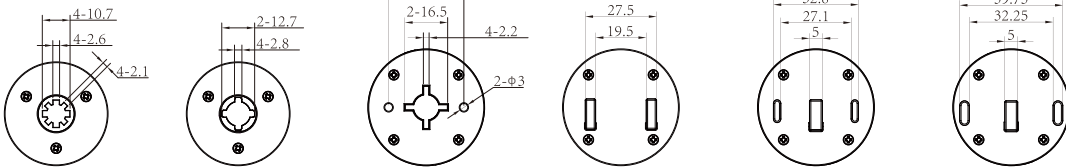

Advantage

- Built-in brake system
- Adjustable speed
- Antistatic design
- Sync operation
- Electronic Limit third limit
- High-precision gearbox design
- Silent Working
- Dry contact control
- Remote control

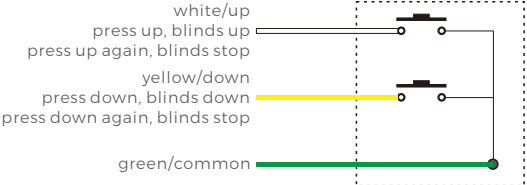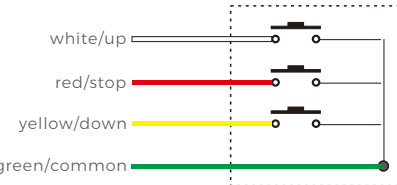

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection grade (IP)
D10482	K25-3E-1.6-30 Tubular Motor IB- II	1.6	30-38	19	AC100-240	420	IP44




25mm Tubular Motor
485



Advantage


- Premium global RS-485 chipsets, guaranteed quality
- RS-485 with Instant Bi-directional Feedback
- High-precision gearbox design
- Silent Working
- Adjustable speed
- Built-in brake system
- Antistatic design

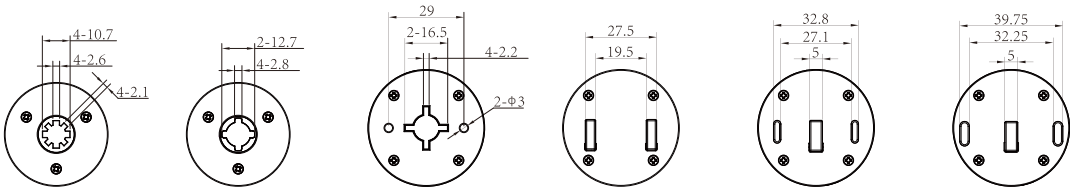

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection grade (IP)
D10483	K25-3E-1.6-30 Tubular motor II -485	1.6	30-38	19	AC100-240	420	IP44




25mm Tubular Motor
Lithium Battery



Compatible with slim solar panel

Advantage

- Built-in battery
- Type-C interface
- Support power bank
- High-precision gearbox design
- Adjustable speed
- Silent Working
- Antistatic design
- Remote control
- Low battery protection
- Sync operation
- Eletronic Limit third limit

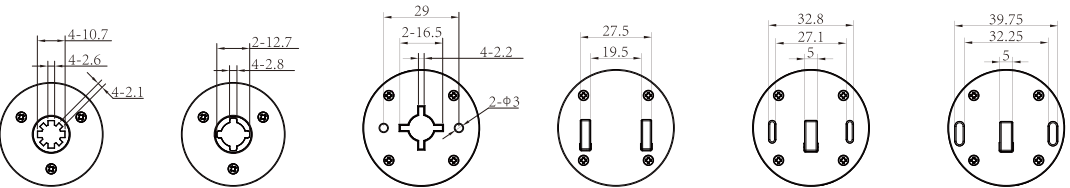

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection grade (IP)
D10493	K25-4E-1.6-30 Tubular Motor II	1.6	30	16	DC5	420	IP44
D10494	K25-4E-1.6-30 Tubular Motor II -3350mAh	1.6	30	16	DC5	420	IP44


25mm Tubular Motor Lithium Battery
NTY Zigbee/NTY Bluetooth




- Smart speaker control
- Mobile phone control
- Remote control
- Adjustable speed
- Low battery protection
- Type-C interface
- High-precision gearbox design
- Silent Working
- Built-in battery
- Antistatic design
- Sync operation
- Electronic Limit third limit



25mm Tubular Motor Lithium Battery
Matter



- Smart speaker control
- Mobile phone control
- Remote control
- Adjustable speed
- Low battery protection
- Type-C interface
- High-precision gearbox design
- Silent Working
- Built-in battery
- Antistatic design
- Sync operation
- Electronic Limit third limit

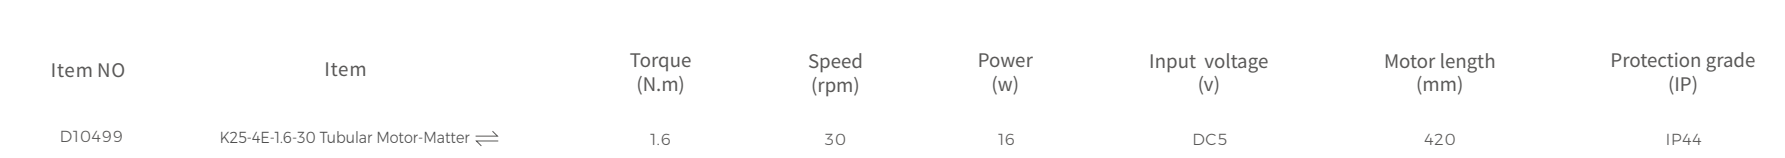



25mm Tubular Motor
Hand Shank




Advantage

- High-precision gearbox design
- Built-in battery
- Adjustable speed
- Antistatic design
- Support power bank
- Silent Working
- Manual wand control
- Built-in brake system
- Type-C interface
- Sync operation
- Low power design



Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection grade (IP)
D10495	K25-4E-1.6-30 Tubular Motor II - Hand Shank	1.6	30	16	DC5	420	IP44

Interpretation of item

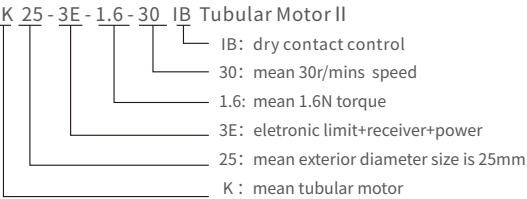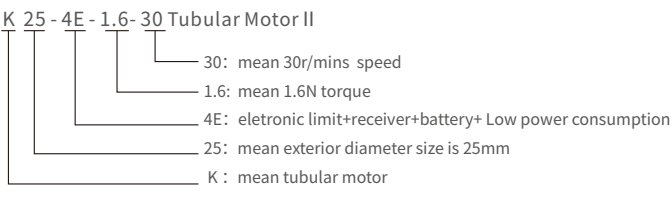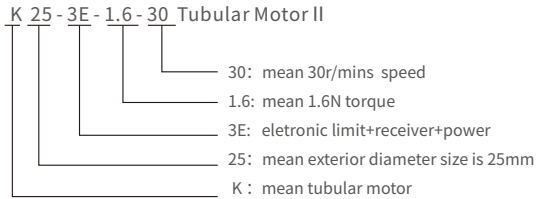



DC Tubular Motor

Advantage

- ⚡ 100-240V global voltage compatibility
- 🔋 DC motor drive says goodbye to overheat protection
- 🔇 Quieter than traditional AC motors
- 🔄 Supports multi-speed adjustment and sync operation
- 🔌 Embedded intelligent modules bid farewell to external attachments
- ⚙️ Precise Limit Setting
- 📶 Remote control



Remote control



35mm Tubular Motor




Remote control

Advantage

- ⚡ 100-240V global voltage compatibility
- 🔌 DC motor drive says goodbye to overheat protection
- 🔊 Quieter than traditional AC motors
- ⚙️ Supports multi-speed adjustment and sync operation
- 🏠 Built-in smart modules-no external parts required

Interpretation of item

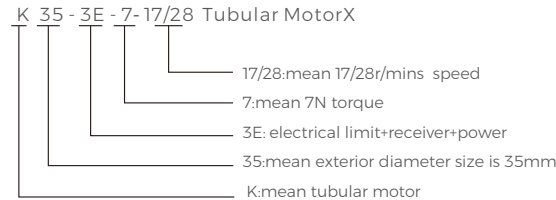

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10201	K35-3E-7-17/28 Tubular Motor X	7	17/28	60	AC100-240	490	IP44
D10211	K35-3E-10-17/20 Tubular Motor X	10	17/20	60	AC100-240	490	IP44




35mm Tubular Motor



Advantage

- ⚡ 100-240V global voltage compatibility
- 🔌 DC motor drive says goodbye to overheat protection
- 🔊 Quieter than traditional AC motors
- ⚙️ Supports multi-speed adjustment and sync operation
- 🏠 The embedded Mijia APP smart module says goodbye to add-ons

Interpretation of item

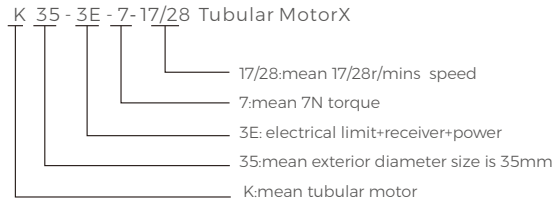

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10203	K35-3E-7-17/28 Tubular Motor X-NMS	7	17/28	60	AC100-240	490	IP44
D10213	K35-3E-10-17/20 Tubular Motor X-NMS	10	17/20	60	AC100-240	490	IP44




35mm Tubular Motor



Advantage

- ⚡ 100-240V global voltage compatibility
- 🔌 DC motor drive says goodbye to overheat protection
- 🔊 Quieter than traditional AC motors
- ⚙️ Supports multi-speed adjustment and sync operation
- 🔧 Built-in smart modules-no external parts required

Interpretation of item

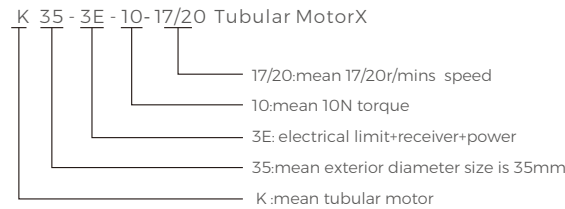

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10205	K35-3E-7-17/28 Tubular Motor X-NTY	7	17/28	60	AC100-240	490	IP44
D10215	K35-3E-10-17/20 Tubular Motor X-NTY	10	17/20	60	AC100-240	490	IP44




35mm Tubular Motor



Advantage

- ⚡ 100-240V global voltage compatibility
- 🔌 DC motor drive says goodbye to overheat protection
- 🔊 Quieter than traditional AC motors
- ⚙️ Supports multi-speed adjustment and sync operation
- 🔧 The embedded Matter smart module says goodbye to add-ons

Interpretation of item

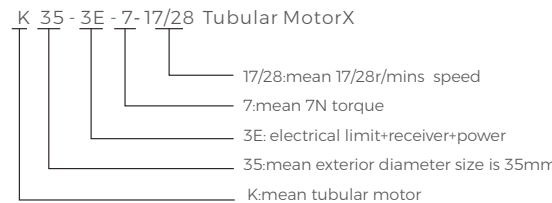

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10207	K35-3E-7-17/28 Tubular Motor X-Matter	7	17/28	60	AC100-240	490	IP44
D10217	K35-3E-10-17/20 Tubular Motor X-Matter	10	17/20	60	AC100-240	490	IP44

K35

NOVO


35mm Tubular Motor



Advantage

- Ⓜ Built-in high-capacity lithium battery
- Ⓜ Mainstream Type-C charging interface
- Ⓜ DC motor drive says goodbye to overheat protection
- Ⓜ Quieter than traditional AC motors
- Ⓜ Supports multi-speed adjustment and sync operation
- Ⓜ Built-in smart modules-no external parts required

Interpretation of item

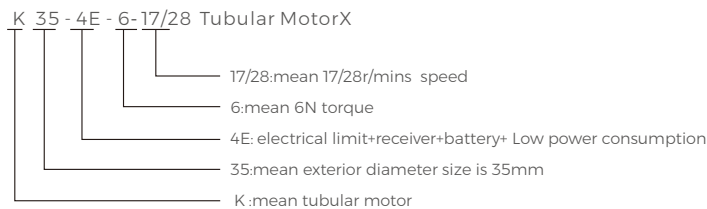

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10231	K35-4E-6-17/28 Tubular MotorX	6	17/28	46	5V TYPE-C	490	IP44
D10233	K35-4E-6-17/28 Tubular MotorX-NMS	6	17/28	46	5V TYPE-C	490	IP44
D10235	K35-4E-6-17/28 Tubular MotorX-NTY	6	17/28	46	5V TYPE-C	490	IP44
D10237	K35-4E-6-17/28 Tubular MotorX-Matter	6	17/28	46	5V TYPE-C	490	IP44

K35

NOVO


35mm Tubular Motor



Advantage

- Ⓜ Built-in high-capacity lithium battery
- Ⓜ Mainstream Type-C charging interface
- Ⓜ DC motor drive says goodbye to overheat protection
- Ⓜ Quieter than traditional AC motors
- Ⓜ Supports multi-speed adjustment and sync operation
- Ⓜ Embedded intelligent modules say goodbye to external attachment

Interpretation of item

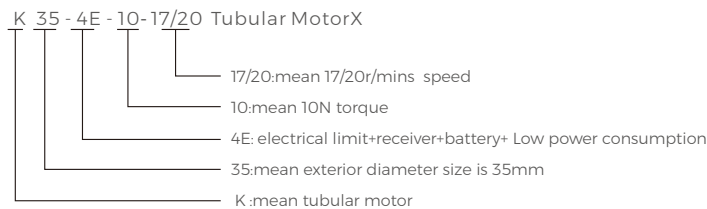

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10251	K35-4E-10-17/20 Tubular MotorX	10	17/20	46	5V TYPE-C	490	IP44
D10253	K35-4E-10-17/20 Tubular MotorX-NMS	10	17/20	46	5V TYPE-C	490	IP44
D10255	K35-4E-10-17/20 Tubular MotorX-NTY	10	17/20	46	5V TYPE-C	490	IP44
D10257	K35-4E-10-17/20 Tubular MotorX-Matter	10	17/20	46	5V TYPE-C	490	IP44



35mm Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor



IP65



Alexa, open A;
Alexa, close A;
Alexa, set the A to 30%;
Alexa, increase A by 20%;
Alexa, decrease A by 10%;




OK google, open A;
OK google, close A;
OK google, stop A



Advantage

- Precise Limit Setting
- Electronic Limit third limit
- Smart speaker control
- Stall Protection
- Helical gear silent gearbox
- Mobile phone control
- Gently lifts blinds up
- Adopting plum output shaft structure design, no slip
- Remote control
- Downward fabric finishing
- Enhanced copper heat sink design

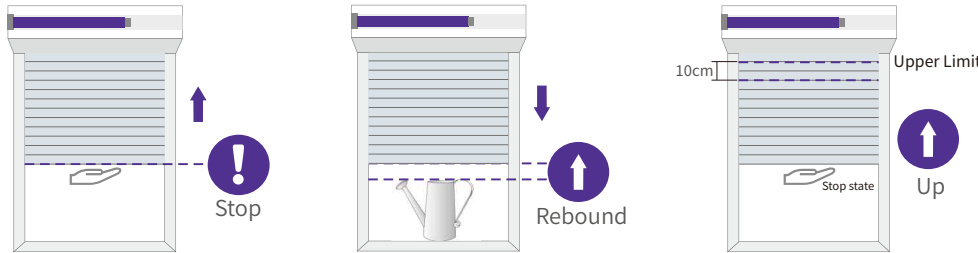

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Length (mm)
D10432	K35-ELR-6-28 tubular motor X-NTY ⇄	6	28	115	AC220	50/60	≤45	IP65	625
D10435	K35-ELR-10-17 tubular motor X-NTY ⇄	10	17	115	AC220	50/60	≤45	IP65	625




35mm Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor



IP65



Alexa, open A;
Alexa, close A;
Alexa, set the A to 30%;
Alexa, increase A by 20%;
Alexa, decrease A by 10%;




OK google, open A;
OK google, close A;
OK google, stop A



Advantage

- Precise Limit Setting
- Electronic Limit third limit
- Smart speaker control
- Stall Protection
- Helical gear silent gearbox
- Mobile phone control
- Gently lifts blinds up
- Adopting plum output shaft structure design, no slip
- Remote control
- Downward fabric finishing
- Enhanced copper heat sink design

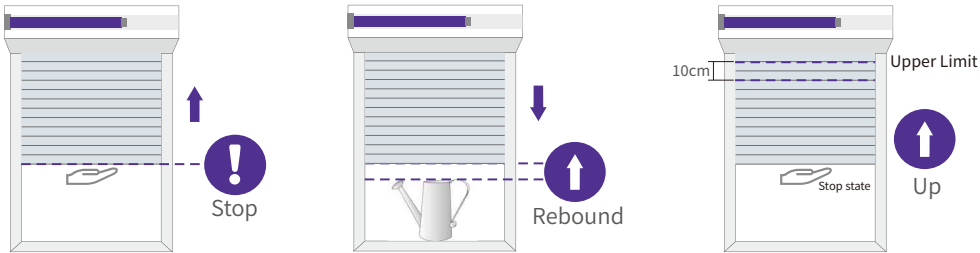


Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Length (mm)
D10431	K35-ELR-6-28 tubular motor X-NMS ⇄	6	28	115	AC220	50/60	≤45	IP65	625
D10434	K35-ELR-10-17 tubular motor X-NMS ⇄	10	17	115	AC220	50/60	≤45	IP65	625




35mm Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor



Advantage

- Precise Limit Setting
 - Stall Protection
 - Gently lifts blinds up
 - Downward fabric finishing
- Eletronic Limit third limit
 - Helical gear silent gearbox
 - Adopting plum output shaft structure design,no slip
 - Enhanced copper heat sink design
- Remote control
 - Premium global RS-485 chipsets, guaranteed quality
 - RS-485 with Instant Bi-directional Feedback

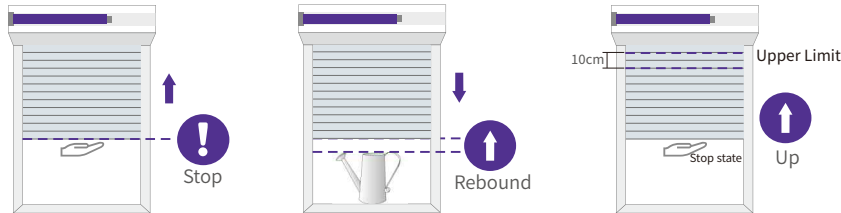

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Length (mm)
D10328	K35-ELR-10-17 tubular motor X-485 ⇄	10	17	115	AC220	50/60	≤45	IP45	625



35mm Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor




Remote control

IP65

Advantage

- Precise Limit Setting
 - Stall Protection
 - Gently lifts blinds up
 - Downward fabric finishing
- Eletronic Limit third limit
 - Helical gear silent gearbox
 - Adopting plum output shaft structure design,no slip
 - Enhanced copper heat sink design
- Remote control

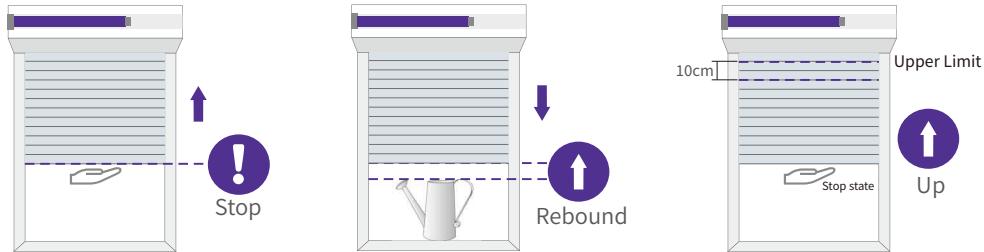

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Length (mm)
D10430	K35-ELR-6-28 tubular motor X	6	28	115	AC220	50/60	≤45	IP65	625
D10433	K35-ELR-10-17 tubular motor X	10	17	115	AC220	50/60	≤45	IP65	625



35mm Tubular Motor
NTY



Alexa, open A;
Alexa, close A;
Alexa, set the A to 30%;
Alexa, increase A by 20%;
Alexa, decrease A by 10%;



OK google, open A;
OK google, close A;
OK google, stop A



Advantage

- Helical gear silent gearbox
- Adopting plum output shaft structure design,no slip
- Enhanced copper heat sink design
- Built-in brake System
- Smart speaker control
- Mobile phone control
- Remote control
- Eletronic Limit third limit

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Motor length (mm)	Protection grade (IP)
D10308	K35-EL-6-28 Tubular Motor X-NTY ⇄	6	28	115	AC220	50/60	31.2	573	IP44
D10309	K35-EL-10-17 Tubular Motor X-NTY ⇄	10	17	115	AC220	50/60	31.2	573	IP44
D10375	K35-EL-6-28 Tubular Motor X-NTY ⇄	6	28	115	AC110	60	31.2	573	IP44
D10376	K35-EL-10-17 Tubular Motor X-NTY ⇄	10	17	115	AC110	60	31.2	573	IP44






35mm Tubular Motor
-IB



Advantage

- Adopting plum output shaft structure design,no slip
- Enhanced copper heat sink design
- Built-in brake systeml
- Helical gear silent gearbox
- Remote control
- Dry contact control

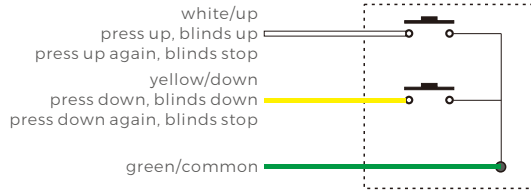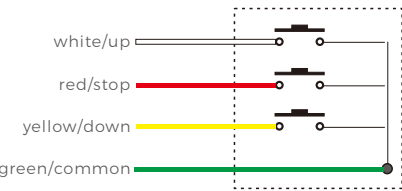

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Motor length (mm)	Protection grade (IP)
D10337	K35-EL-6-28 Tubular Motor X(IB)	6	28	115	AC220	50/60	31.2	515	IP44
D10338	K35-EL-10-17 Tubular Motor X(IB)	10	17	115	AC220	50/60	31.2	515	IP44



35mm Tubular Motor



Advantage

- Helical gear silent gearbox
 - Adopting plum output shaft structure design,no slip
 - Enhanced copper heat sink design
 - Built-in brake systemI
- Smart speaker control
 - Mobile phone control
 - Remote control
 - Eletronic Limit third limit

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Motor length (mm)	Protection grade (IP)
D10307	K35-EL-10-17 Tubular Motor X-NMS ⇄	10	17	115	AC220	50/60	31.2	573	IP44
D10122	K35-EL-6-28 Tubular Motor X	6	28	115	AC220	50/60	31.2	515	IP44
D10123	K35-EL-10-17 Tubular Motor X	10	17	115	AC220	50/60	31.2	515	IP44
D10373	K35-EL-6-28 Tubular Motor x	6	28	115	AC110	60	31.2	515	IP44
D10374	K35-EL-10-17 Tubular Motor X	10	17	115	AC110	60	31.2	515	IP44



35mm Tubular Motor
mechanical limit



Advantage

- Adopting plum output shaft structure design,no slip
 - Enhanced copper heat sink design
- Helical gear silent gearbox
 - Built-in brake system

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Motor length (mm)	Protection grade (IP)
D10120	K35-TP-6-28 Tubular Motor X	6	28	115	AC220	50/60	31.2	515	IP44
D10121	K35-TP-10-17 Tubular Motor X	10	17	115	AC220	50/60	31.2	515	IP44
D10382	K35-TP-10-17 Tubular Motor X	10	17	115	AC110	60	31.2	515	IP44
D10300	K35-IP-6-28 Tubular Motor X	6	28	115	AC220	50/60	31.2	620	IP44
D10301	K35-IP-10-17 Tubular Motor X	10	17	115	AC220	50/60	31.2	620	IP44



45mm DC Tubular Motor



Remote control

Advantage

- ⚡ 100-240V global voltage compatibility
- 🔋 DC motor drive says goodbye to overheat protection
- 🔊 Quieter than traditional AC motors
- ⚙️ Supports multi-speed adjustment and sync operation
- ⚙️ Precise Limit Setting
- ⚙️ Remote control
- 🛡️ Stall Protection
- ⏴ Downward fabric finishing



Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10651	K45-3ER-20-17/28 Tubular Motor X	20	17/28	100W	AC100-240	668	IP65
D10661	K45-3ER-40-12/17 Tubular Motor X	40	12/17	130W	AC100-240	668	IP65
D10671	K45-3ER-50-12 Tubular Motor X	50	12	130W	AC100-240	668	IP65



45mm DC Tubular Motor



Advantage

- ⚡ 100-240V global voltage compatibility
- 🔌 DC motor drive says goodbye to overheat protection
- 🔊 Quieter than traditional AC motors
- ⚙️ Supports multi-speed adjustment and sync operation
- 🔧 Embedded intelligent modules bid farewell to external attachments
- ⚙️ Precise Limit Setting
- 📶 Remote control
- 🛡️ Stall Protection
- ⬇️ Downward fabric finishing

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10653	K45-3ER-20-17/28 Tubular Motor X-NMS	20	17/28	100W	AC100-240	668	IP65
D10663	K45-3ER-40-12/17 Tubular Motor X-NMS	40	12/17	130W	AC100-240	668	IP65
D10673	K45-3ER-50-12 Tubular Motor X-NMS	50	12	130W	AC100-240	668	IP65



45mm DC Tubular Motor



Advantage

- ⚡ 100-240V global voltage compatibility
- 🔌 DC motor drive says goodbye to overheat protection
- 🔊 Quieter than traditional AC motors
- ⚙️ Supports multi-speed adjustment and sync operation
- 🔧 Embedded intelligent modules bid farewell to external attachments
- ⚙️ Precise Limit Setting
- 📶 Remote control
- 🛡️ Stall Protection
- ⬇️ Downward fabric finishing

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Protection level (IP)
D10656	K45-3ER-20-17/28 Tubular Motor X-NTY	20	17/28	100W	AC100-240	668	IP65
D10666	K45-3ER-40-12/17 Tubular Motor X-NTY	40	12/17	130W	AC100-240	668	IP65
D10676	K45-3ER-50-12 Tubular Motor X-NTY	50	12	130W	AC100-240	668	IP65



A21 double channel AC-24V-250W pavilion receiver

- Integrated design, it can control both lights and motors
- Switch between two-wire mode and three-wire mode at will
- IP66 Protection Level



Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor

Advantage

- Precise Limit Setting
- Stall Protection
- Gently lifts blinds up
- Downward fabric finishing



Remote control



45mm Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor



Alexa, open A;
Alexa, close A;
Alexa, set the A to 30%;
Alexa, increase A by 20%;
Alexa, decrease A by 10%;



OK google, open A;
OK google, close A;
OK google, stop A



Advantage

- Precise Limit Setting

Stall Protection

Gently lifts blinds up

Downward fabric finishing
- Eletronic Limit third limit


Helical gear silent gearbox

Adopting plum output shaft structure design,no slip

Enhanced copper heat sink design
- Smart speaker control

Mobile phone control

Remote control

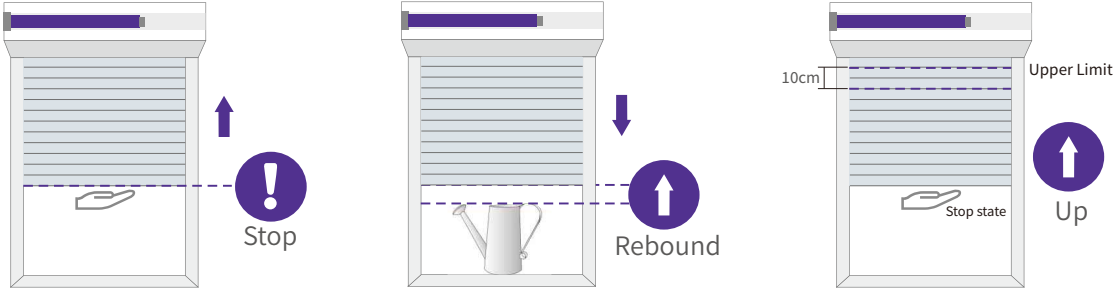

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Length (mm)
D10443	K45-ELR-20-18 tubular motor X NTY ⇄	20	18	150	AC220	50/60	≤45	IP66	650
D10444	K45-ELR-40-18 tubular motor X NTY ⇄	40	18	200	AC220	50/60	≤45	IP66	695
D10445	K45-ELR-50-12 tubular motor X NTY ⇄	50	12	200	AC220	50/60	≤45	IP66	695
D10601	K45-ELR-15-28 tubular motor X-NTY ⇄	15	28	150	AC110	60	≤45	IP66	650
D10603	K45-ELR-20-18 tubular motor X-NTY ⇄	20	18	150	AC110	60	≤45	IP66	650
D10606	K45-ELR-40-18 tubular motor X-NTY ⇄	40	18	200	AC110	60	≤45	IP66	695




45mm Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor



IP66




Alexa, open A;
Alexa, close A;
Alexa, set the A to 30%;
Alexa, increase A by 20%;
Alexa, decrease A by 10%;



OK google, open A;
OK google, close A;
OK google, stop A

Advantage

- Precise Limit Setting
- Stall Protection
- Gently lifts blinds up
- Downward fabric finishing
- Eletronic Limit third limit
- Helical gear silent gearbox
- Adopting plum output shaft structure design,no slip
- Enhanced copper heat sink design
- Smart speaker control
- Mobile phone control
- Remote control

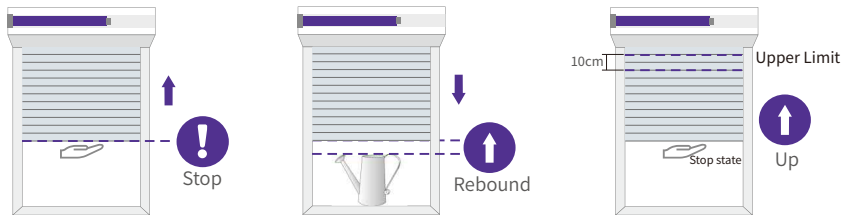

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Length (mm)
D10421	K45-ELR-20-18 tubular motor X-NMS ⇄	20	18	150	AC220	50/60	≤45	IP66	650
D10422	K45-ELR-40-18 tubular motor X-NMS ⇄	40	18	200	AC220	50/60	≤45	IP66	695
D10423	K45-ELR-50-12 tubular motor X-NMS ⇄	50	12	200	AC220	50/60	≤45	IP66	695

110V by order
Aluminium pipe: Φ60 octagonal pipe, Φ70 octagonal pipe, Φ63 groove pipe, Φ85groove pipe, Φ50 round pipe




45mm Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor



Advantage

- Precise Limit Setting
- Stall Protection
- Gently lifts blinds up
- Downward fabric finishing
- Eletronic Limit third limit
- Helical gear silent gearbox
- Adopting plum output shaft structure design,no slip
- Enhanced copper heat sink design
- Remote control
- Premium global RS-485 chipsets, guaranteed quality
- RS-485 with Instant Bi-directional Feedback

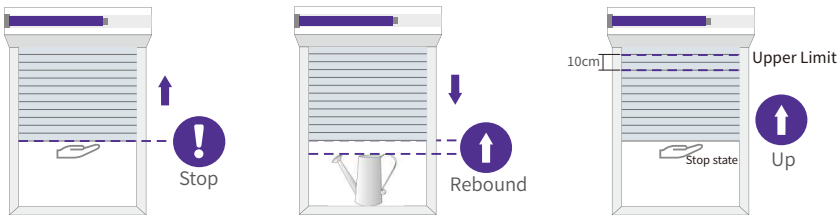

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Length (mm)
D10327	K45-ELR-20-18 tubular motor X-485 ⇄	20	18	150	AC220	50/60	≤45	IP45	650




45mm Bidirectional Built-in Wi-Fi
Tubular Motor

Fine Copper Motor



Advantage

- Precise Limit Setting
- Stall Protection
- Gently lifts blinds up
- Downward fabric finishing
- Eletronic Limit third limit
- Helical gear silent gearbox
- Adopting plum output shaft structure design,no slip
- Enhanced copper heat sink design
- Remote control

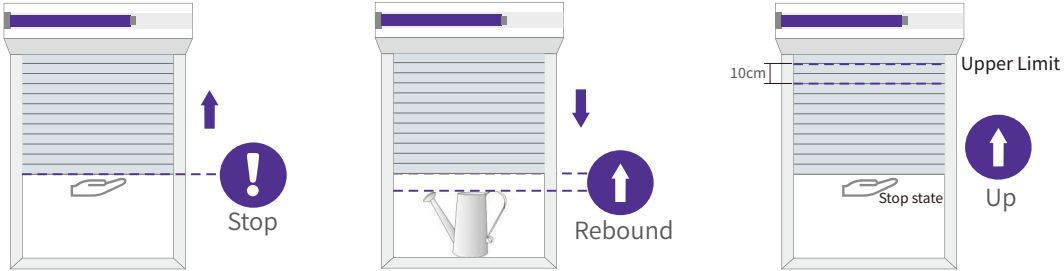

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Length (mm)
D10418	K45-ELR-20-18 tubular motor	20	18	150	AC220	50/60	≤45	IP66	650
D10419	K45-ELR-40-18 tubular motor	40	18	200	AC220	50/60	≤45	IP66	695
D10420	K45-ELR-50-12 tubular motor	50	12	200	AC220	50/60	≤45	IP66	695
D10633	K45-ELR-20-18 tubular motor X	20	18	150	AC110	60	≤45	IP66	650
D10636	K45-ELR-40-18 tubular motor X	40	18	200	AC110	60	≤45	IP66	695

110V by order
Aluminium pipe: Φ60 octagonal pipe, Φ70 octagonal pipe, Φ63 groove pipe, Φ85groove pipe, Φ50 round pipe






45mm Tubular Motor
Mechanical Limit

Fine Copper Motor



Advantage


-  Adopting plum output shaft structure design,no slip
-  Helical gear silent gearbox
-  Enhanced copper heat sink design
-  Built-in brake system

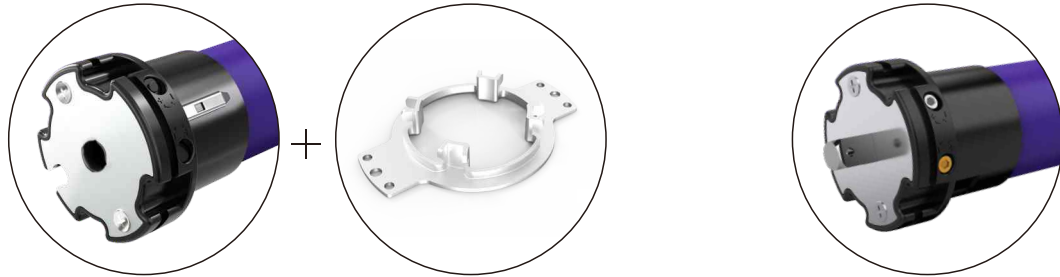

For Roller Shutter



Interpretation of item

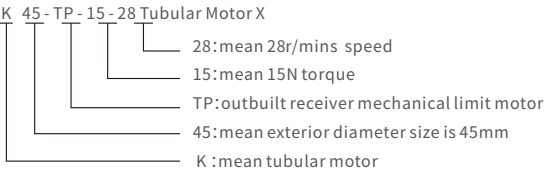

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Control method	Length (mm)
D10436	K45-TP-10-18 Tubular Motor X	10	18	75	AC220	50/60	≤28	IP44	wire control	527
D10437	K45-TP-15-28 Tubular Motor X	15	28	150	AC220	50/60	≤32	IP44	wire control	547
D10438	K45-TP-20-18 Tubular Motor X	20	18	150	AC220	50/60	≤32	IP44	wire control	547
D10439	K45-TP-20-28 Tubular Motor X	20	28	180	AC220	50/60	≤45	IP44	wire control	577
D10440	K45-TP-30-18 Tubular Motor X	30	18	180	AC220	50/60	≤45	IP44	wire control	567
D10441	K45-TP-40-18 Tubular Motor X	40	18	200	AC220	50/60	≤45	IP44	wire control	577
D10442	K45-TP-50-12 Tubular Motor X	50	12	200	AC220	50/60	≤45	IP44	wire control	577
D10330	K45-TPS-10-18 tubular motor X	10	18	75	AC220	50/60	≤28	IP44	wire control	503
D10332	K45-TPS-15-28 tubular motor X	15	28	150	AC220	50/60	≤32	IP44	wire control	510
D10331	K45-TPS-20-18 tubular motor X	20	18	150	AC220	50/60	≤32	IP44	wire control	510
D10333	K45-TPS-30-18 tubular motor X	30	18	180	AC220	50/60	≤45	IP44	wire control	530
D10334	K45-TPS-40-18 tubular motor X	40	18	200	AC220	50/60	≤45	IP44	wire control	550
D10336	K45-TPS-50-12 tubular motor X	50	12	200	AC220	50/60	≤45	IP44	wire control	550

110V by order
Aluminium pipe: Φ60 octagonal pipe, Φ70 octagonal pipe,Φ63 groove pipe, Φ85groove pipe, Φ50 round pipe



45mm Tubular Motor
Radio Control+Mechanical Limit


Fine Copper Motor




Two motor heads are available

Advantage

- Adopting plum output shaft structure design,no slip
- Enhanced copper heat sink design
- Built-in brake system
- Helical gear silent gearbox
- Remote control



Interpretation of item

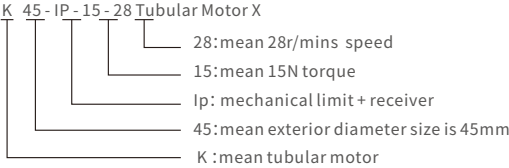

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Control method	Length (mm)
D10140	K45-IP-10-18 Tubular Motor X	10	18	75	AC220	50/60	≤28	IP44	RF	610
D10141	K45-IP-15-28 Tubular Motor X	15	28	150	AC220	50/60	≤32	IP44	RF	630
D10142	K45-IP-20-18 Tubular Motor X	20	18	150	AC220	50/60	≤32	IP44	RF	630
D10144	K45-IP-30-18 Tubular Motor X	30	18	180	AC220	50/60	≤45	IP44	RF	650
D10145	K45-IP-40-18 Tubular Motor X	40	18	200	AC220	50/60	≤45	IP44	RF	660
D10146	K45-IP-50-12 Tubular Motor X	50	12	200	AC220	50/60	≤45	IP44	RF	660
D10326	K45-IPS-20-18 tubular motor X	20	18	150	AC220	50/60	≤32	IP44	RF	600
D10325	K45-IPS-30-18 tubular motor X	30	18	180	AC220	50/60	≤45	IP44	RF	640
D10324	K45-IPS-40-18 tubular motor X	40	18	200	AC220	50/60	≤45	IP44	RF	620
D10323	K45-IPS-50-12 tubular motor X	50	12	200	AC220	50/60	≤45	IP44	RF	640

110V by order

Aluminium pipe: Φ60 octagonal pipe, Φ70 octagonal pipe, Φ63 groove pipe, Φ85 groove pipe, Φ50 round pipe



45mm Tubular Motor
Radio Control+Electronic Limit
Fine Copper Motor

Advantage


- Adopting plum output shaft structure design,no slip
- Enhanced copper heat sink design
- Built-in brake system
- Helical gear silent gearbox
- Remote control



Two motor heads are available



Interpretation of item

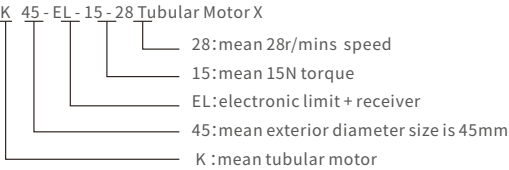

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Control method	Length (mm)
D10322	K45-EL-10-18 Tubular Motor X	10	18	75	AC220	50/60	≤28	IP44	RF	523
D10316	K45-EL-15-28 Tubular Motor X	15	28	150	AC220	50/60	≤32	IP44	RF	547
D10317	K45-EL-20-18 Tubular Motor X	20	18	150	AC220	50/60	≤32	IP44	RF	547
D10318	K45-EL-20-28 Tubular Motor X	20	28	180	AC220	50/60	≤45	IP44	RF	577
D10319	K45-EL-30-18 Tubular Motor X	30	18	180	AC220	50/60	≤45	IP44	RF	567
D10320	K45-EL-40-18 Tubular Motor X	40	18	200	AC220	50/60	≤45	IP44	RF	577
D10321	K45-EL-50-12 Tubular Motor X	50	12	200	AC220	50/60	≤45	IP44	RF	577

110V by order
Aluminium pipe: Φ63 groove pipe, Φ85 groove pipe, Φ50 round pipe, Φ60 octagonal pipe, Φ70 octagonal pipe



45mm Tubular Motor
Mechanical Limit



Fine Copper Motor



Advantage

-  Adopting plum output shaft structure design,no slip
-  Helical gear silent gearbox
-  Enhanced copper heat sink design
-  Built-in brake system

Interpretation of item

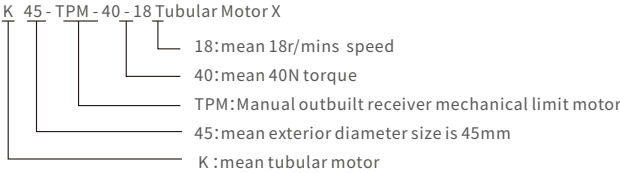

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Noise index (db)	Protection level (IP)	Control method	Length (mm)
D10315	K45-TPM-20-18 tubular motor X	20	18	150	AC220	50/60	≤45	IP44	wire control+manual	628
D10314	K45-TPM-30-18 tubular motor X	30	18	180	AC220	50/60	≤45	IP44	wire control+manual	650
D10311	K45-TPM-40-18 tubular motor X(head as picture)	40	18	200	AC220	50/60	≤45	IP44	wire control+manual	668
D10312	K45-TPM-50-12 tubular motor X(head as picture)	50	12	200	AC220	50/60	≤45	IP44	wire control+manual	668

110V by order
Aluminium pipe: Φ60 octagonal pipe, Φ70 octagonal pipe, Φ63 groove pipe, Φ85groove pipe, Φ50 round pipe





E40 Wooden Venetian Blinds Solution




E40 Wooden Venetian Blinds blend natural elegance with advanced smart shading, making them the premier choice for luxury hotels, modern offices, and high-end residences. Precision-engineered slats tilt effortlessly to deflect summer heat and diffuse harsh glare into a soft, ambient glow. By shielding interiors from harmful UV rays and lowering room temperatures, the system enhances HVAC efficiency without compromising your view—delivering the perfect harmony of style, comfort, and sustainable luxury.



venetian blinds motor

Advantage

- Direct connection to 100V~240V without transformer
- 4Nm high torque, Peak high-torque performance
- Integrated design with built-in smart chip
- Motor length only 265mm, designed for narrow windows
- Dual-mode power supply motor (Optional: lithium battery & transformer)
- Mobile phone control
- Smart speaker control
- Scene mode
- Silent Working





E40-3E-4-28 venetian blinds motor



Advantage

- Direct connection to 100V~240V without transformer
- 4Nm high torque,Peak high-torque performance
- Integrated design with built-in smart chip
- Mobile phone control
- Scene mode
- Smart speaker control
- Silent Working



Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50803	E40-3E-4-28 Venetian Blinds Motor-NMS	4	50	23/28	AC100-240	343x40x40	0.68



E40-3E-4-28 venetian blinds motor



Advantage

- Direct connection to 100V~240V without transformer
- 4Nm high torque,Peak high-torque performance
- Integrated design with built-in smart chip
- Mobile phone control
- Scene mode
- Smart speaker control
- Silent Working



Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50805	E40-3E-4-28 Venetian Blinds Motor-NTY	4	50	23/28	AC100-240	343x40x40	0.68



E40-3E-4-28 venetian blinds motor

485

Advantage

- Direct connection to 100V~240V without transformer
- 4Nm high torque,Peak high-torque performance
- Integrated design with built-in smart chip
- RS-485 with Instant Bi-directional Feedback
- Premium global RS-485 chipsets, guaranteed quality.
- Remote control



Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50821	E40-3E-4-28 Venetian Blinds Motor-485	4	50	23/28	AC100-240	343x40x40	0.68




E40-3E-4-28 venetian blinds motor

Advantage

- Direct connection to 100V~240V without transformer
- 4Nm high torque,Peak high-torque performance
- Integrated design with built-in smart chip
- Remote control
- Silent Working

Interpretation of item

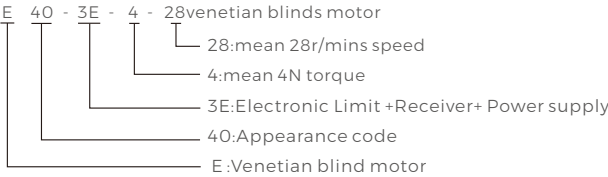

Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50801	E40-3E-4-28 Venetian Blinds Motor	4	50	23/28	AC100-240	343x40x40	0.68



E40-EL-3-28 venetian blinds motor



Advantage

- Motor length only 265mm, designed for narrow windows
- Dual-mode power supply motor (Optional: lithium battery & transformer)
- Integrated design with built-in smart chip
- Scene mode
- Mobile phone control
- Silent Working
- Smart speaker control



Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50833	E40-EL-3-28 Venetian Motor 12V-NMS	3	36	23/28	12	265x40x40	0.6



E40-EL-3-28 venetian blinds motor



Advantage

- Motor length only 265mm, designed for narrow windows
- Dual-mode power supply motor (Optional: lithium battery & transformer)
- Integrated design with built-in smart chip
- Scene mode
- Mobile phone control
- Silent Working
- Smart speaker control



Item NO	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50835	E40-EL-3-28 Venetian Motor 12V-NTY	3	36	23/28	12	265x40x40	0.6




E40-EL-3-28 venetian blinds motor

Advantage

- Motor length only 265mm, designed for narrow windows
- Dual-mode power supply motor (Optional: lithium battery & transformer)
- Integrated design with built-in smart chip
- Silent Working
- Remote control


Interpretation of item

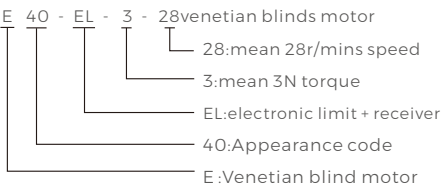


Item NO.	Item	Torque (N.m)	Power (w)	Rated revolution (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50831	E40-EL-3-28 Venetian Blinds Motor 12V	3	36	23/28	12	265x40x40	0.6



No Need Extra Transformer

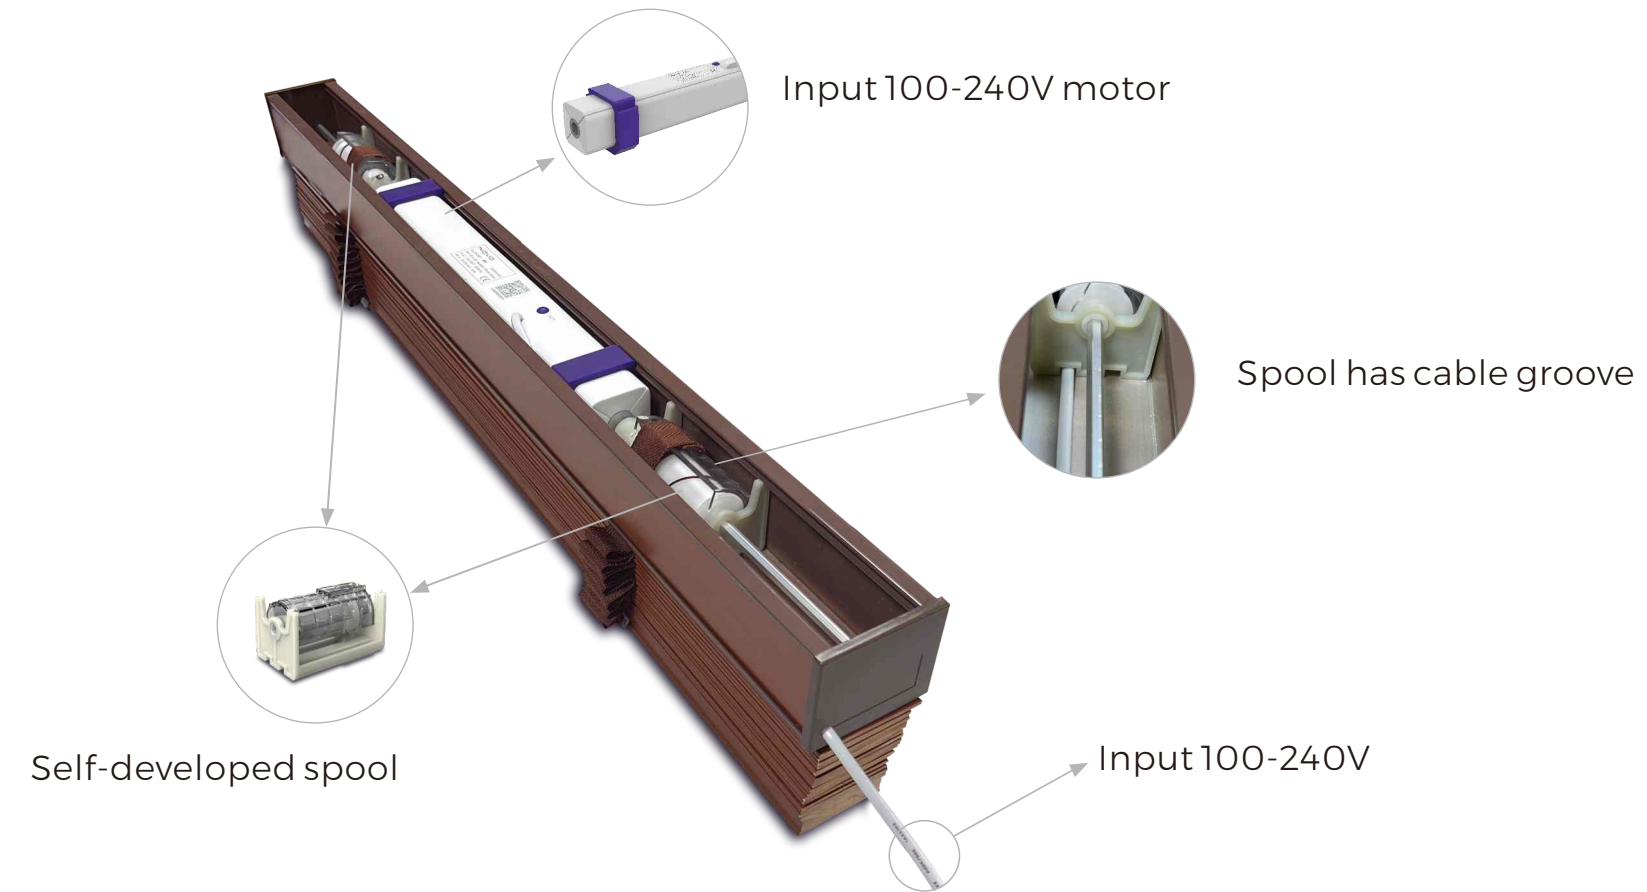

Power By Battery Or Extra Transformer

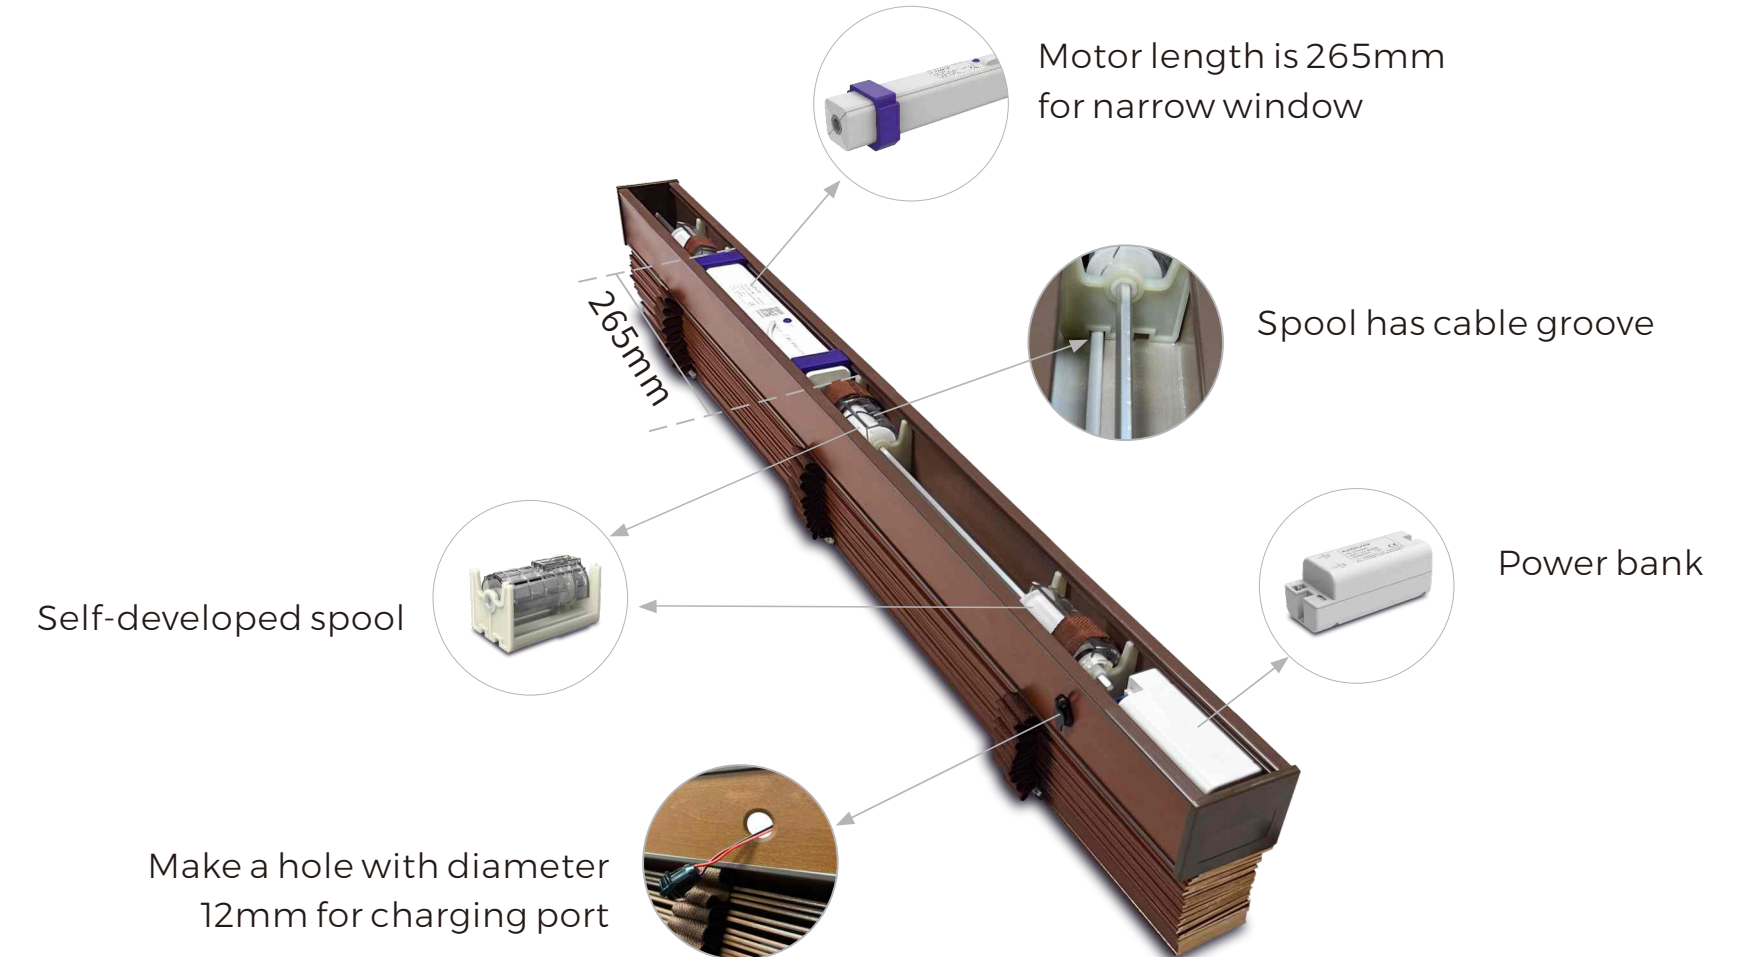

SOLUTION

5

Electric Day And Night Honeycomb Solutions


Day and night system integrate sheer and blackout honeycomb to control lighting and sightlines. It can provide lighting, shade and privacy at the same time. By adjusting the position of the middle rod, it can achieve the effects of improving lighting, blocking sight or blocking light.

One system has multiple uses. The honeycomb is energy-saving and prevents heatstroke and cold. An excellent solution for those areas requiring day time privacy while still maximizing thermal efficiency. The full brightness of day when you want it, and the comfort and cosiness of a blackout when you don't. They also take up far less space than double roller blinds and provide the insulation that roller blinds do not have. It does everything you'd need it to do and is versatile enough to bring its uniquely practical style to any room.



Day And Night Blinds Motor System


Make hard things easy
Revolutionary innovation, Highly integrated design

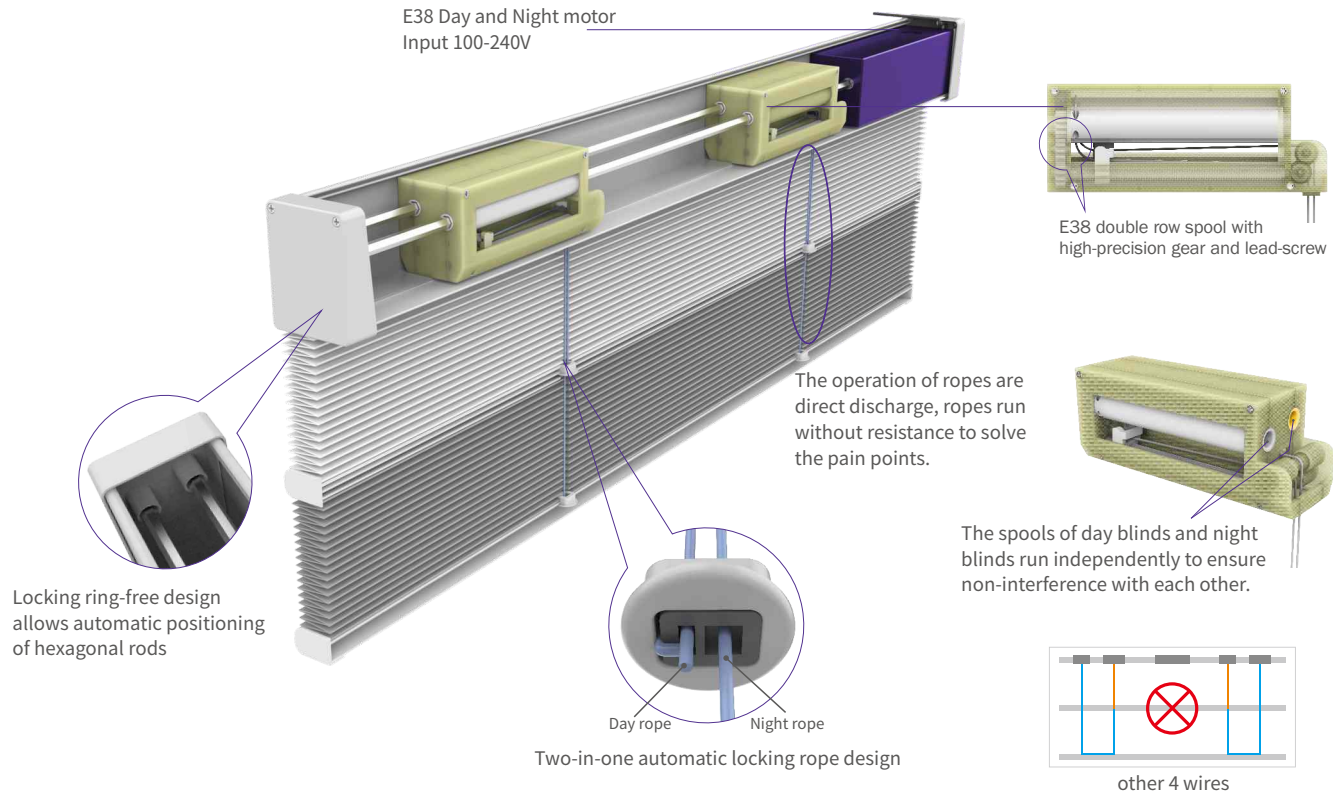

 Tuya smart	 Zigbee	 Xiaomi HyperOS Connect	 works with Xiaomi Home	 485	 lithium battery
----------------	------------	----------------------------	----------------------------	---------	---------------------



Day And Night Blinds Motor System



Advantage

- Silent Working
- Remote control
- Scene mode
- Mobile phone control
- High torque
- Smart speaker control
- Adjustable speed

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50701	E38-3E-0.5 Day and Night motor	0.5	23-35	24	AC100-240	151	0.3
D50708	E38-3E-0.5 Day and Night motor-NTY	0.5	23-35	24	AC100-240	151	0.3



Day And Night Blinds Motor System



Advantage

- Silent Working
- Remote control
- Scene mode
- Mobile phone control
- High torque
- Smart speaker control
- Adjustable speed

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50705	E38-3E-0.5 Day and Night motor-NMS	0.5	23-35	24	AC100-240	151	0.3



Day And Night Blinds Motor System
485




Advantage

- Premium global RS-485 chipsets, guaranteed quality
- RS-485 with Instant Bi-directional Feedback
- Remote control
- Silent Working
- Adjustable speed

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50718	E38-3E-0.5 Day and Night motor-485 ⇄	0.5	23-35	24	AC100-240	151	0.3



Day And Night Blinds Motor System
Lithium Battery



Compatible with slim solar panel

Advantage


- Integrated design
- Type-C interface
- Support fast charging
- Low power design
- Support power bank
- Silent Working
- Remote control



Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50720	E38-4E-0.5 Day and Night Motor	0.5	23-35	16	DC5V	151	0.4



Universal Version
Front and Rear Dual Smart Motors
NMS



Advantage

- 100–240V wide Voltage
- Remote control
- Adjustable speed
- High-Torque Dual Motors
- Mobile phone control
- Two-in-One Design
- Smart speaker control



Item NO	Item	Torque (N.m)	Power (w)	Speed (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50901	E65-3E-1 day night blinds motor	1	28	20-30	AC100-240	160x65x43	0.4
D50905	E65-3E-1 day night blinds motor-NMS ⇄	1	28	20-30	AC100-240	160x65x43	0.4



Universal Version
Front and Rear Dual Smart Motors
NTY



Advantage


- 100–240V wide Voltage
- Remote control
- Adjustable speed
- High-Torque Dual Motors
- Mobile phone control
- Two-in-One Design
- Smart speaker control



Item NO	Item	Torque (N.m)	Power (w)	Speed (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50908	E65-3E-1 day night blinds motor-NTY ⇄	1	28	20-30	AC100-240	160x65x43	0.4



Lithium Battery Version
Front and Rear Dual Smart Motors
NMS



Compatible with slim solar panel

Advantage


- Integrated design
- Type-C interface
- Support fast charging
- Low power design
- Support power bank
- Silent Working
- Remote control
- Two-in-One Design



Item NO	Item	Torque (N.m)	Power (w)	Speed (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50920	E65-4E-1 day night motor-2600mAh	1	22	20-30	DC5	160x65x43	0.4
D50923	E65-4E-1 day night motor NMS-2600mAh ⇄	1	22	20-30	DC5	160x65x43	0.4



Lithium Battery Version
Front and Rear Dual Smart Motors
NTY



Compatible with slim solar panel

Advantage

- Integrated design
- Type-C interface
- Support fast charging
- Low power design
- Support power bank
- Silent Working
- Remote control
- Two-in-One Design



Item NO	Item	Torque (N.m)	Power (w)	Speed (rpm)	Input voltage (v)	Motor length (mm)	Motor weight (kg)
D50925	E65-4E-1 day night motor NTY-2600mAh ⇄	1	22	20-30	DC5	160x65x43	0.4



Electric Venetian Blinds Solution




NOVO electric blinds are widely used in hotels, office buildings, villas, residences and other places. While blocking the summer sunlight, it also can effectively reflect the strong outdoor sunlight into the room in a diffuse way, which not only ensures the brightness of the room, but also does not irritate our eyes. Let our line of sight extend from indoors to outdoors without worrying about ultraviolet rays, effectively reducing the indoor temperature and making the air conditioner more efficient and energy-saving.



Embedded Venetian Blinds System

Advantage


Motor built-in electronic limit + receiver, 3350mAh lithium battery normal use of about 180 days, low power consumption design allows longer use

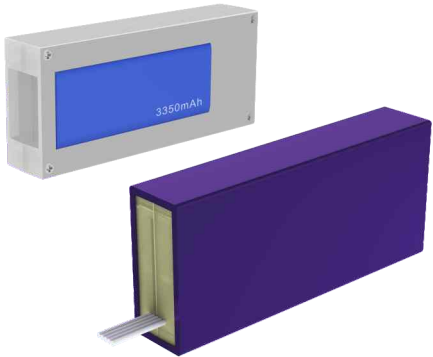


Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)
D10980	E19-2E-SA-0.5 venetian motor II -7.4V	0.5	50	7	DC24	95
D10985	E19 embedded venetian lithium battery-3350mAh	-	-	-	DC7.4	95



Embedded Drill-Free System



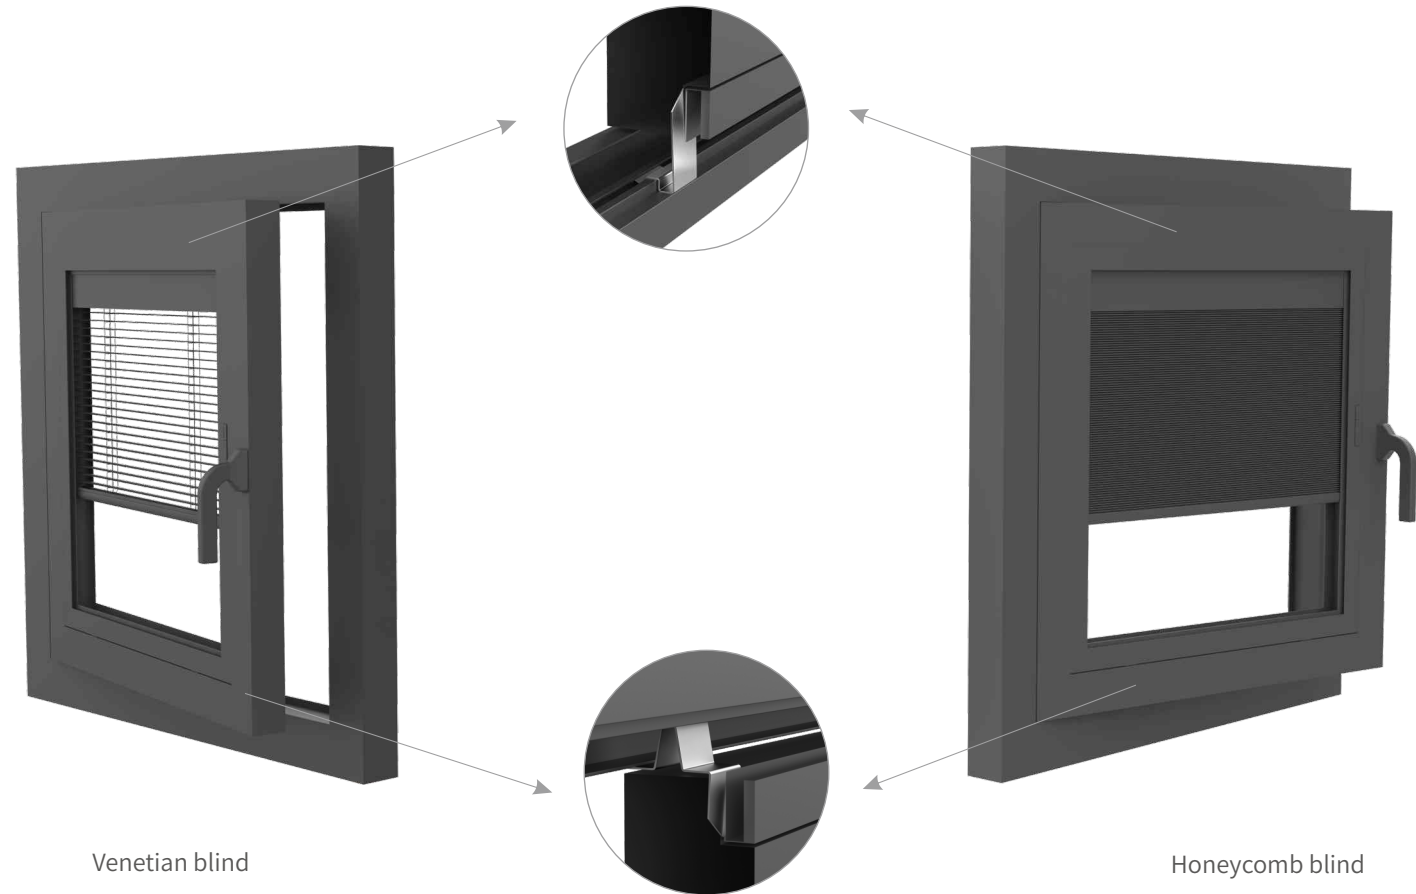


Embedded Drill-Free System

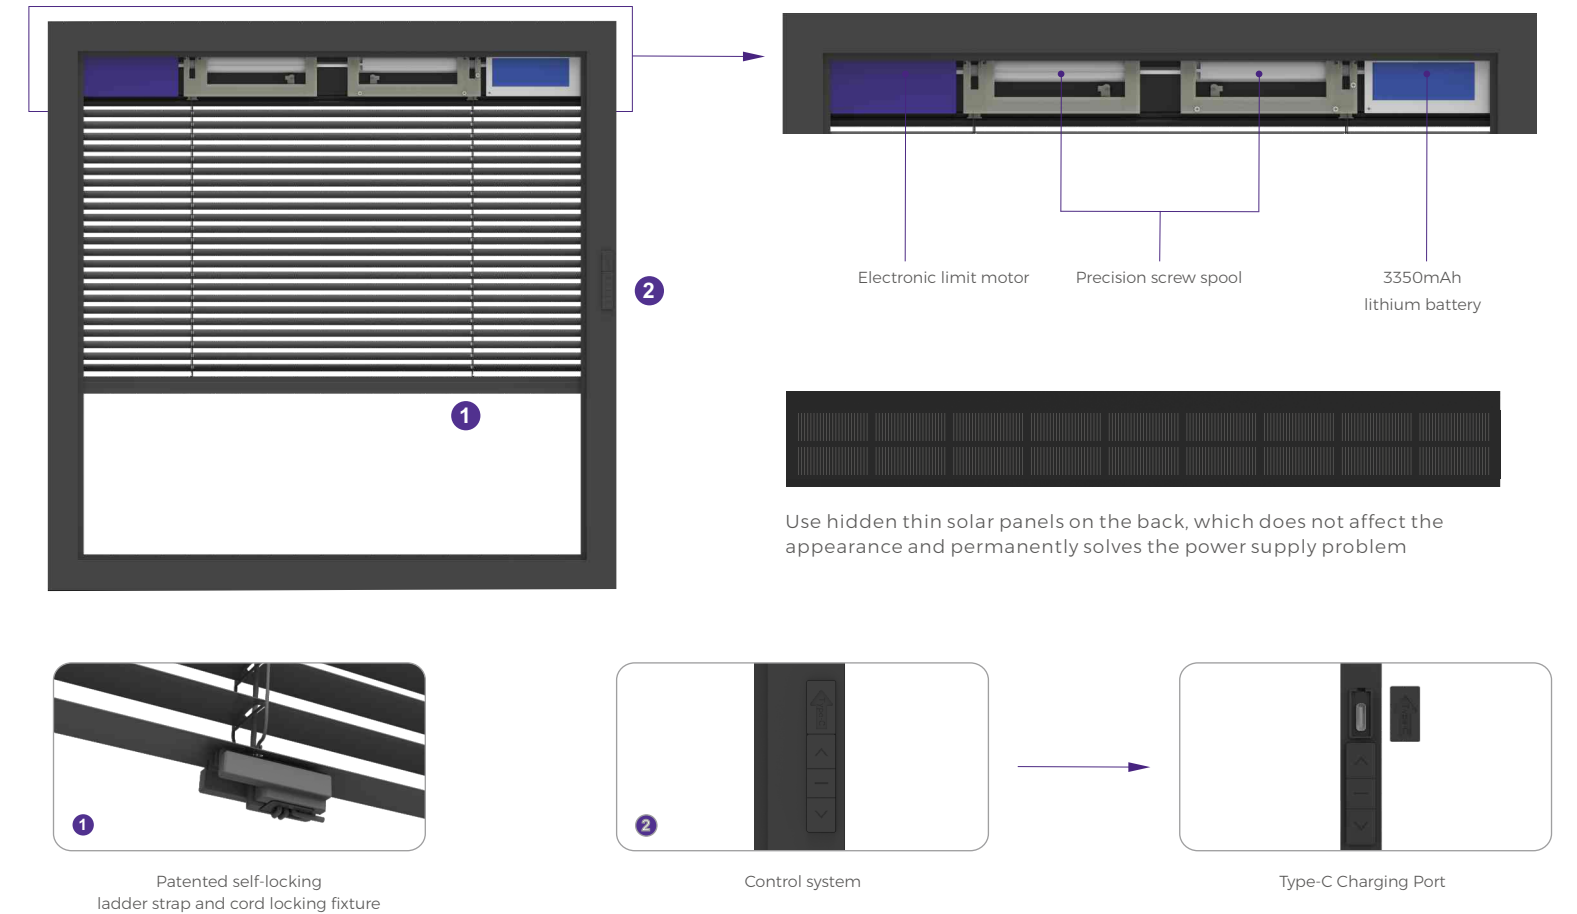





Embedded Venetian Blinds System

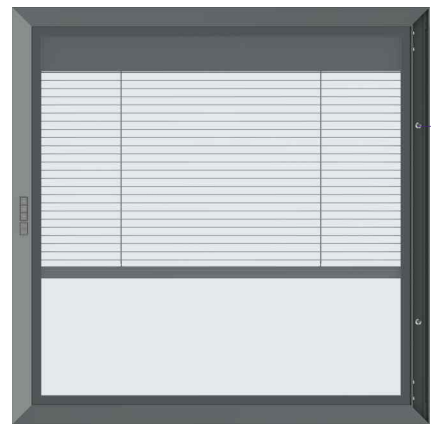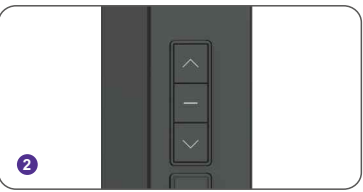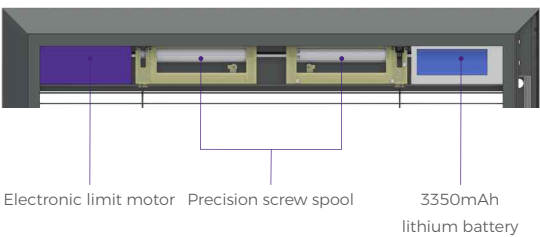

Embedded Venetian Blinds System

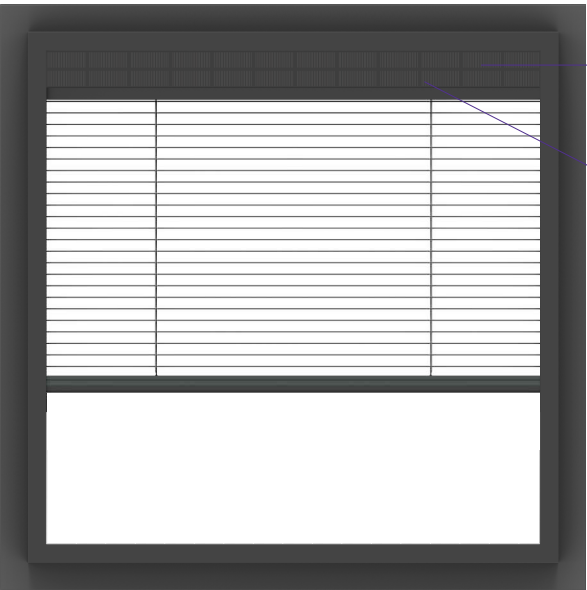

Back side



Use hidden thin solar panels on the back, which does not affect the appearance and permanently solves the power supply problem



Item NO	Item	Input voltage (v)	Motor length (mm)
D22532	A20-10V-E19 embedded solar panel II-gray	DC10V	401x51x3
D22533	A20-5V hollow glass embedded solar panel-gray	DC5V	401x51x3



Battery Honeycomb And Venetian Blinds System

Advantage

3350mAh lithium battery normal use of about 180 days
low power consumption design allows longer use

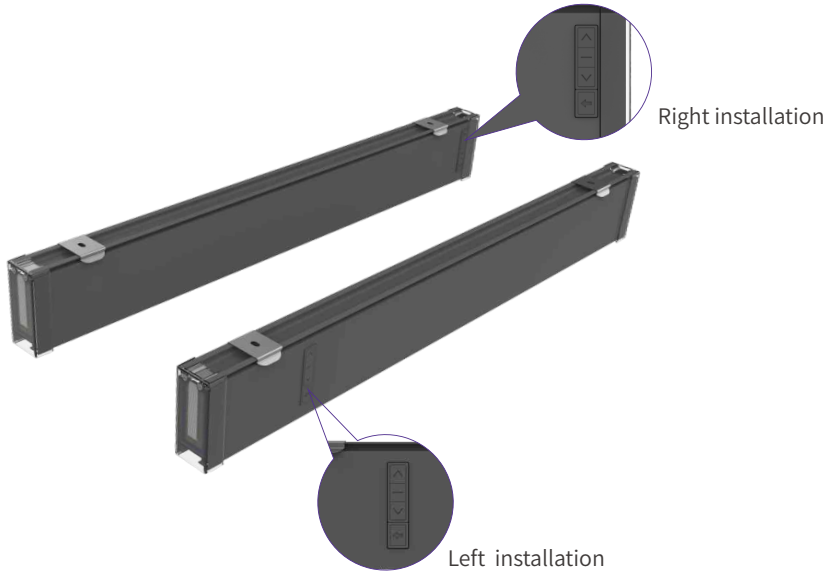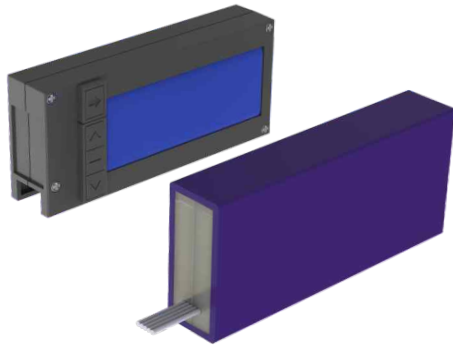

Item NO	Item	Rated torque (N.m)	Rated speed (rpm)	Power (w)	Input voltage (v)	Frequency (Hz)	Length (mm)
D10986	E19 embedded venetian lithium battery button-gray	—	—	—	DC7.4	—	95



The Honeycomb Lithium Battery Integrated System

Advantage

Can be installed up or down as you like
Can be charged up or down as you like
At the same time, the charging can be from the top or from the bottom.








E19 DC Motor

Advantage

- Small size
- High torque
- Silent operation
- Outer soft silicone cover can reduce noise

Interpretation of item

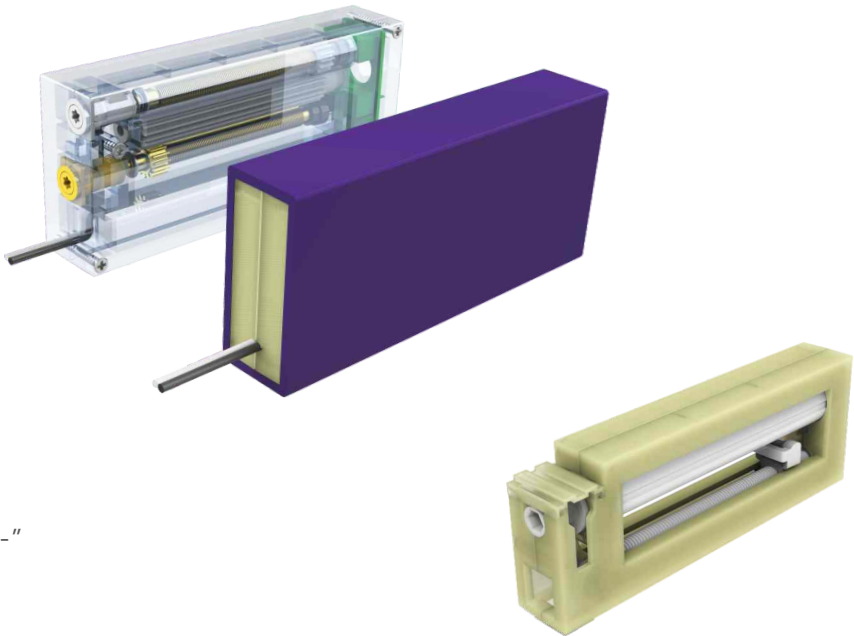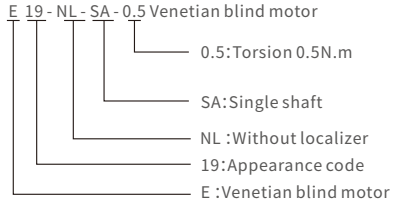

High-precision gear and lead-screw drive ensure that the rope will not have errors, jumps, overlaps and other problems.


Item NO	Item	Working voltage (v)	Rated torque (N.m)	Rated speed (rpm)	Noise index (db)	power (W)	Control method	Length (mm)
D10901	E19-NL-SA-0.5 Venetian Blinds Motor II-24V	DC24	0.5	52	≤45	12	wire control	95
D10902	E19-NL-SA-0.5 Venetian Blinds Motor II-12V	DC12	0.5	52	≤45	12	wire control	95
D10903	E19-NL-SA-0.5 Venetian Blinds Motor II-7.4V	DC7.4	0.5	52	≤45	9.6	/	95
D10920	E19-CL-5 localizer II	DC5-24	—	—	—	—		95



Venetian Blinds System

Advantage

- Small size
- High torque
- Silent operation
- Outer soft silicone cover can reduce noise

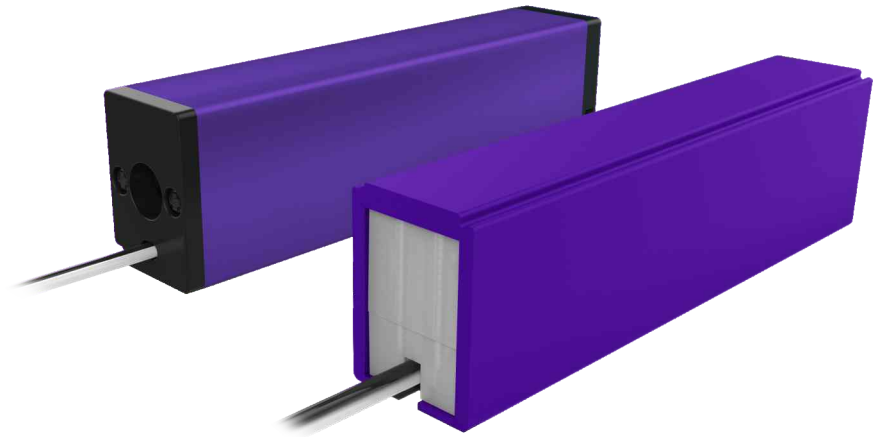

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)
D10775	E14-NL-SA-0.5Venetian blind motor-24V	0.5	52	12	DC24	93
D10776	E14-NL-SA-0.5 Venetian blind motor	0.5	52	12	DC12	93
D10738	21A localizer	—	—	—	DC12-24	95



Venetian Blinds System

Advantage

- Extended sleeve
- Constant speed synchronization function
- Two adjustable speed
- Based on stability
- Quiet and powerful
- Integrated limit and receiver
- Precise limit
- Unique limit protection cover



Code: H20121
Name: E24 Standard rubber ring II -R
Size (H*W*T): 24.8x24.8x4.5mm



Code: H20123
Name: E24 Roman blinds A rubber ring II -R
Size (H*W*T): 30.7x24x4.5mm



Code: H20128
Name: E24 Roman blinds B rubber ring II -R
Size (H*W*T): 34.1x25x4.5mm



Code: H20119
Name: E24 Roman blinds C rubber ring II -R
Size (H*W*T): 31.4x29x4.5mm



Code: MH40083
Name: E24 YAMU A rubber ring II -R
Size (H*W*T): 31.6x32x4.5mm



Code: H20125
Name: E24 YAMU B rubber ring II -R
Size (H*W*T): 31.6x29x4.5mm



Venetian Blinds System



Item NO.	Item	Working voltage (v)	Rated torque (N.m)	Rated speed (rpm)	Noise index (db)	power (W)	Control method	Length (mm)
D50628	E24-EL-SA-1Venetian blind motor R	DC24	1.0	30/45	≤45	13	RF	140
D50633	E24-EL-SA-1.3 Venetian blind motor R	DC24	1.3	30/45	≤45	19	RF	149
D50636	E24-EL-DA-1.5 Venetian blind motor R	DC24	1.5	30/45	≤45	19	RF	234
D50641	E24-EL-DA-1.2 Venetian blinds motor R	DC12	1.2	30/45	≤45	19	RF	234
D50661	E24-EL-SA-1.3 Venetian motor R-power on	DC24	1.3	30/45	≤45	19	RF	149
D50662	E24-EL-DA-1.5 Venetian motor R-power on	DC24	1.5	30/45	≤45	19	RF	234
D50630	E24-EL-DA-1.5 Skylight venetian motor R	DC24	1.5	30/45	≤45	19	RF	234
D10722	E24-NLA-SA-1 Venetian blind motor	DC24	1.0	45	≤35	7	wire control	136
D50629	E24-NL-SA-1.3 Venetian motor R	DC24	1.3	45	≤45	13	wire control	115
D50627	E24-NL-SY-1 Venetian motor R	DC24	1.0	32	≤45	7	wire control	131
D50639	E24-NL-SA-1.3 Venetian motor R	DC12	1.3	32	≤45	7	wire control	115
D50640	E24-NL-DA-1.5 Venetian motor R	DC12	1.5	45	≤45	13	wire control	193
D50637	E24-NL-DY-1.5 Venetian blinds motor R	DC24	1.5	45	≤45	19	wire control	206
D50634	E24-NL-SY-1.3 Venetian blind motor R	DC24	1.3	32	≤45	13	wire control	142
D50635	E24-NL-DA-1.5 Venetian blinds motor R	DC24	1.5	32	≤45	19	wire control	208
D50638	E24-NL-DY-0.8 Venetian Motor R	DC24	0.8	32	≤35	7	wire control	115
D10734	E24-CL-6 localizer	DC12-24	-	-	-	-	-	101
D10735	E24-CL-5 localizer	DC12-24	-	-	-	-	-	101
D10737	YME24-CL-4 localizer	DC12-24	-	-	-	-	-	100

*Note: The above motor items, we can make 12V by order.





Venetian Blinds System


Interpretation of item

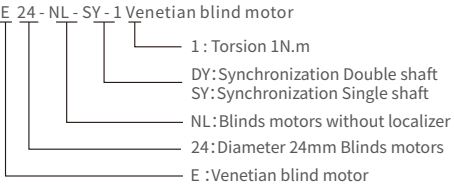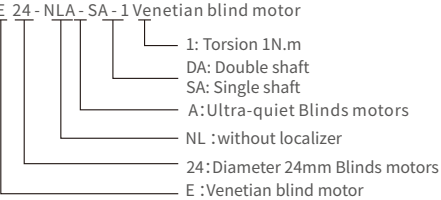


Interpretation of item

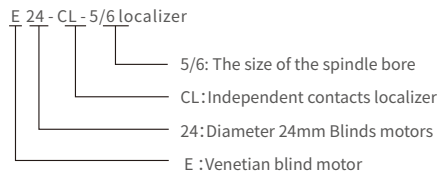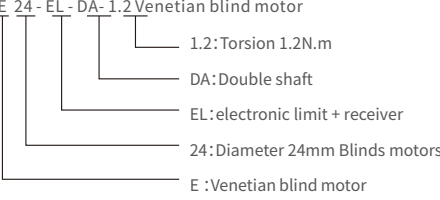


E24 in-built Motorized Venetian Blinds

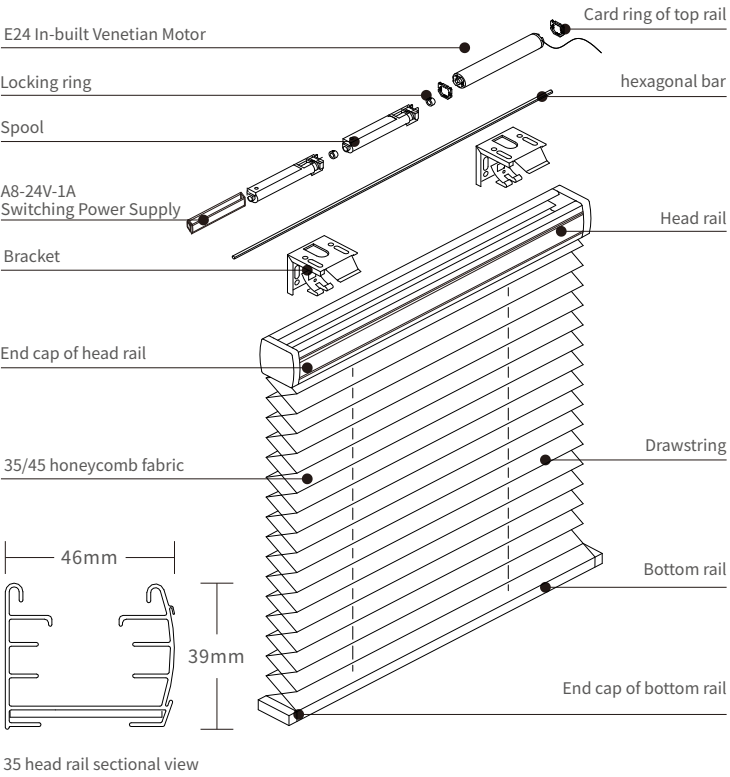

E24 External Motorized Venetian Blinds

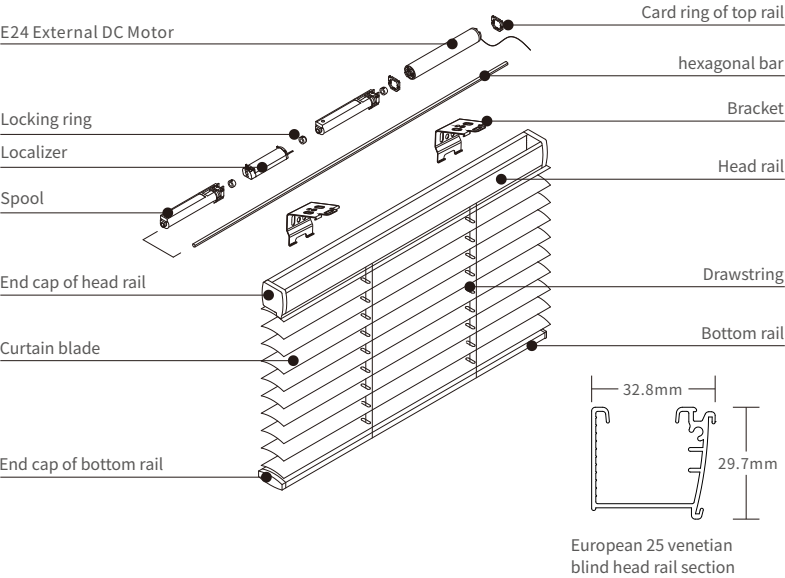

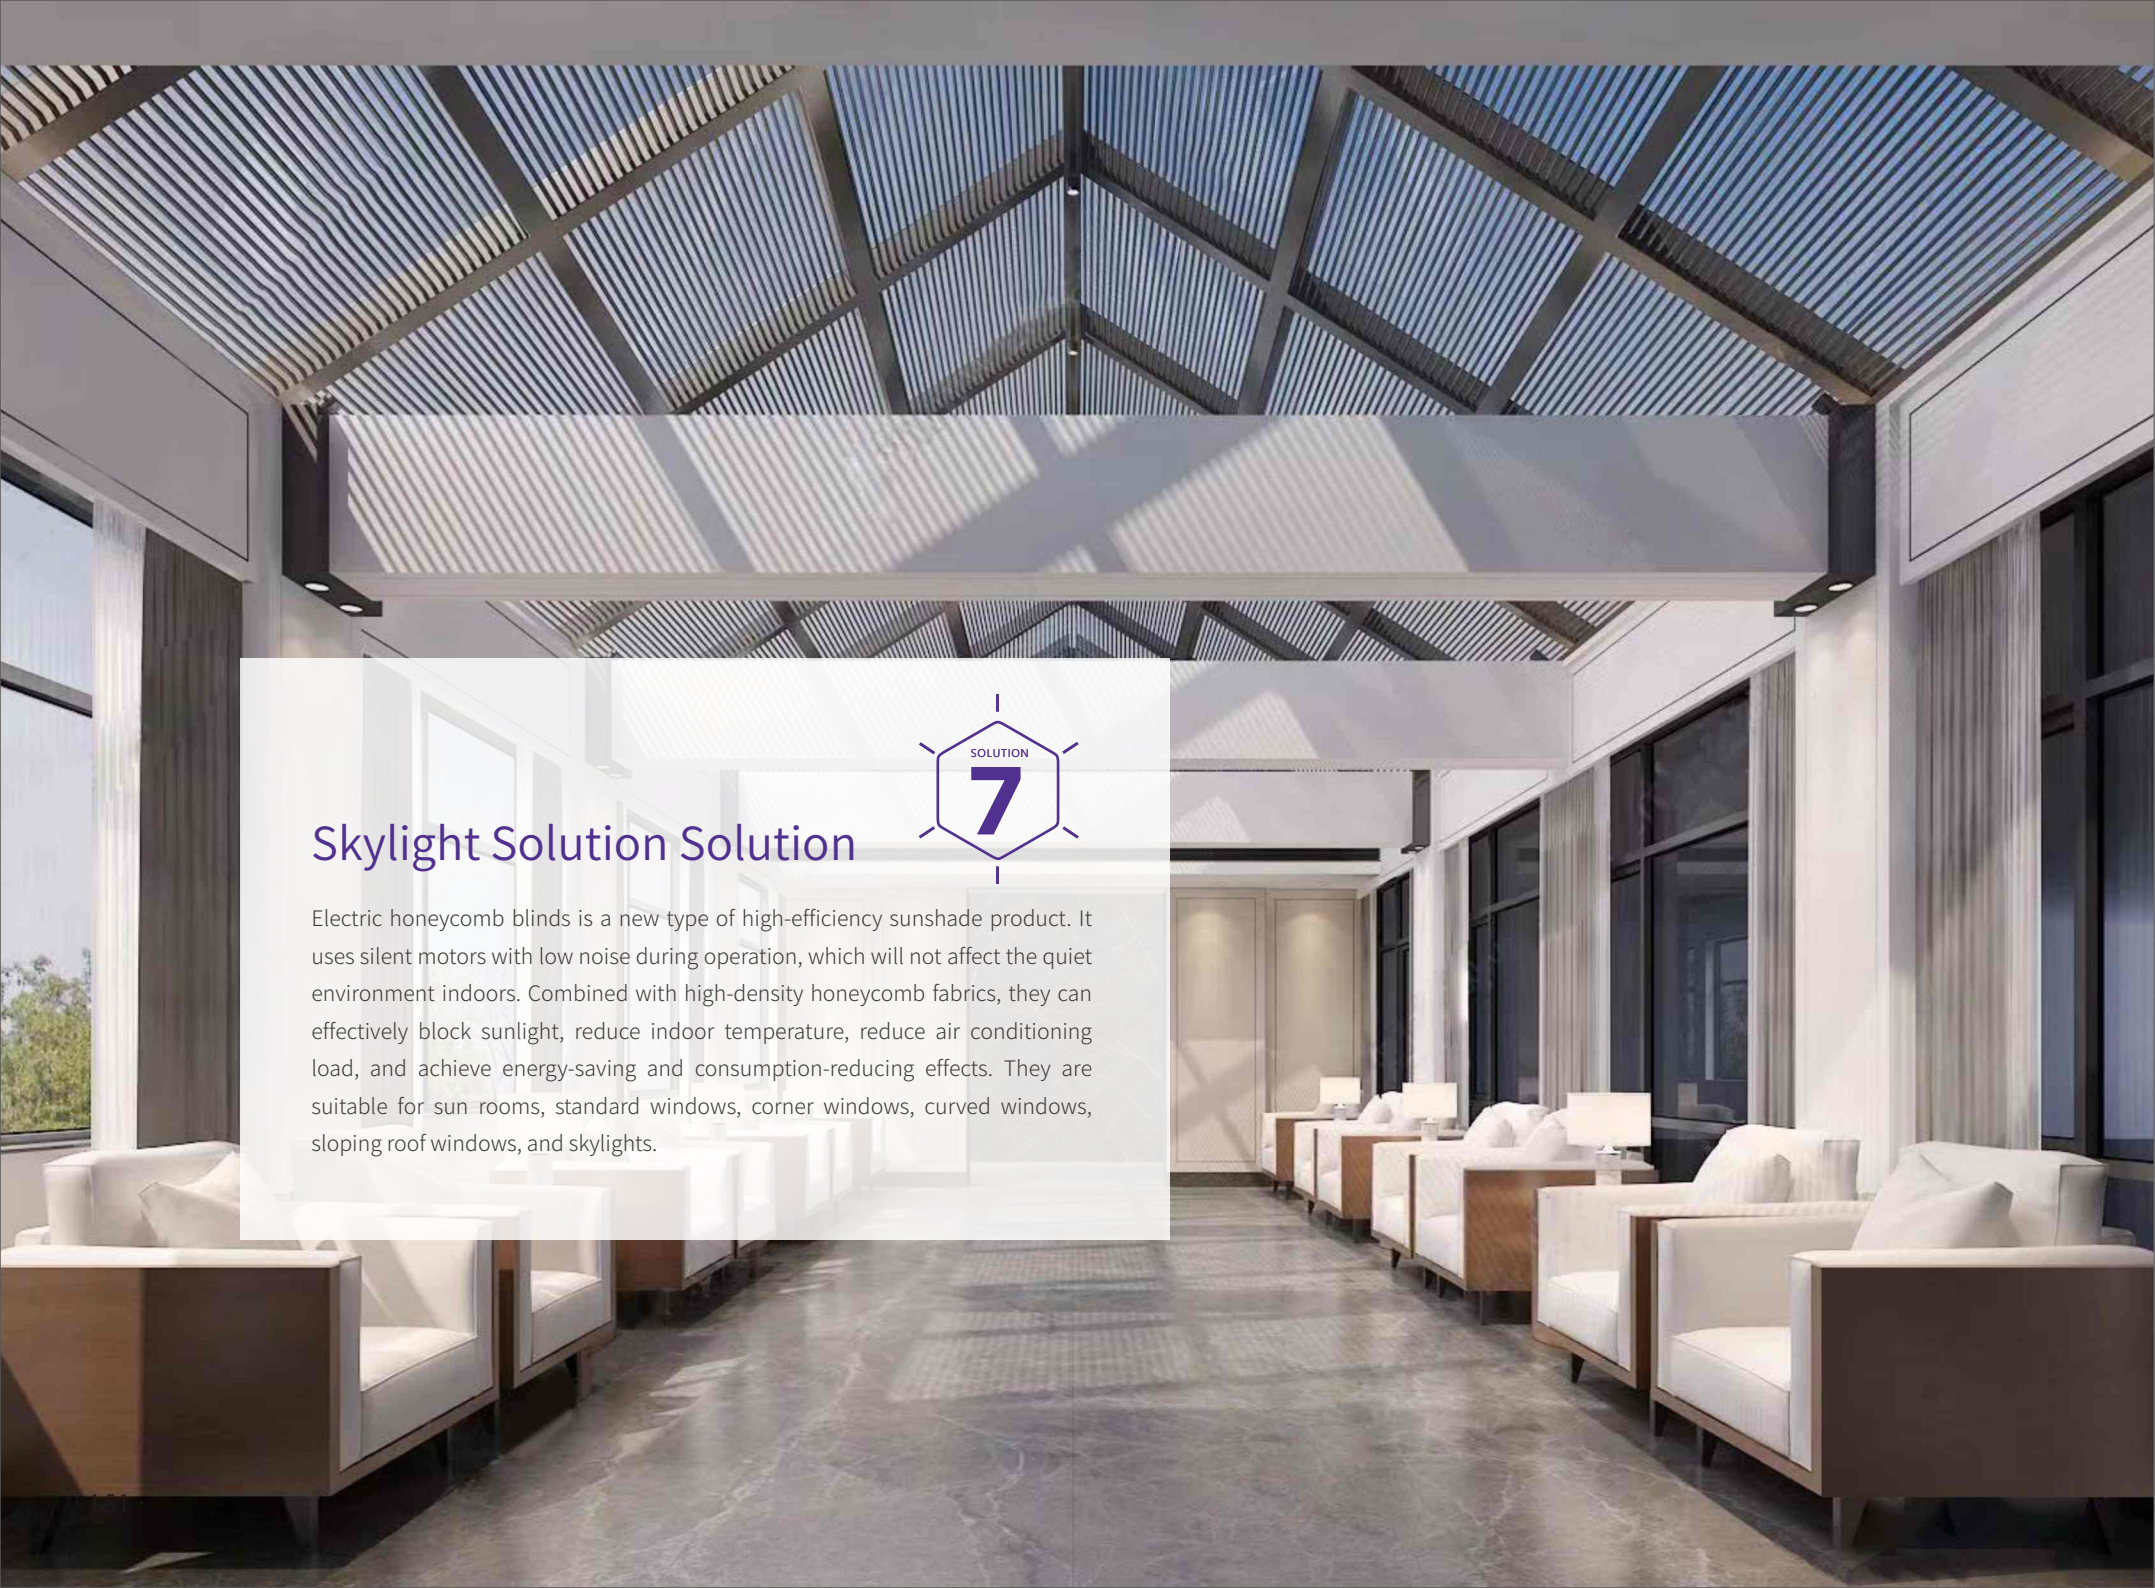

The 3rd generation day and night honeycomb skylight system








 Remote control

Advantage

- The world's first fully integrated dual-motor system: Zero external power required + effortless installation.
- Day blinds and night blinds are independently controlled, and the light and shadow percentage can be freely controlled.
- All-metal edging + 4-material universal matching system, significantly optimizing inventory management.
- Top/vertical/horizontal installation, 30 minutes fast installation.
- Support full smart home systems, get high-end experience.

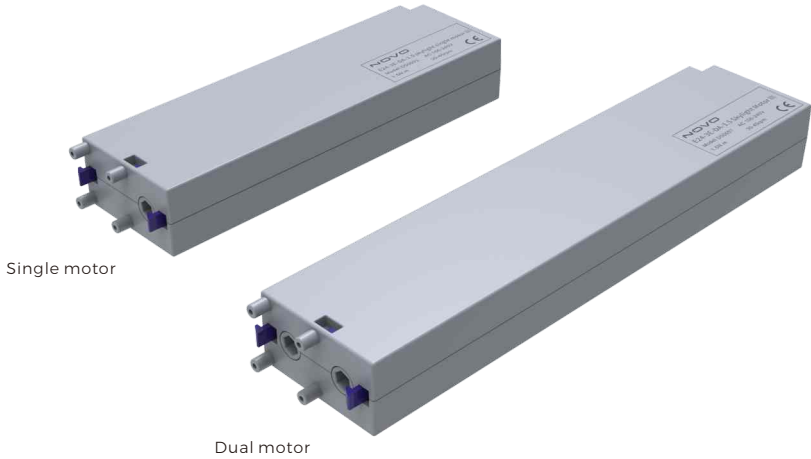


Skylight Solution Solution



Electric honeycomb blinds is a new type of high-efficiency sunshade product. It uses silent motors with low noise during operation, which will not affect the quiet environment indoors. Combined with high-density honeycomb fabrics, they can effectively block sunlight, reduce indoor temperature, reduce air conditioning load, and achieve energy-saving and consumption-reducing effects. They are suitable for sun rooms, standard windows, corner windows, curved windows, sloping roof windows, and skylights.


Interpretation of item

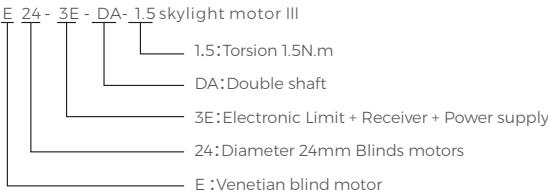

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)
D50691	E24-3E-DA-1.5 skylight single motor III	1.5	19	30-45	AC100-240	180x54x30
D50695	E24-4E-DA-1.5 skylight single motor III	1.5	19	30-45	DC5V	240x54x34
D50697	E24-3E-DA-1.5 skylight motor III	1.5	19	30-45	AC100-240	240x54x34




The 3rd generation day and night honeycomb skylight system

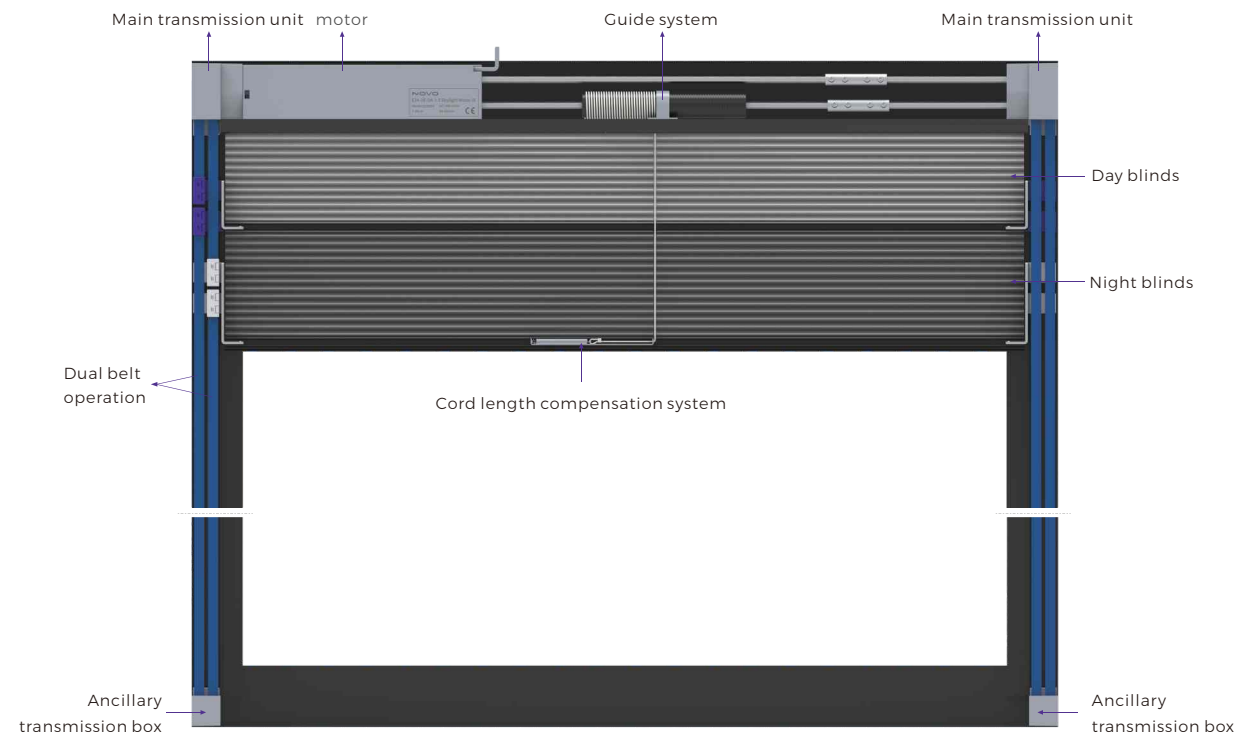


The 3rd generation day and night honeycomb skylight structural diagram




Top installation



Vertical installation



Horizontal installation



Double open



The 2nd generation honeycomb skylight motor

Advantage

- ⚡ Built-in power supply,input 100-240V
- 🛑 Stop when encountering resistance
- 🔇 Silent Working
- 🔋 Support solar panel charging
- ⚙️ No need to adjust the limit
- ⏱️ Adjustable speed
- 🔌 Type-C interface






The 2nd generation honeycomb skylight motor

Advantage

- Double output motor + electronic limit + receiver + transformer
- Patented self-locking motor head and track connection make installation easier
- Made of extremely high temperature and low temperature resistant anti-aging materials
- Strict selection of electronic components is more suitable for skylight

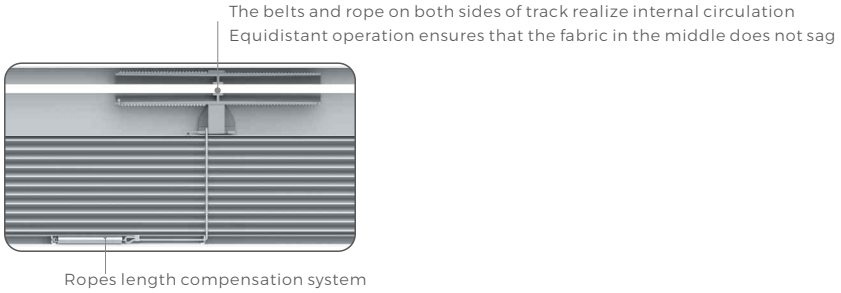

Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)
D50671	E24-3E-DA-1.5 Skylight motor II	1.5	30-45	19	AC100-240	180




The 2nd generation honeycomb skylight motor

Advantage

- Reliable quality, powerful function and stable performance
- Electric limit + built-in receiver, constant speed synchronization
- Automatic Limit + Silent with High horsepower
- No need set limit / stop by resistance



Mainstream Type-C interface

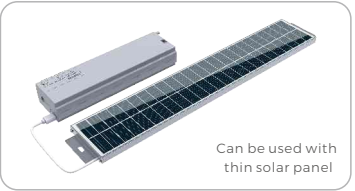

Can be used with thin solar panel



Item NO	Item	Torque (N.m)	Speed (rpm)	Power (w)	Input voltage (v)	Motor length (mm)
D50681	E24-4E-DA-1.2 Skylight motor II	1.2	30-45	19	DC5V	180

N19 Super Silent

Skylight Motor-18.9dB

three advantages

Solve the problem of
hard to produce and instal



Free stitch



easy installation




Beautiful appearance

Item NO	Item	Torque (N.m)	Rated revolution (rpm)	Power (w)	Input voltage (v)	Speed (cm/s)	Motor length (mm)	Motor weight (kg)
N30089	N19-3E-2 Skylight curtain Motor	2	80-120	48	AC100-240	10-20	322	1.27



Interpretation of item

N 19 -3E - 2 Curtain Motor

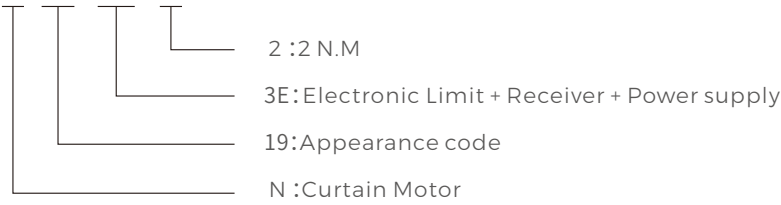

Advantage

- Sewing-free fabric technology.
- Automatically memorizes the limit.
- Single-opening and double-opening modes.
- One motor one blinds or for several blinds.
- Wheel runners make the operation smoother and quieter.

N19 Folding Skylight Single Open,Double Open




Folding Skylight Track Single
Open Mode Sketch Map



Folding Skylight Track Double
Open Mode Sketch Map

N19 Folding Skylight System Diagram

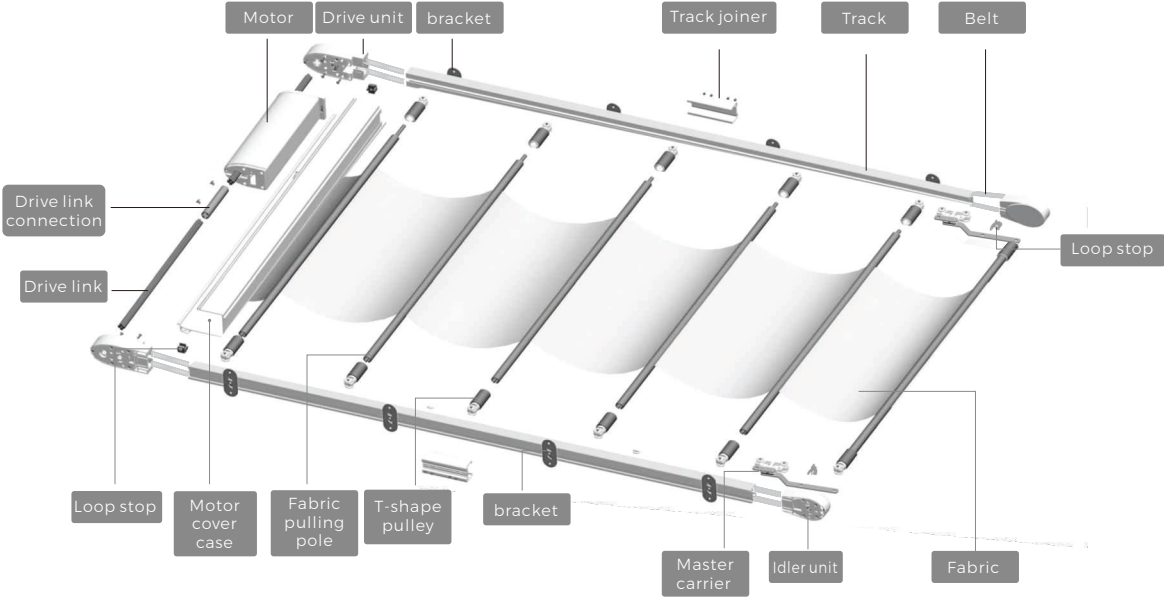



Control SystemSolutions



The control system can perfectly cooperate with various NOVO motors, and realize various control methods. Provide opening and closing functions for curtain motors, dream blind motors, Venetian blind motors, and tubular motors. At the same time, it can realize long-distance remote control in multiple ways such as single control and group control. It has the characteristics of strong anti-interference ability, high receiving sensitivity, stable center frequency, and convenient debugging. The professional R&D team can also customize the products of the control system according to the needs of customers to meet the needs of different customers.



Transmitter System



- 360-degree stepless knob for easy dimming
- Open, close, 90 degrees and 180 degrees shortcut keys
- Low power consumption design, equipped with AAA battery, the battery life is up to 2 years

Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D33123	A15-LED Dream/Vertical Blinds Rotary Knob Transmitter	7#x2	-20~+60	IP40
D33120	A15 - Dream/Vertical Blinds Rotary Knob Transmitter	7#x2	-20~+60	IP40
D33127	A15 -E40 Venetian Blinds Rotary Knob Transmitter	7#x2	-20~+60	IP40



Transmitter System

- The core components are imported
- Strong compatibility
- Durable
- Push-button switch
- Humanized design



Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D33156	A13-1 Channel LED Dream/Vertical Transmitter	7 [#] x2	-20~+60	IP 40
D33158	A13-6 Channel LED Dream/Vertical Transmitter	7 [#] x2	-20~+60	IP 40
D33170	A13-1 Channel LED Curtain Motor Transmitter	7 [#] x2	-20~+60	IP 40
D33174	A13-6 Channel Color-change LED Curtain Motor Transmitter	7 [#] x2	-20~+60	IP 40
D33201	A13-6 Channel Pavilion Multi-function Transmitter	7 [#] x2	-20~+60	IP 40



Transmitter System

- The core components are imported
- Strong compatibility
- Durable
- Push-button switch
- Humanized design



Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D33150	A13-1 Channel LED Curtain Motor Transmitter	7 [#] x2	-20~+60	IP 40
D33152	A13-2 Channel LED Curtain Motor Transmitter	7 [#] x2	-20~+60	IP 40
D33154	A13-6 Channel LED Curtain Motor Transmitter	7 [#] x2	-20~+60	IP 40



Transmitter System

- The core components are imported
- Strong compatibility
- Durable
- Push-button switch
- Humanized design



Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D33103	A13-6 Channel Vertical Blinds Transmitter	7 [#] x2	-20~+60	IP 40
D33112	A13-1 Channel Vertical Blinds Transmitter	7 [#] x2	-20~+60	IP 40
D33116	A13-6 Channel Day Night Transmitter	7 [#] x2	-20~+60	IP 40



Transmitter System

- The core components are imported
- Strong compatibility
- Durable
- Push-button switch
- Humanized design



Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D33100	A13-6 Channel White Transmitter	7 [#] x2	-20~+60	IP 40
D33101	A13 double channel curtain transmitter	7 [#] x2	-20~+60	IP 40
D33110	A13-1 Channel White Transmitter	7 [#] x2	-20~+60	IP 40



Transmitter System

- The core components are imported
- Strong compatibility
- Durable
- Push-button switch
- Humanized design



Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D33107	A13-6 Channel Dimming Up Down Remote-induction Activation	7 [#] x2	-20~+60	IP 40
D33105	A13-6 Channel Dimming Up Down Transmitter-recover	7 [#] x2	-20~+60	IP 40



Transmitter System

- The core components are imported
- Strong compatibility
- Durable
- Push-button switch
- Humanized design



Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D32003	A6-9 Channels Black Transmitter	7 [#] x2	-20~+60	IP 40
D32022	A6-99 Channels Black Transmitter	7 [#] x2	-20~+60	IP 40



Transmitter System

- The core components are imported
- Strong compatibility
- Durable
- Push-button switch
- Humanized design



Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D32035	A3-5 Whole White Locking Transmitter	CR2025 3Vx2	-20~+60	IP 40
D32036	A3-5 Whole Black Locking Transmitter	CR2025 3Vx2	-20~+60	IP 40



Transfer System

NTY Radio Device



front



back



side

Item NO	Item	Input Voltage (V)	Working temperature	Protection grade (IP)
D33097	A12 WiFi To Radio Transfer Device Eu-NTY	AC100-240	-20~+60	IP 40
D33096	A12 WiFi to Radio Transfer Device-NTY	AC100-240	-20~+60	IP 40



A9 day night transmitter

- 

The core components are imported
- 


Push-button switch
- 

Humanized design
- 

Multiple functions in one
- 

Strong compatibility
- 

Durable

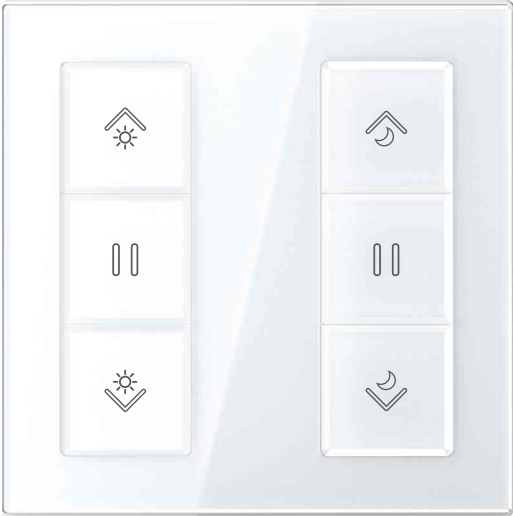

Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D32032	A9 Day Night Single Channel Sticker Transmitter	CR2430x2	-20~+60	IP 40



A9 Button Sticker Transmitter

- 

The core components are imported
- 


Push-button switch
- 

Humanized design
- 

Multiple functions in one
- 

Strong compatibility
- 

Durable

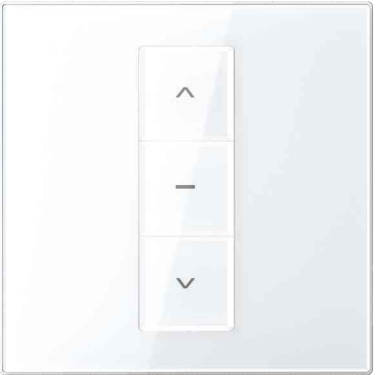

A9 single channel white sticker transmitter




A9 two channel white sticker transmitter

Item NO	Item	Battery Specifications	Working temperature	Protection grade (IP)
D32030	A9 Single Channel white Sticker Transmitter	CR2430x2	-20~+60	IP 40
D32031	A9 Two Channel white Sticker Transmitter	CR2430x2	-20~+60	IP 40
D32039	A9 Single Channel Black Sticker Transmitter	CR2430x2	-20~+60	IP 40
D32040	A9 Two Channel Black Sticker Transmitter	CR2430x2	-20~+60	IP 40



A9 Smart Home Transmitter

- Humanized design
- Push-button switch
- Strong compatibility
- Multiple functions in one
- Durable

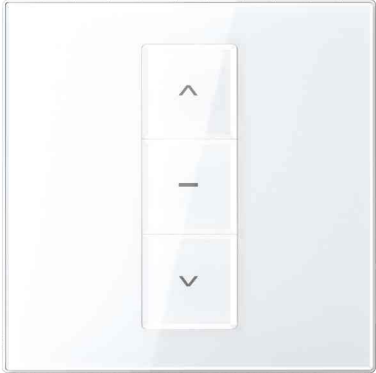

front




back

Item NO	Item	Input Voltage (V)	Output voltage (V)	Working temperature	Size
D33076	A9 Smart Home Transmitter	—	—	-20~+60	86x86mm



A9 Receiver

- The core components are imported
- Push-button switch
- Humanized design
- Multiple functions in one
- Strong compatibility
- Durable

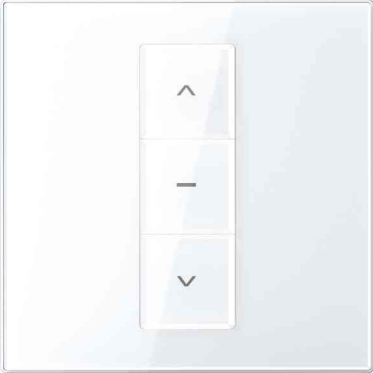

A9 single channel white sticker transmitter




A9 two channel white sticker transmitter

Item NO	Item	Input Voltage (V)	Output voltage (V)	Working temperature	Size
D33070	A9 Single Channel AC-24V-2A Receiver	AC100-240	DC24	-20~+60	86x86mm
D33071	A9 Double Channel AC-24V-1A Receiver	AC100-240	DC24	-20~+60	86x86mm
D33072	A9 Single Channel AC100-240 Receiver	AC100-240	AC100-240	-20~+60	86x86mm
D33073	A9 Double Channel AC100-240 Receiver	AC100-240	AC100-240	-20~+60	86x86mm




A9 Pulse Switch

- Humanized design
- Strong compatibility
- Durable
- Push-button switch
- Multiple functions in one

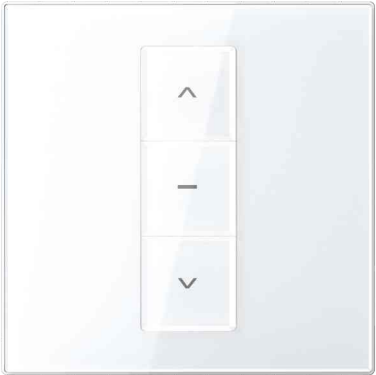

A9 Single Channel Pulse Switch

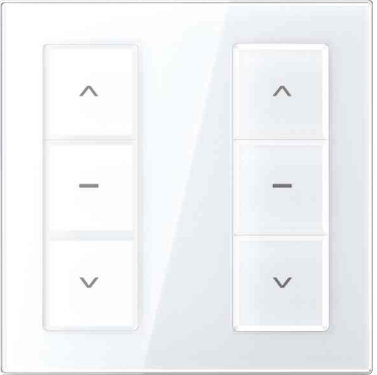

A9 Double Channels Pulse Switch



A9 Pulse Switch Side

Item NO	Item	Input Voltage (V)	Output voltage (V)	Working temperature	Size
D33074	A9 Single Channel Pulse Switch	—	—	-20~+60	86x86mm
D33075	A9 Double Channels Pulse Switch	—	—	-20~+60	86x86mm



A20 Four Channels Group Controller

A20 power bank



Function Features:

- The core components are made of first-line brand relays
- Each control has an independent safety switch, a total of 4 safety switches
- Each interface uses a spring-type terminal interface, and the wires are not easy to loosen

size: 94x61x47mm

Item NO	Item	Input Voltage (V)	Output voltage (V)	Power (W)	Size	Working temperature
D30701	A20-4 Channel 220V Group Controller	AC220	AC220	300Wx4	94x61mm	-20~+60
D34006	A20-12V Power Bank 3200mAh	DC5	DC12	/	98x40x40mm	-20~+60




Function Features:

- The core components are made of first-line brand relays
- 3200mAh lithium battery
- 5V type-C charging port

size: 98x40x40mm



A20 Solar Panel

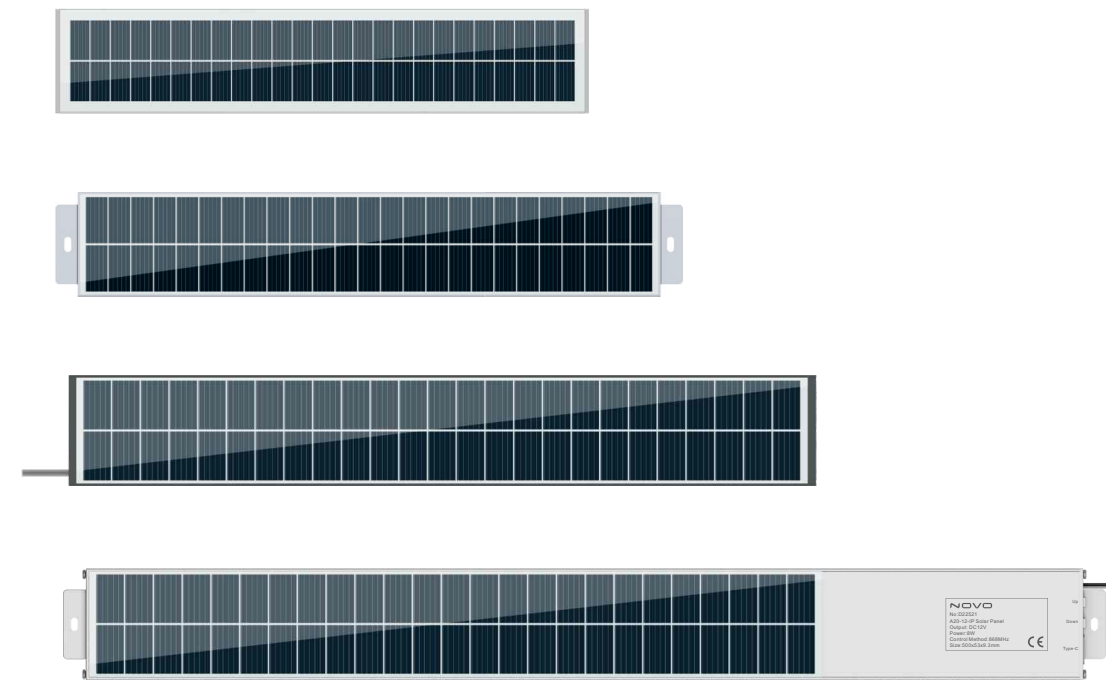

Item NO	Item	Output voltage (V)	Size (mm)
D22601	A20-18V Solar Panel	DC18V	366x70x17
D22501	A20-5V Super Thin Solar Panel TYPE-C	DC5V	380x63x9
D22531	A20-5V-E19 Embedded Solar Panel	DC5V	358x53x5
D22521	A20-12V-IP Solar Panel	DC12V	500x53x9.3



Receiver System



Item NO	Item	Battery Specifications	Input Voltage (V)	Output voltage (V)	Working temperature	Protection grade (IP)
D33131	A16 Single Channel DC5-12-1 Receiver-White	2600mAh- 2 core wire	DC5	DC12	-20~+60	IP 40
D33132	A16 Single Channel DC5-12-1 Receiver-Gray	2600mAh- 2 core wire	DC5	DC12	-20~+60	IP 40
D33133	A16 Single Channel DC5-12-1 Receiver-Black	2600mAh- 2 core wire	DC5	DC12	-20~+60	IP 40
D33135	A16 Single Channel DC5-12-1 Receiver-White	2600mAh- 4 core wire	DC5	DC12	-20~+60	IP 40
D33136	A16 Single Channel DC5-12-1 Receiver-Gray	2600mAh- 4 core wire	DC5	DC12	-20~+60	IP 40
D33137	A16 Single Channel DC5-12-1 Receiver-Black	2600mAh- 4 core wire	DC5	DC12	-20~+60	IP 40



A8 Receiver,A8 Switching Power Supply

A8 Receiver Function Features:

- High receiving sensitivity, stable center frequency and easy setting.
- Space saving
size: 129x24x23mm

A8 Switching Power Supply Function Features:

- Using international first-line brand components
- Elastic quick interface
- Occupy small space
size: 129x24x23mm



Item NO	Item	Input Voltage (V)	Output voltage (V)	Power (W)	Size	Working temperature
D33053	A8 Single 24-1 Receiver	DC24	DC24	24	129mm	-20~+60
D33054	A8-24-1 Switching Power Supply	AC100-240	DC24	24	129mm	-20~+60



A5 Receiver

Function Features:

A5 lightweight wireless control system is an advanced wireless and MCU control technology.
size: 125x26.5x24.5mm



Item NO	Item	Input Voltage (V)	Output voltage (V)	Power (W)	Size	Working temperature
D31010	A5 Single channel AC 110-240 Receiver	AC100-240	AC100-240	200	125	-20~+60
D31013	A5 Single-channel 24-6A Receiver	DC24	DC24	144	125	-20~+60
D31014	A5 Single-channel 12-6A Receiver	DC12	DC12	72	125	-20~+60



A3 Six Channels Touch Screen Receiver

Function Features:

- Acrylic panel, high surface hardness
 - Transformer + receiver integrated design
 - Each channel can drive two blinds motors
 - Six channels can drive twelve blinds motors at the same time
 - Channels can be locked freely
- Size: 172x86x44mm




Item NO	Item	Input Voltage (V)	Output voltage (V)	Power (W)	Size	Working temperature
D33051	A3 Six Channels AC-24V-1A Receiver (Touch)	AC100-240	DC24	24Wx6	172x86mm	-20~+60



A21 rain sensor transmitter with solar panel

Function Features:

- Solar power :0.3W
- Battery capacity :250mAH
- Operating temperature :-20°C to +65°C

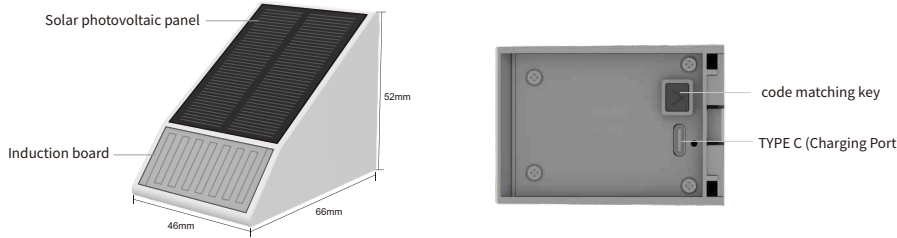

Item NO	Item	Input Voltage (V)	Output voltage (V)	Power (W)	Size	Working temperature
D35021	A21 rain sensor transmitter with solar panel	/	/	0.3	66x46x52mm	-20~+65




A21 pavilion receiver



Advantage

- Integrated design, it can control both lights and motors
- Switch between two-wire mode and three-wire mode at will
- IP66 Protection Level






Wiring method

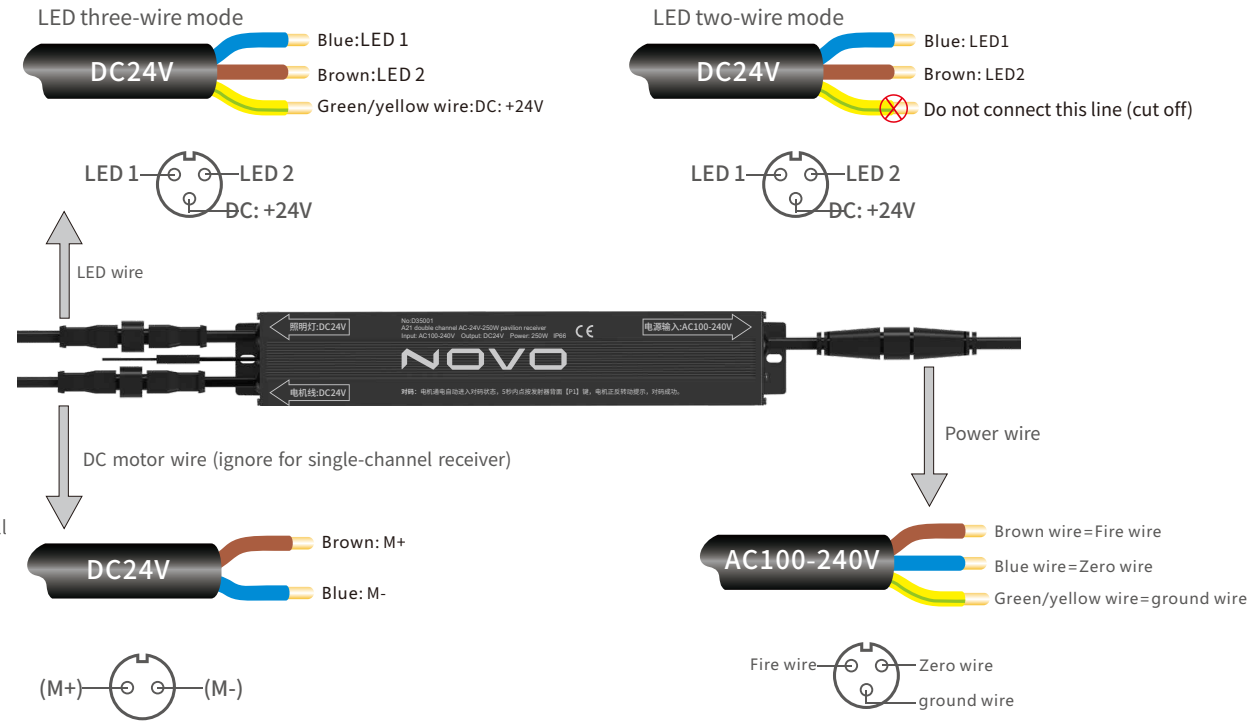

Item NO	Item	Input Voltage (V)	Output voltage (V)	Power (w)	Working temperature	Protection grade (IP)	Size
D35000	A21 Single Channel AC-24V-250W Pavilion Receiver	AC100-240V	DC 24V	250	-20~+60	IP66	305x52x35
D35001	A21 Double Channel AC-24V-250W Pavilion Receiver	AC100-240V	DC 24V	250	-20~+60	IP66	305x52x35
D35004	A21 Single Channel AC-24V-250W Pavilion Receiver-NMS	AC100-240V	DC 24V	250	-20~+60	IP66	305x52x35
D35005	Aa21 Double Channel AC-24V-250W Pavilion Receiver-NMS	AC100-240V	DC 24V	250	-20~+60	IP66	305x52x35
D35009	A21 Single Channel AC-24V-250W Pavilion Receiver-NTY	AC100-240V	DC 24V	250	-20~+60	IP66	305x52x35
D35010	A21 Double Channel AC-24V-250W Pavilion Receiver-NTY	AC100-240V	DC 24V	250	-20~+60	IP66	305x52x35

Dream/Vertical Blinds accessories

NOVO EXQUISITE accessories

							
Q10217 Q1 Vertical Blinds track loop stop	Q10219 Q1 L shape single track bracket	Q10223 Q1 double open finished track no gap seal	Q10214 T5 belt 9mm width	Q10202 Q1 Vertical Blinds track outer joiner	Q10237 Q1 seamless ancillary drive unit-left shaft	Q10238 Q1 double open gear connection drive unit	Q10241 Q1 cardan double open drive unit-clutch
Lock the first runner in drive unit Single open 1 pcs,double open 3 pcs	For side mount installation	Original patented technology products	blue color 6 core	Used when connecting tracks	patented technology	patented technology	patented technology
							
Q10203 Q1 vertical blinds runner	Q10204 Q1 Vertical Blinds carrier runner-left	Q10205 Q1 Vertical Blinds carrier runner-right	Q10211 Q1 Vertical Blinds bracket	Q10231 Q1 vertical blinds 75 space card	Q10213 Q1 vertical blinds 80 space card	Q10232 Q1 vertical blinds 85 space card	Q10212 Q1 vertical blinds 105 space card
Special for electric system can be separate with hook	4 parts one set	4 parts one set	Special for electric system Thicken and widen	For 95mm wide fabric	For 100mm wide fabric	For 105mm wide fabric	For 125mm wide fabric

Dream/Vertical Blinds accessories

NOVO EXQUISITE accessories

							
Q20200 Q2 vertical blinds empty Track-6M/pcs	Q20203 Q2 vertical blinds runner	Q20206 Q2 vertical blinds left drive unit	Q20210 Q2 vertical blinds right drive unit	Q20217 Q2 vertical blinds track loop stop	Q20238 Q2 double open gear connection drive unit	Q20250 Q2 vertical blinds longer carrier-left	Q20251 Q2 vertical blinds longer carrier-right
	patented technology				left and right drive unit	five part	five part


Curtain accessories

NOVO EXQUISITE accessories

							
N30500 N31 left drive unit double shaft	N30501 N31 right drive unit double shaft	N30505 N31 carrier 6 wheel painting white	N30507 N31 LED track 1.2mm thickness	N30510 N31 track LED light cover -PC 6.7m	N30520 N31 track bracket white	N30522 N31 track outer joiner white	H76223 white heat shrinkable tube Φ5*0.3/125°C/L10MM
							
H76217 2P-2.54 terminal UL1007 20AWG L-10mm	N30512 24V-8mm-LED light strip-20 m 3000K-24LM-cut per 6 lights	N30531 24V-8mm-LED light strip-20 m 3000K-24LM-cut per 6 lights					

Curtain accessories

NOVO EXQUISITE accessories

							
N30681 N99 trietex main drive unit white	N30683 N99 trietex main drive unit white	N30685 N99 old Somfy main drive unit white	D21603 L shape bracket (double track) Special for curtains	N10347 Trietex universal runner white soft rubber wheels 304 stainless steel ring	D21601 L shape bracket (single track) Special for curtain system	D21603 L shape bracket (double track) Special for curtain system	N10350 Trietex track invisible joiner Special for curtain system
							
N10315 N19 fold skylight T-shape pulley Easy installation for Tritex track	N10353 Trietex card carrier-long arm (unassembled) Double belt buckles,turn in different situations, imported lubricating raw materials	N10354 Trietex card carrier-short arm (unassembled) Original patented technology products, used with left and right	N10352 Trietex card carrier-long arm Double belt buckles,turn in different situations, imported lubricating raw materials	N10330 Trietex wheel carrier-long arm Double belt buckles,turn in different situations, imported lubricating raw materials	D21604 Trietex track bracket patented technology	N10344 Joiner for Trietex track High-temperature paint, high-strength new aluminum alloy, outer joiner makes the track strength better, best choice for lifting curtains	D21415 Trietex track 90 degree joiner-ABS Made of Taiwan Chimei ABS raw materials, built-in synchronous gears for smoother turning

Roller Blinds accessories

NOVO EXQUISITE accessories

D26012 motor bracket S (square hole)	D26013 Motor bracket S (square shaft head)-longer	D26022 Idler Bracket S- Square shaft	D26023 Idler Bracket S-Square shaft Strengthen	D26024 Square idler bracket S-longer	D26025 Square idler bracket S-longer+stronger	D26212 Somfy motor bracket S	D26213 Somfy motor bracket S-lengthen
Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time, 4MM thick square hole steel plate, load up to 100KG	Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time	Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time, 4MM thick square hole steel plate, load up to 100KG	Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time, 4MM thick square hole steel plate, load up to 100KG	Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time	Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time, 4MM thick square hole steel plate, load up to 100KG	Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time	Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time
D26055 Idler bracket S (round shaft)	D26057 Idler bracket S (round shaft)-longer	D26236 K25/35 motor bracket	D26235 K25/35 idler bracket	H93050 K35 cross hole plate	D26356 38mm groove idler	D26353 50 groove tube idler	D20410 50 Idler S (square axle)
Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time, built-in precision ball bearings	Matte ivory white, high-temperature paint, full 3MM thick steel plate forming at one time, built-in precision ball bearings	Matte ivory white high temperature paint 2MM thick steel plate One-time molding, shorter installation distance, more convenient and more humanized	Matte ivory white high temperature paint 2MM thick steel plate One-time molding, shorter installation distance, more convenient and more humanized		For 38mm tube	Wear-resistant, anti-aging, impact-resistance, 150-degree high-temperature resistance, 100% new imported nylon material	100% new imported nylon material, automatic injection molding with precision mold, no burrs, no water marks, smooth, anti-aging, impact resistance, high temperature resistance of 150 degrees, smoother precision ball bearings, electroplated square shaft
							D20408 55 square shaft tail plug

Roller Blinds accessories

NOVO EXQUISITE accessories

D20411 63/65 Idler S (square axle)	D20409 85 square shaft tail plug	D20430 50 round idler S	D20431 55 round shaft idler	D20432 63/65 round shaft idler	D20433 85 round shaft idler	D20513 K35 47 crown	D20514 K35-47 adaptable wheel	D20618 K35 Crown for 50 groove tube	D20617 K35 adapt wheel for 50 groove tube (cinquefoil)
D20620 K35 Crown for 55 groove tube	D20619 K35 adapt wheel for 50 groove tube (cinquefoil)	D20502 40 K35 adapt wheel (cinquefoil)	D20603 40 K35 crown	D20629 K45-60 octagonal crown	D20630 K45-60 octagonal adapter wheel	D20635 K45-70 octagonal crown	D20636 K45-70 octagonal adapter wheel	D20651 K45-70 zip screen crown	D20652 K45-70 zip screen adapt wheel
D26172 K45-60 longer octagon adapt wheel	D20515 K35-63 groove tube adapt wheel	D20516 K35-63 groove tube crown	D20506 K45-65 groove tube adapt wheel	D20606 K45-65 groove tube crown	D20632 Oversea K25-38-42 adapt wheel	D20631 Oversea K25-38-42 crown	H46356 oversea K25-40-43 adapter wheel	H46355 oversea K25-40-43 crown	

Roller Blinds accessories

NOVO EXQUISITE accessories



D20622
K45 adapt wheel-φ 63 groove tube
For 63mm groove tube



D20621
K45 crown-φ 63 groove tube
For 63mm groove tube



D20627
K45-φ85 adapt wheel
For 85mm groove tube



D20628
K45-φ85 crown
For 85mm groove tube



D20601
K35 φ40 octangle tube crown
For 40mm octagonal tube



D20511
K35 φ40 octangle adapt wheel(cinquefoil)
For 40mm octagonal tube



D60317
φ50 square hole adaptable wheel
For square shaft tubular motor



D60318
φ55 square hole adaptable wheel
For square shaft tubular motor



D60319
φ63 square hole adaptable wheel
For square shaft tubular motor



D60320
φ70 square hole adaptable wheel
For square shaft tubular motor



D60321
φ85 square hole adaptable wheel
For square shaft tubular motor



D60322
φ90 square hole adaptable wheel
For square shaft tubular motor



D26401
φ40 octagonal square hole adaptable wheel
For square shaft tubular motor



D26158
φ50-135° cardan joint S-elevating curtain-aluminum
Built-in ball bearings, made of 24mm reinforced universal shaft, can bear 100 kg



D26155
φ50-135° cardan joint S-longer-elevating curtain-aluminum
Built-in ball bearings, made of 24mm reinforced universal shaft, can bear 100 kg



D26159
φ50-135° cardan joint S-elevating curtain-aluminum
Built-in ball bearings, made of 24mm reinforced universal shaft, can bear 100 kg

Roller Blinds accessories

NOVO EXQUISITE accessories



D26156
φ55-135° cardan joint S-longer-elevating curtain-aluminum
Built-in ball bearings, made of 24mm reinforced universal shaft, can bear 100 kg



D26160
φ63-135° cardan joint S-elevating curtain-aluminum
Built-in ball bearings, made of 24mm reinforced universal shaft, can bear 100 kg



D26157
φ63-135° cardan joint S-longer-elevating curtain-aluminum
Built-in ball bearings, made of 24mm reinforced universal shaft, can bear 100 kg



D26154
φ85-135° cardan joint S-longer-elevating curtain-aluminum
Built-in ball bearings, made of 24mm reinforced universal shaft, can bear 100 kg



D26165
φ50 middle bracket-aluminium
Built-in ball bearings, 12x12 square shaft iron core with better strength, 27mm thick new aluminum alloy sleeve for high load environment



D26166
φ50 middle bracket-longer-aluminium
Built-in ball bearings, 12x12 square shaft iron core with better strength, 27mm thick new aluminum alloy sleeve for high load environment



D26167
φ55 middle bracket-aluminium
Built-in ball bearings, 12x12 square shaft iron core with better strength, 27mm thick new aluminum alloy sleeve for high load environment



D26168
φ55 middle bracket-longer-aluminium
Built-in ball bearings, 12x12 square shaft iron core with better strength, 27mm thick new aluminum alloy sleeve for high load environment



D26169
φ63 middle bracket-aluminium
Built-in ball bearings, 12x12 square shaft iron core with better strength, 27mm thick new aluminum alloy sleeve for high load environment




D26170
φ63 middle bracket-longer-aluminium
Built-in ball bearings, 12x12 square shaft iron core with better strength, 27mm thick new aluminum alloy sleeve for high load environment




D26171
φ85 middle bracket-longer-aluminium
Built-in ball bearings, made of 24mm reinforced universal shaft, can bear 100 kg




D26161
φ50-90° conical gear cardan joint-aluminium
Built-in 4 ball bearings, 4 high and low positions can be adjusted, 45-degree high-precision bevel gear transmission, 27mm thick new aluminum alloy sleeve, and can bear 100 kg



D26162
φ55-90° conical gear cardan joint-aluminium
Built-in 4 ball bearings, 4 high and low positions can be adjusted, 45-degree high-precision bevel gear transmission, 27mm thick new aluminum alloy sleeve, and can bear 100 kg



D26163
φ63/65-90° conical gear cardan joint-aluminium
Built-in 4 ball bearings, 4 high and low positions can be adjusted, 45-degree high-precision bevel gear transmission, 27mm thick new aluminum alloy sleeve, and can bear 100 kg



D26164
φ50 square hole adaptable wheel
Built-in 4 ball bearings, 4 high and low positions can be adjusted, 45-degree high-precision bevel gear transmission, 27mm thick new aluminum alloy sleeve, and can bear 100 kg



D26121
φ55 square hole adaptable wheel
rotation between 90-180 degrees, made of high-strength special steel, can bear 100KG, 24MM reinforced universal shaft, built-in precision ball bearings, matte ivory white with high-temperature baking paint

Roller Blinds accessories

NOVO EXQUISITE accessories



D26122
Φ63 square hole adaptable wheel



D26123
Φ70 square hole adaptable wheel



D26124
Φ55 90-180 degree cardan joint lengthen-S



D26125
Φ63 90-180 degree cardan joint S



D26126
Φ63 90-180 degree cardan joint lengthen-S



D26127
Φ85 90-180 degree cardan joint S



D26128
Φ50 90-180 degree cardan joint S



D26129
Φ50 90-180 degree cardan joint lengthen-S

rotation between 90-180 degrees, made of high-strength special steel, can bear 100KG, 24MM reinforced universal shaft, built-in precision ball bearings, matte ivory white with high-temperature baking paint



D26130
Φ55 90-180 degree cardan joint S



D26131
Φ55 90-180 degree cardan joint lengthen-S



D26132
Φ63 90-180 degree cardan joint S




D26133
Φ63 90-180 degree cardan joint lengthen-S




D26134
Φ85 90-180 degree cardan joint S



D26141
Φ50-90 degree conical gear cardan joint



D26142
Φ55-90 degree conical gear cardan joint



D26143
Φ63/65-90 degree conical gear cardan joint

rotation between 90-180 degrees, made of high-strength special steel, can bear 100KG, 24MM reinforced universal shaft, built-in precision ball bearings, matte ivory white with high-temperature baking paint

Built-in 4 ball bearings, imported new nylon + glass fiber sreeve, 12*12 square iron shaft core has better strength, 4 positions can be adjusted, 45-degree high-precision bevel gear transmission, can bear 100kg

Roller Blinds accessories

NOVO EXQUISITE accessories



D26144
Φ85-90 degree conical gear cardan joint



D26350
K25-50 middle bracket



D26100
Φ50 middle bracket S




D26103
Φ50 middle bracket S - longer



D26099
Φ55 middle bracket S



D26104
Φ55 middle bracket S - longer



D26097
Φ63 middle bracket S

Built-in 4 ball bearings, imported new nylon + glass fiber sreeve, 12*12 square iron shaft core has better strength, 4 positions can be adjusted, 45-degree high-precision bevel gear transmission, can bear 100kg

Built-in precision ball bearings, matte ivory white high-temperature paint, using 12 * 12 electroplated square iron shaft core, imported first-class nylon material + fiberglass, nylon sleeves with built-in square iron blocks to ensure no slipping, adapt to 150 degrees high temperature normal operation, high load without deformation, running without resistance



D26098
Φ63 middle bracket S - longer



D26101
Φ85 middle bracket S - longer



D26151
Φ50-135° cardan joint S (for elevating curtain)



D26150
Φ50-135° cardan joint S-longer (elevating curtain)



D26149
Φ55-135° cardan joint S (elevating curtain)



D26148
Φ55-135 degree cardan



D26147
Φ63/65-135° cardan joint S (elevating curtain)



D26146
Φ63/65-135° cardan joint S-longer (elevating curtain)



D26145
Φ85-135° cardan joint S-longer (elevating curtain)

Built-in precision ball bearings, matte ivory white high-temperature paint, using 12 * 12 electroplated square iron shaft core, imported first-class nylon material + fiberglass, nylon sleeves with built-in square iron blocks to ensure no slipping, adapt to 150 degrees high temperature normal operation, high load without deformation, running without resistance

Built-in ball bearings, imported new nylon + fiberglass sleeves, nylon sleeves with built-in square iron blocks that do not slip, 12 * 12 square iron shaft core with better strength, using Φ24mm reinforced universal shaft to break the industry's high-load difficulties and bearing 100 kg

Venetian Blinds accessories

NOVO EXQUISITE accessories



D23386

E19-12.5 venetian blinds
bottom rail cover



D23387

E19-16 venetian blinds
bottom rail cover



D23388

E19-16 honeycomb blinds
bottom rail cover




D23389

E19-20 up or down install
honeycomb bottom rail cover



D23390

E19 honeycomb top
rail spring bracket



D23392

E19 honeycomb top
rail side cover



D23380

E19 embedded facade
corner bracket



D23381

E19 embedded plane
corner bracket



D23384

E19-bottom rail rope
positioning part




D23385

E19-bottom rail
rope locking ring



D23405

E19 embedded
facade corner bracket



D23406

E19 embedded facade
corner bracket



D22801

E19 left spool



D22802

E19 right spool



D22805

E19 left spool-short



D22806

E19 right spool-short

Day and Night Honeycomb blinds accessories

NOVO EXQUISITE accessories




D23201

E38 day night
honeycomb bracket



D23220

E38 day night
cord lock outer ring



D23221

E38 day night
cord lock inner ring



D23230

E38 day night
blinds top rail white
side cover



D23235

E38 day night blinds
25 middle rail white
side cover



D23240

E38 day night
blinds 25 bottom rail
white side cover




D23245

E38 day night blinds
middle rail white
side cover



D23250

E38 day night
blinds 38 bottom rail
white side cover



D23261

E38 day night
blinds 25 white top rail




D23266

E38 day night
blinds 25 white
middle rail



D23271

E38 day night
blinds 25 white
bottom rail



D23281

E38 day night
blinds 38 white top rail



D23286

E38 day night
blinds 38 white
middle rail




D23291

E38 day night
blinds 38 white
bottom rail

Honeycomb Skylight Blinds accessories

NOVO EXQUISITE accessories



D23521
E24 3rd single motor skylight accessories
main ancillary transmission+carrier



D23523
E24 3rd dual motor skylight accessories
main ancillary transmission+carrier



D23524
E24 3rd dual motor skylight accessories-double open
2 main transmission+carrier



D23526
E24 3rd skylight closed loop guiding system
limit length 4.7m



D22160
E24 Skylight main drive unit II



D22161
E24 Skylight idler drive unit II



D22164
E24 skylight carrier II



D22166
E24 Skylight loop-locked guide accessories II



D21208
Φ50mm venetian 2 brackets and idler



D21201
Φ50mm venetian blind spool



D22603
Φ25mm Venetian blinds spool S

Using german bayer pc material, high temperature resistance, durable and wear-resistant, humanized hidden guiding system, width more than 1.5M

Precision mold production, considerate surface treatment process,100,000 aging tests, no burrs and no watermarks

high cost performance, no lock or overla-pping ropes, exquisite manufacturing process, high-gloss and smoth surface without water marks, compatible with 1.0-1.4 ropes,100% origina limported materials

no lock oroverlapping ropes, exquisite manufacturing process, high-gloss and smooth surface without water marks, compatible with 1.0-1.4 ropes

Skylight accessories

NOVO EXQUISITE accessories



D22020
FSS-65/63-40-600
Right Torsional Spring
Length:effective limit ≤17 circles
Width:minimum installation size ≥ 0.7 meters
Preroll 7 circles, the longest stretch ≤1.3 meters



D22021
FSS-65/63-40-800
Right Torsional Spring
Length:effective limit ≤22 circles
Width:minimum installation size ≥ 0.9 meters
Preroll 7 circles, the longest stretch ≤2.6 meters



D22022
FSS-65/63-40-1000
Right Torsional Spring
Length:effective limit ≤26 circles
Width:minimum installation size ≥1.1 meters
Preroll 7 circles, the longest stretch ≤3.7 meters



D22023
FSS-65/63-40-1300
Right Torsional Spring
Length:effective limit ≤32 circles
Width:minimum installation size ≥1.4 meters
Preroll 7 circles, the longest stretch ≤5.6 meters



D22112
FSS-85-40-600
Right Torsional Spring
Length:effective limit ≤17 circles
Width:minimum installation size ≥ 0.7 meters
Preroll 7 circles, the longest stretch ≤2 meters



D22113
FSS-85-40-800
Right Torsional Spring
Length:effective limit ≤22 circles
Width:minimum installation size ≥ 0.9meters
Preroll 7 circles, the longest stretch ≤ 3..6meters



D22114
FSS-85-40-1000
Right Torsional Spring
Length:effective limit ≤26 circles
Width:minimum installation size ≥1.1 meters
Preroll 7 circles, the longest stretch ≤5 meters



D22115
FSS-85-40-1300
Right Torsional Spring
Length:effective limit ≤32 circles
Width:minimum installation size ≥ 1.4 meters
Preroll 7 circles, the longest stretch ≤7.3 meters



D22028
FSS-90-40-600
Right Torsional Spring
Length:effective limit ≤17 circles
Width:minimum installation size ≥ 0.7 meters
Preroll 7 circles, the longest stretch ≤2.3 meters



D22029
FSS-90-40-800
Right Torsional Spring
Length:effective limit ≤22 circles
Width:minimum installation size ≥ 0.9 meters
Preroll 7 circles, the longest stretch ≤ 3.9 meters



D22030
FSS-90-40-1000
Right Torsional Spring
Length:effective limit ≤26 circles
Width:minimum installation size ≥1.1 meters
Preroll 7 circles, the longest stretch ≤5.4 meters



D22031
FSS-90-40-1300
Right Torsional Spring
Length:effective limit ≤32 circles
Width:minimum installation size ≥ 1.4 meters
Preroll 7 circles, the longest stretch ≤7.7 meters



D22104
FSS-Φ-70-40-600mm
right spring
Length:effective limit ≤17 circles
Width:minimum installation size ≥ 0.7 meters
Preroll 7 circles, the longest stretch ≤ 2.6 meters



D22105
FSS-Φ-70-40-800mm
right Spring
Length:effective limit ≤22 circles
Width:minimum installation size ≥ 0.9 meters
Preroll 7 circles, the longest stretch ≤ 3.9 meters



D22106
FSS-Φ-70-40-1000mm
right Spring
Length:effective limit ≤26 circles
Width:minimum installation size ≥ 1.1meters
Preroll 7 circles, the longest stretch ≤5.2 meters



D22107
FSS-Φ-70-40-1300mm
right Spring
Length:effective limit ≤32 circles
Width:minimum installation size ≥ 1.4 meters
Preroll 7 circles, the longest stretch ≤7.1 meters

Skylight accessories

NOVO EXQUISITE accessories



D21705
pulling pulley

For FTS and FSS



D21703
FCS guiding pulley

Stainless steel



D21702
FCS guiding pulley-slab

Stainless steel



D22149
FCS guiding pulley-cylinder

Stainless steel



D21709
Directional pulley

45 steel+ bearing



D21710
Directional pulley-Horizontal

Stainless steel



D22151
U directional pulley

Unique U-shaped design, super tensile strength, integrated forming of 3.5mm steel plate



D22150
U directional pulley-double shaft

Unique U-shaped design, super tensile strength, integrated forming of 3.5mm steel plate, precision ultra-quiet dual bearings



D22152
U directional pulley-stainless steel

3.5mm pure stainless steel, unique U-shaped design, super tensile strength



D21801
FCS pulling steel lock

FCS Must-Have Products

Common accessories

NOVO EXQUISITE accessories



D22602
Φ45 groove spool (inject nylon)

injection molding



D20701
Φ50 groove spool-white plastic

100% new material manufacturing



D21011
Φ50 U tape spool

Self-created 45-degree belt locking method.120mm outer diameter can pull more than 7 meters. No need to use extended bracket. Patented product,counterfeiting must be investigated!



D21012
Φ55 U tape spool

Self-created 45-degree belt locking method.120mm outer diameter can pull more than 7 meters. No need to use extended bracket. Patented product,counterfeiting must be investigated!



D21013
Φ63 U spool

Self-created 45-degree belt locking method.120mm outer diameter can pull more than 7 meters. No need to use extended bracket. Patented product,counterfeiting must be investigated!



D22650
Φ50 screw spool L-6.5M

New nylon+ glass fiber injection molding (ABS can not compare) Strong wear resistance, no fear of ultraviolet rays,long service life, suitable for working in 150° C high temperature and high load environment



D22652
Φ55 screw spool L-6.5M

New nylon+ glass fiber injection molding (ABS can not compare) Strong wear resistance, no fear of ultraviolet rays,long service life, suitable for working in 150° C high temperature and high load environment




D22654
Φ63 screw spool L-10M

New nylon+ glass fiber injection molding (ABS can not compare) Strong wear resistance, no fear of ultraviolet rays,long service life, suitable for working in 150° C high temperature and high load environment



D22615
Φ50 screw thread spool R-6m

High-strength new aluminum alloy, fully automatic flat machining processing,consistent notch depth, patented screw locking method



D22616
Φ50 screw thread spool R-8m

High-strength new aluminum alloy, fully automatic flat machining processing,consistent notch depth, patented screw locking method



D22626
Φ55 screw thread spool L-6m

High-strength new aluminum alloy, fully automatic flat machining processing,consistent notch depth, patented screw locking method



D22627
Φ55 screw thread spool R-8m

High-strength new aluminum alloy, fully automatic flat machining processing,consistent notch depth, patented screw locking method



D22604
Φ63 screw thread rope winder R-6m

High-strength new aluminum alloy, fully automatic flat machining processing,consistent notch depth, patented screw locking method



D22606
Φ63 screw thread rope winder R-10m

High-strength new aluminum alloy, fully automatic flat machining processing,consistent notch depth, patented screw locking method



D22623
Φ63 screw thread spool L-15m-outer diameter 112

Patented screw locking method,high-strength new aluminum alloy,fully automatic precision lathe processing, small tube can be used as big tube to reduce costs



D22621
Φ85 screw spool L-10m

High-strength new aluminum alloy, fully automatic flat machining processing,consistent notch depth, patented screw locking method


Common accessories

NOVO EXQUISITE accessories




D22620
Φ85 screw
spool L-15m

High-strength new aluminum alloy, fully automatic flat machining processing, consistent notch depth, patented screw locking method



D22631
Φ85 big outer
diameter 145 screw
spool-L 20m

Patented screw locking method, high-strength new aluminum alloy, fully automatic precision lathe processing, small tube can be used as big tube to reduce costs



D22629
Φ85 screw thread
spool R-15m-outer
diameter 145

Patented screw locking method, high-strength new aluminum alloy, fully automatic precision lathe processing, small tube can be used as big tube to reduce costs



D22614
buckle

Special for drawstring




D22612
one track lifting bracket

The lifting bracket and the buckle are integrated, easy to install, and the distance is shorter; reduce the overall cost



D22613
two tracks lifting bracket

The lifting bracket and the buckle are integrated, easy to install, and the distance is shorter; reduce the overall cost




D22227
5M two-core
PVC spring electric
wire-straight 6.7m

Natural expansion and contraction 5 meters, strong PVC, strong resilience, two-core wire straight length 6.7 meters, cost-effective




D22228
5M two-core
PU spring electric
wire-straight 6.7m

Natural expansion and contraction 5 meters, strong PU, strong resilience, two-core wire straight length 6.7 meters, cost-effective




D22229
5M three-core PVC
spring electric wire-
straight 6.7m

Natural expansion and contraction 5 meters, strong PVC, strong resilience, three-core wire straight length 6.7 meters, cost-effective




D22230
5M three-core PU
spring electric wire-
straight 6.7m

Natural expansion and contraction 5 meters, strong PU, strong resilience, three-core wire straight length 6.7 meters, cost-effective




D22236
5m 7 cores PVC
spring electric wire -
straight 7.1 m

Natural expansion and contraction 5 meters, strong PVC, strong resilience, three-core wire straight length 7.1 meters, cost-effective



D22233
7M two-core PVC
spring electric wire-
straight 9.4m

Natural expansion and contraction 7 meters, strong PVC, strong resilience, three-core wire straight length 9.4 meters, cost-effective



D22234
7M two-core PU
spring electric wire-
straight 9.4m

Natural expansion and contraction 7 meters, strong PU, strong resilience, three-core wire straight length 9.4 meters, cost-effective



D22235
7m 3 core PVC
spring electric wire-
straight 9.4m

Natural expansion and contraction 7 meters, strong PVC, strong resilience, three-core wire straight length 9.4 meters, cost-effective



D22231
7M three-core
PU spring electric
wire-straight 9.4m

Natural expansion and contraction 7 meters, strong PU, strong resilience, three-core wire straight length 9.4 meters, cost-effective

Project cases

Applicable places:
Applicable places: high-end and luxurious business star hotels and conference centers , and office buildings where elites gther ; noble and elegant villas ; warm and romantic elegant apartments.....





Venetian blind



FSS skylight shade



FCS folding skylight shade



Curtain



Venetian blind



Roller blind



Curtain



Venetian blind



Roller blind



Honeycomb blind



Roman blind



Crank arm sun-shading curtain

Install according to the side

Indoor motorized sun-shading System solutions

Household,apartments,vilas
hotel, office building



Projection screen



Curtain



Venetian blind



Roller blind



Honeycomb blind



Roman blind



FSS skylight shade



FCS folding skylight shade

Install according to the roof



Venetian blind



Roller blind

NOVO sun-shading system



Curtain



Venetian blind



Roller blind



Honeycomb blind



Light Roman blind



Roman blind



FSS skylight shade



FCS folding skylight shade



Projection screen



Crank arm sun-shading curtain

NOVO intelligent control system



Cable



Radio



Center control



Intelligent cable



Control technology



Control technology



Dry contact technology